

---

## Description

The CXM3548XR is a DP10T antenna switch for GSM /UMTS/LTE multi-mode handsets. The CXM3548XR has a CMOS SPI interface decoder. The Sony GaAs junction gate pHEMT (JPHEMT) MMIC process is used for low insertion loss and high linearity. (Application: GSM/UMTS/LTE multi-mode handsets SPI interface)

---

## Features

- ◆ Low insertion loss:                   0.7 dB (Typ.) TRx (Band 1)  
  0.9 dB (Typ.) TRx (Band 7)  
  \* including recommended circuit
- ◆ Low voltage operation:            V<sub>DD</sub> = 2.5 V
- ◆ SPI interface
- ◆ No DC blocking capacitors
- ◆ Small package size:                XQFN-26P (3.3 mm × 3.1 mm × 0.40 mm Max.)
- ◆ Lead-free and RoHS compliant

---

## Structure

- ◆ GaAs junction-gate PHEMT (JPHEMT) MMIC switch, CMOS decoder

### Note on Handling

GaAs MMIC's are ESD sensitive devices. Special handling precautions are required.


Sony reserves the right to change products and specifications without prior notice. This information does not convey any license by any implication or otherwise under any patents or other right. Application circuits shown, if any, are typical examples illustrating the operation of the devices. Sony cannot assume responsibility for any problems arising out of the use of these circuits.

**Absolute Maximum Ratings**


(Ta = 25 °C)

|  |                     |             |                                   |
|--|---------------------|-------------|-----------------------------------|
| Bias voltage                           | V <sub>DD</sub>     | 4           | V                                 |
| SPI bias voltage                       | SPI_V <sub>DD</sub> | 3.5         | V                                 |
| Input power max. (Tx1)                 |                     | 36          | dBm (Duty cycle = 12.5 % to 50 %) |
| Input power max. (Tx2)                 |                     | 34          | dBm (Duty cycle = 12.5 % to 50 %) |
| Input power max. (TRx1, 2, 3, 4, 5, 6) |                     | 32          | dBm                               |
| Input power max. (Rx1, 2)              |                     | 13          | dBm                               |
| Operating temperature                  |                     | -35 to +90  | °C                                |
| Storage temperature                    |                     | -65 to +150 | °C                                |

Block Diagram

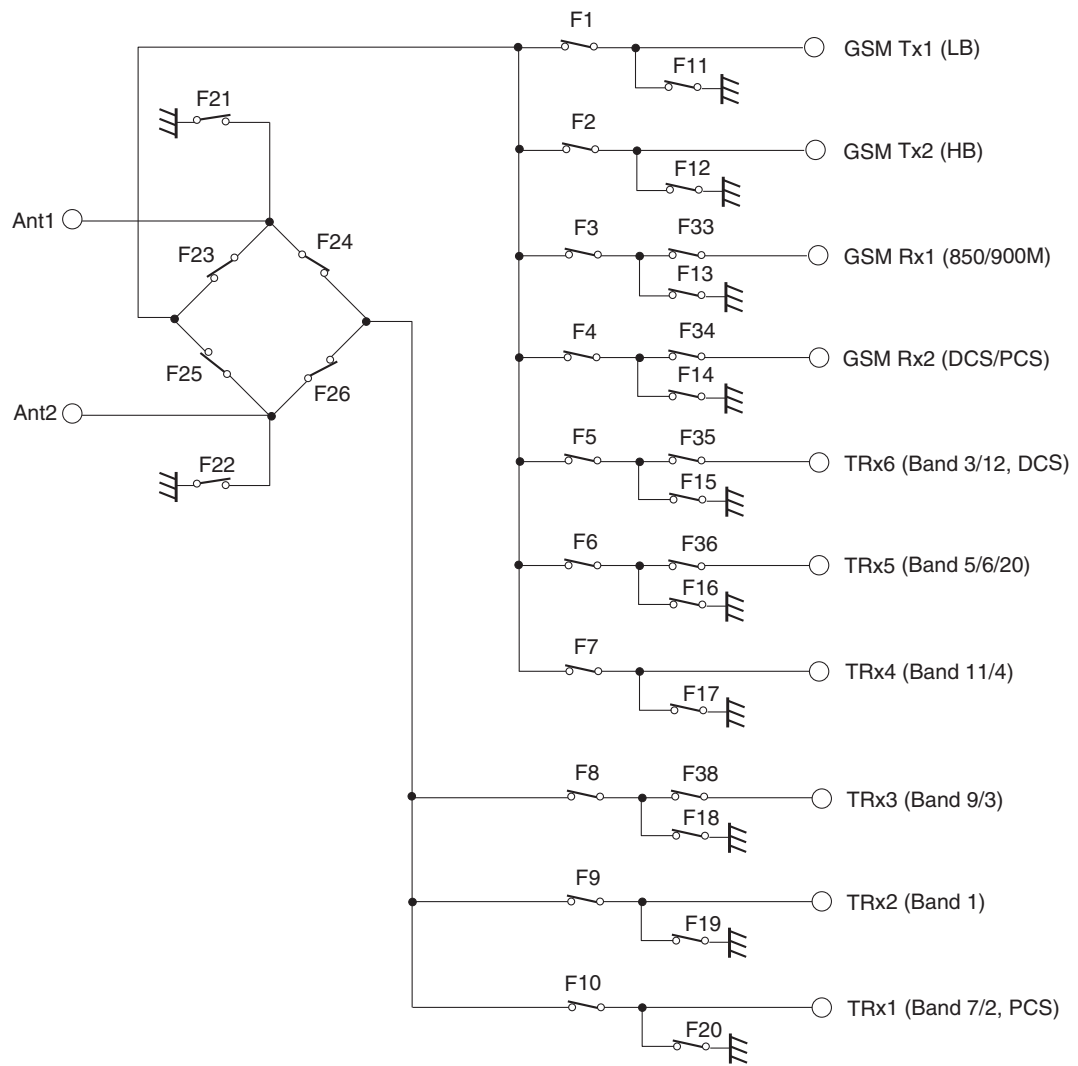

Pin Configuration

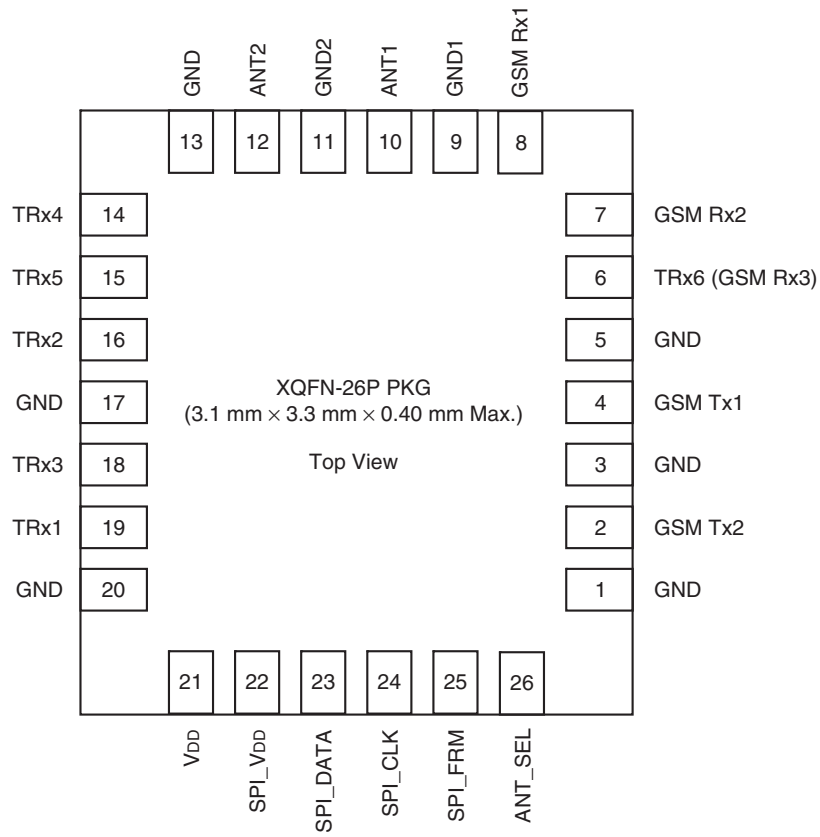


DC Bias Condition

| Item                           | Min.                      | Typ. | Max.                      | Unit |
|--------------------------------|---------------------------|------|---------------------------|------|
| V <sub>DD</sub>                | 2.5                       | 2.9  | 3.3                       | V    |
| V <sub>ctl</sub> (ANT SEL) (H) | 1.35                      | 2.9  | 3.3                       | V    |
| V <sub>ctl</sub> (ANT SEL) (L) | -0.3                      | —    | 0.45                      | V    |
| SPI_V <sub>DD</sub>            | 1.62                      | 1.8  | 1.98                      | V    |
| SPI_V <sub>ctl</sub> (H)       | SPI_V <sub>DD</sub> × 0.7 | —    | SPI_V <sub>DD</sub> + 0.3 | V    |
| SPI_V <sub>ctl</sub> (L)       | -0.3                      | —    | SPI_V <sub>DD</sub> × 0.3 | V    |

SPI Timing Characteristic

| Item             | Symbol               | Condition                                    | SPEC                  |      |      | Unit |
|------------------|----------------------|--|-----------------------|------|------|------|
|                  |                      |  | Min.                  | Min. | Min. |      |
| SPI bias current | SPI_I <sub>DD</sub>  | SPI_V <sub>DD</sub> = 1.8 V                  | —                     | 200  | 400  | μA   |
| SPI Ctrl current | SPI_I <sub>ctl</sub> | SPI_V <sub>DD</sub> = 1.8 V                  | —                     | —    | 10   | μA   |
| SPI_Enable       | SPI_EN               | SPI_V <sub>DD</sub> ↑ (90 %) to<br>SPI_FRM ↑ | 10                    | —    | —    | μs   |
| Clock frequency  | CLK_Freq             | SPI_V <sub>DD</sub> Enable                   | —                     | 26   | —    | MHz  |
| Clock cycle      | t <sub>CC</sub>      | CLK_Freq = 26 MHz                            | 34                    | 38.4 | 42   | ns   |
| Clock begin time | t <sub>CB</sub>      |  | t <sub>CC</sub> /2    | —    | —    | ns   |
| Clock end time   | t <sub>CE</sub>      |  | t <sub>CC</sub> /2    | —    | —    | ns   |
| Clock width High | t <sub>CWH</sub>     |  | t <sub>CC</sub> × 0.4 | —    | —    | ns   |
| Clock width Low  | t <sub>CWL</sub>     |  | t <sub>CC</sub> × 0.4 | —    | —    | ns   |
| Data setup time  | t <sub>DS</sub>      |  | 5                     | —    | —    | ns   |
| Data hold time   | t <sub>DH</sub>      |  | 5                     | —    | —    | ns   |

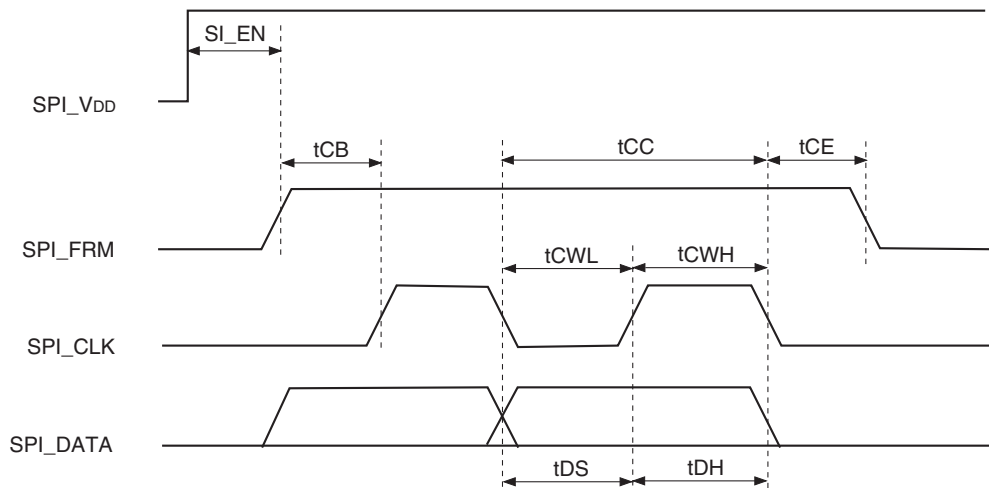

**SPI Control Specification**

| Item                       | Specification |
|----------------------------|---------------|
| Address bits               | 14 bits       |
| Data bits                  | 16 bits       |
| Total bits                 | 30 bits total |
| Clock edge (data sampling) | Rising edge   |


| Address |    | Control Data |   |
|---------|----|--------------|---|
| 29      | 16 | 15           | 0 |

MSB LSB

| 29  | 28       | 27 | 26 | 25       | 24 | 23 | 22 | 21 | 20       | 19 | 18 | 17 | 16 |
|-----|----------|----|----|----------|----|----|----|----|----------|----|----|----|----|
| R/W | Address1 |    |    | Address2 |    |    |    |    | Address3 |    |    |    |    |
| 0   | 0        | 0  | 1  | 0        | 1  | 0  | 0  | 1  | 0        | 0  | 0  | 0  | 0  |

| Port symbol       | 15       | 14      | 13      | 12      | 11       | 10       | 9        | 8            | 7        | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------|----------|---------|---------|---------|----------|----------|----------|--------------|----------|---|---|---|---|---|---|---|
|                   | GSM/UMTS | GSM_ANT | GSM_BS1 | GSM_BS2 | UMTS_BS1 | UMTS_BS2 | UMTS_BS3 | ANTS_SEL_SPI | Not Used |   |   |   |   |   |   |   |
| GSM_Tx1           | 1        | 1       | X       | 1       | X        | X        | X        | X            | X        | X | X | X | X | X | X | X |
| GSM_Tx2           | 1        | 0       | X       | 1       | X        | X        | X        | X            | X        | X | X | X | X | X | X | X |
| GSM_Rx1           | 1        | 1       | 1       | 0       | X        | X        | X        | X            | X        | X | X | X | X | X | X | X |
| GSM_Rx2           | 1        | 0       | 0       | 0       | X        | X        | X        | X            | X        | X | X | X | X | X | X | X |
| TRx6<br>(GSM_Rx3) | 0        | X       | X       | X       | 0        | 1        | 1        | X            | X        | X | X | X | X | X | X | X |
| TRx5              | 0        | X       | X       | X       | 0        | 1        | 0        | X            | X        | X | X | X | X | X | X | X |
| TRx4              | 0        | X       | X       | X       | 1        | 0        | 0        | X            | X        | X | X | X | X | X | X | X |
| TRx3              | 0        | X       | X       | X       | 1        | 1        | 0        | X            | X        | X | X | X | X | X | X | X |
| TRx2              | 0        | X       | X       | X       | 0        | 0        | 0        | X            | X        | X | X | X | X | X | X | X |
| TRx1              | 0        | X       | X       | X       | 0        | 0        | 1        | X            | X        | X | X | X | X | X | X | X |

| Port symbol | Bit 8       | Pin 26  | Active port |
|-------------|-------------|---------|-------------|
|             | ANT_SEL_SPI | ANT_SEL |             |
| ANT 1/2     | 1 (H)       | H       | ANT1        |
|             | 0 (L)       | H       | ANT2        |
|             | 1 (H)       | L       | ANT2        |
|             | 0 (L)       | L       | ANT2        |

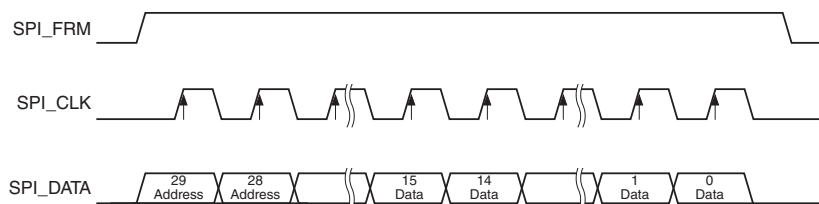

**Electrical Characteristics 1 (Ta = 25 °C)**

**DC characteristic**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, Ta = 25 °C)

| Item             | Condition   | Min. | Typ. | Max. | Unit |
|------------------|---|------|------|------|------|
| Bias current     | V <sub>DD</sub> = 2.9 V, SPI_V <sub>DD</sub> = 1.8 V                        | —    | 270  | 500  | μA   |
| SPI bias current | SPI_V <sub>DD</sub> = 1.8 V, signal input                                   | —    | 200  | 400  | μA   |
|                  | SPI_V <sub>DD</sub> = 1.8 V, No signal                                      | —    | 3.0  | 10   | μA   |
| Ctrl current     | V <sub>DD</sub> = 2.9 V, SPI_V <sub>DD</sub> = 1.8 V, V <sub>ctrl</sub> = H | —    | 0.01 | 10   | μA   |
| Wake-up time     |   | —    | —    | 100  | μs   |
| Switching time   |   | —    | 3    | 5    | μs   |

**TRx1 (Band 7, 2)**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, Ta = 25 °C, Pin = 26 dBm)

| Item             | State    | Condition  | Frequency [MHz]         | ANT1 |      |      | ANT2 |      |      | Unit             |
|------------------|----------|--|-------------------------|------|------|------|------|------|------|------------------|
|                  |          |  |                         | Min. | Typ. | Max. | Min. | Typ. | Max. |                  |
| Insertion loss   | ANT-TRx1 | Band 7   | 2500-2570               | —    | 0.88 | 1.08 | —    | 0.90 | 1.10 | dB               |
|                  |          |  | 2620-2690               | —    | 0.95 | 1.15 | —    | 1.00 | 1.20 |                  |
|                  |          | Band 2   | 1850-1910               | —    | 0.69 | 0.84 | —    | 0.69 | 0.84 | dB               |
|                  |          |  | 1930-1990               | —    | 0.70 | 0.85 | —    | 0.70 | 0.85 |                  |
| VSWR             | ANT-TRx1 | RF Port  | 1850-2690               | —    | 1.35 | 1.6  | —    | 1.3  | 1.5  | —                |
|                  |          | ANT Port   | 1850-2690               | —    | 1.35 | 1.6  | —    | 1.3  | 1.5  |                  |
| SW isolation     | ANT-TRx1 | Path: Non Active ANT-TRx1  | 2500-2690               | 16   | 22   | —    | 16   | 22   | —    | dB               |
|                  |          |  | 1850-1990               | 16   | 26   | —    | 16   | 27   | —    |                  |
| Isolation        | ANT-TRx1 | Meas. Port: TRx1-Rx2   | 1850-1910               | 22   | 49   | —    | 22   | 60   | —    | dB               |
| Rx band spurious | ANT-TRx1 |  | 1930-1990, 2620-2690    | —    | —    | -125 | —    | —    | -125 | dBm              |
| Harmonics        | ANT-TRx1 | Band 7, Band 2   | 2Tx                     | —    | —    | -44  | —    | —    | -44  | dBm/<br>3.84 MHz |
|                  |          |  | 3Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
|                  |          |  | 4Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
| ACLR             | ANT-TRx1 | ±5 MHz   | 1850-1910, 2500-2570    | —    | —    | -50  | —    | —    | -50  | dBc/<br>3.84 MHz |
|                  |          | ±10 MHz  | 1850-1910, 2500-2570    | —    | —    | -55  | —    | —    | -55  |                  |
| IMD2             | ANT-TRx1 | P <sub>tx</sub> = 21.5 dBm, P <sub>jam</sub> = -15 dBm<br>Meas. = Band 7_Rx Band | P <sub>jam</sub> = 120  | —    | -110 | -105 | —    | -109 | -104 | dBm              |
|                  |          |  | P <sub>jam</sub> = 5190 | —    | -117 | -105 | —    | -116 | -105 |                  |
|                  |          | P <sub>tx</sub> = 21.5 dBm, P <sub>jam</sub> = -15 dBm<br>Meas. = Band 2_Rx Band | P <sub>jam</sub> = 80   | —    | -113 | -105 | —    | -111 | -105 | dBm              |
|                  |          |  | P <sub>jam</sub> = 3840 | —    | -114 | -105 | —    | -114 | -105 |                  |
| IMD3             | ANT-TRx1 | P <sub>tx</sub> = 21.5 dBm, P <sub>jam</sub> = -15 dBm<br>Meas. = Band 7_Rx Band | P <sub>jam</sub> = 2415 | —    | -110 | -105 | —    | -110 | -105 | dBm              |
|                  |          |  | P <sub>jam</sub> = 7725 | —    | -115 | -105 | —    | -108 | -103 |                  |
|                  |          | P <sub>tx</sub> = 21.5 dBm, P <sub>jam</sub> = -15 dBm<br>Meas. = Band 2_Rx Band | P <sub>jam</sub> = 1800 | —    | -110 | -105 | —    | -110 | -105 | dBm              |
|                  |          |  | P <sub>jam</sub> = 5720 | —    | -117 | -105 | —    | -110 | -105 |                  |

Electrical Characteristics are measured with recommended circuit and RF ports terminated in 50 Ω.

**TRx2 (Band 1)**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, T<sub>a</sub> = 25 °C, Pin = 26 dBm)

| Item             | State    | Condition   | Frequency [MHz]         | ANT1 |      |      | ANT2 |      |      | Unit             |
|------------------|----------|---|-------------------------|------|------|------|------|------|------|------------------|
|                  |          |   |                         | Min. | Typ. | Max. | Min. | Typ. | Max. |                  |
| Insertion loss   | ANT-TRx2 | Band 1  | 1920-1980               | —    | 0.67 | 0.82 | —    | 0.69 | 0.84 | dB               |
|                  |          |   | 2110-2170               | —    | 0.70 | 0.85 | —    | 0.72 | 0.87 |                  |
| VSWR             | ANT-TRx2 | RF Port   | 1920-2170               | —    | 1.1  | 1.5  | —    | 1.1  | 1.5  | —                |
|                  |          | ANT Port  | 1920-2170               | —    | 1.1  | 1.5  | —    | 1.1  | 1.5  |                  |
| SW isolation     | ANT-TRx2 | Path: Non Active ANT-TRx2   | 1920-2170               | 16   | 24   | —    | 16   | 23   | —    | dB               |
| Isolation        | ANT-TRx2 | Meas. Port: TRx2-TRx1   | 1920-1980               | 22   | 29   | —    | 22   | 29   | —    | dB               |
|                  |          | Meas. Port: TRx2-Rx2  | 1920-1980               | 22   | 50   | —    | 22   | 60   | —    |                  |
| Rx band spurious | ANT-TRx2 |   | 2110-2170               | —    | —    | -125 | —    | —    | -125 | dBm              |
| Harmonics        | ANT-TRx2 | Band 1  | 2Tx                     | —    | —    | -44  | —    | —    | -44  | dBm/<br>3.84 MHz |
|                  |          |   | 3Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
|                  |          |   | 4Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
| ACLR             | ANT-TRx2 | ±5 MHz  | 1920-1980               | —    | —    | -50  | —    | —    | -50  | dBc/<br>3.84 MHz |
|                  |          | ±10 MHz   | 1920-1980               | —    | —    | -55  | —    | —    | -55  |                  |
| IMD2             | ANT-TRx2 | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 1 Rx_Band | P <sub>jam</sub> = 190  | —    | -110 | -105 | —    | -108 | -103 | dBm              |
|                  |          |   | P <sub>jam</sub> = 4090 | —    | -115 | -105 | —    | -110 | -105 |                  |
| IMD3             | ANT-TRx2 | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 1 Rx_Band | P <sub>jam</sub> = 1760 | —    | -111 | -105 | —    | -111 | -105 | dBm              |
|                  |          |   | P <sub>jam</sub> = 6040 | —    | -115 | -105 | —    | -113 | -105 |                  |

Electrical Characteristics are measured with recommended circuit and RF ports terminated in 50 Ω.

**TRx3 (Band 9, 3)**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, T<sub>a</sub> = 25 °C, Pin = 26 dBm)

| Item             | State    | Condition  | Frequency [MHz]         | ANT1 |      |      | ANT2 |      |      | Unit             |
|------------------|----------|--|-------------------------|------|------|------|------|------|------|------------------|
|                  |          |  |                         | Min. | Typ. | Max. | Min. | Typ. | Max. |                  |
| Insertion loss   | ANT-TRx3 | Band 9   | 1750-1785               | —    | 0.74 | 0.89 | —    | 0.74 | 0.89 | dB               |
|                  |          |  | 1845-1880               | —    | 0.75 | 0.90 | —    | 0.75 | 0.90 |                  |
|                  |          | Band 3   | 1710-1785               | —    | 0.74 | 0.89 | —    | 0.74 | 0.89 | dB               |
|                  |          |  | 1805-1880               | —    | 0.75 | 0.90 | —    | 0.75 | 0.90 |                  |
| VSWR             | ANT-TRx3 | RF Port  | 1710-1880               | —    | 1.1  | 1.5  | —    | 1.1  | 1.5  | —                |
|                  |          | ANT Port   | 1710-1880               | —    | 1.2  | 1.5  | —    | 1.2  | 1.5  |                  |
| SW isolation     | ANT-TRx3 | Path: Non Active ANT-TRx3  | 1710-1880               | 20   | 26   | —    | 22   | 27   | —    | dB               |
| Rx band spurious | ANT-TRx3 |  | 1805-1880               | —    | —    | -125 | —    | —    | -125 | dBm              |
| Harmonics        | ANT-TRx3 | Band 9, Band 3   | 2Tx                     | —    | —    | -44  | —    | —    | -44  | dBm/<br>3.84 MHz |
|                  |          |  | 3Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
|                  |          |  | 4Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
| ACLR             | ANT-TRx3 | ±5 MHz   | 1710-1785               | —    | —    | -50  | —    | —    | -50  | dBc/<br>3.84 MHz |
|                  |          | ±10 MHz  | 1710-1785               | —    | —    | -55  | —    | —    | -55  |                  |
| IMD2             | ANT-TRx3 | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 9, 3 Rx_Band | P <sub>jam</sub> = 95   | —    | -115 | -106 | —    | -114 | -106 | dBm              |
|                  |          |  | P <sub>jam</sub> = 3625 | —    | -114 | -106 | —    | -113 | -106 |                  |
| IMD3             | ANT-TRx3 | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 9, 3 Rx_Band | P <sub>jam</sub> = 1670 | —    | -110 | -105 | —    | -110 | -105 | dBm              |
|                  |          |  | P <sub>jam</sub> = 5390 | —    | -113 | -106 | —    | -111 | -106 |                  |

Electrical Characteristics are measured with recommended circuit and RF ports terminated in 50 Ω.



**TRx4 (Band 11, 4)**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, T<sub>a</sub> = 25 °C, Pin = 26 dBm)

| Item             | State    | Condition  | Frequency [MHz]         | ANT1 |      |      | ANT2 |      |      | Unit             |
|------------------|----------|--|-------------------------|------|------|------|------|------|------|------------------|
|                  |          |  |                         | Min. | Typ. | Max. | Min. | Typ. | Max. |                  |
| Insertion loss   | ANT-TRx4 | Band 11  | 1428-1463               | —    | 0.73 | 0.88 | —    | 0.77 | 0.92 | dB               |
|                  |          |  | 1476-1511               | —    | 0.76 | 0.91 | —    | 0.79 | 0.94 |                  |
|                  |          | Band 4   | 1710-1755               | —    | 0.85 | 1.00 | —    | 0.90 | 1.05 | dB               |
|                  |          |  | 2110-2155               | —    | 1.05 | 1.20 | —    | 1.20 | 1.35 |                  |
| VSWR             | ANT-TRx4 | RF Port  | 1428-1511               | —    | 1.2  | 1.5  | —    | 1.2  | 1.5  | —                |
|                  |          |  | 1710-2155               | —    | 1.45 | 1.65 | —    | 1.55 | 1.75 |                  |
|                  |          | ANT Port   | 1428-1511               | —    | 1.3  | 1.5  | —    | 1.3  | 1.5  |                  |
|                  |          |  | 1710-2155               | —    | 1.5  | 1.7  | —    | 1.6  | 1.8  |                  |
| SW isolation     | ANT-TRx4 | Path: Non Active ANT-TRx4  | 1428-1511               | 22   | 28   | —    | 20   | 26   | —    | dB               |
|                  |          |  | 1710-2155               | 16   | 22   | —    | 16   | 22   | —    |                  |
| Rx band spurious | ANT-TRx4 |  | 1476-1511, 2110-2155    | —    | —    | -125 | —    | —    | -125 | dBm              |
| Harmonics        | ANT-TRx4 | Band 11, Band 4  | 2Tx                     | —    | —    | -44  | —    | —    | -44  | dBm/<br>3.84 MHz |
|                  |          |  | 3Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
|                  |          |  | 4Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
| ACLR             | ANT-TRx4 | ±5 MHz   | 1428-1463, 1710-1755    | —    | —    | -50  | —    | —    | -50  | dBc/<br>3.84 MHz |
|                  |          | ±10 MHz  | 1428-1463, 1710-1755    | —    | —    | -55  | —    | —    | -55  |                  |
| IMD2             | ANT-TRx4 | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 11 Rx_Band | P <sub>jam</sub> = 48   | —    | -115 | -106 | —    | -115 | -106 | dBm              |
|                  |          |  | P <sub>jam</sub> = 2924 | —    | -114 | -106 | —    | -110 | -105 |                  |
|                  |          | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 4 Rx_Band  | P <sub>jam</sub> = 400  | —    | -103 | -98  | —    | -101 | -96  | dBm              |
|                  |          |  | P <sub>jam</sub> = 3860 | —    | -110 | -105 | —    | -107 | -102 |                  |
| IMD3             | ANT-TRx4 | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 11 Rx_Band | P <sub>jam</sub> = 1390 | —    | -109 | -104 | —    | -108 | -103 | dBm              |
|                  |          |  | P <sub>jam</sub> = 4362 | —    | -115 | -106 | —    | -116 | -106 |                  |
|                  |          | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 4 Rx_Band  | P <sub>jam</sub> = 1330 | —    | -106 | -101 | —    | -106 | -101 | dBm              |
|                  |          |  | P <sub>jam</sub> = 5590 | —    | -116 | -105 | —    | -115 | -105 |                  |

Electrical Characteristics are measured with recommended circuit and RF ports terminated in 50 Ω.

**TRx5 (Band 5/6, 20)**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, T<sub>a</sub> = 25 °C, Pin = 26 dBm)

| Item             | State    | Condition   | Frequency [MHz]         | ANT1 |      |      | ANT2 |      |      | Unit             |
|------------------|----------|---|-------------------------|------|------|------|------|------|------|------------------|
|                  |          |   |                         | Min. | Typ. | Max. | Min. | Typ. | Max. |                  |
| Insertion loss   | ANT-TRx5 | Band 5/6  | 824-849                 | —    | 0.73 | 0.88 | —    | 0.73 | 0.88 | dB               |
|                  |          |   | 869-894                 | —    | 0.73 | 0.88 | —    | 0.74 | 0.89 |                  |
|                  |          | Band 20   | 832-862                 | —    | 0.73 | 0.88 | —    | 0.73 | 0.88 | dB               |
|                  |          |   | 791-821                 | —    | 0.73 | 0.88 | —    | 0.73 | 0.88 |                  |
| VSWR             | ANT-TRx5 | RF Port   | 824-894                 | —    | 1.2  | 1.5  | —    | 1.2  | 1.5  | —                |
|                  |          | ANT Port  | 824-894                 | —    | 1.2  | 1.5  | —    | 1.2  | 1.5  |                  |
| SW isolation     | ANT-TRx5 | Path: Non Active ANT-TRx5   | 791-894                 | 22   | 39   | —    | 22   | 39   | —    | dB               |
| Rx band spurious | ANT-TRx5 |   | 869-894                 | —    | —    | -125 | —    | —    | -125 | dBm              |
| Harmonics        | ANT-TRx5 |   | 2Tx                     | —    | —    | -44  | —    | —    | -44  | dBm/<br>3.84 MHz |
|                  |          |   | 3Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
|                  |          |   | 4Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
| ACLR             | ANT-TRx5 | ±5 MHz  | 824-849                 | —    | —    | -50  | —    | —    | -50  | dBc/<br>3.84 MHz |
|                  |          | ±10 MHz   | 824-849                 | —    | —    | -55  | —    | —    | -55  |                  |
| IMD2             | ANT-TRx5 | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 5/6 Rx_Band | P <sub>jam</sub> = 45   | —    | -123 | -108 | —    | -123 | -108 | dBm              |
|                  |          |   | P <sub>jam</sub> = 1715 | —    | -123 | -109 | —    | -123 | -109 |                  |
|                  |          | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 20 Rx_Band  | P <sub>jam</sub> = 41   | —    | -123 | -108 | —    | -123 | -108 | dBm              |
|                  |          |   | P <sub>jam</sub> = 1653 | —    | -123 | -109 | —    | -123 | -109 |                  |
| IMD3             | ANT-TRx5 | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 5/6 Rx_Band | P <sub>jam</sub> = 790  | —    | -108 | -103 | —    | -108 | -103 | dBm              |
|                  |          |   | P <sub>jam</sub> = 2550 | —    | -112 | -105 | —    | -112 | -105 |                  |
|                  |          | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 20 Rx_Band  | P <sub>jam</sub> = 888  | —    | -108 | -103 | —    | -108 | -103 | dBm              |
|                  |          |   | P <sub>jam</sub> = 2500 | —    | -112 | -105 | —    | -112 | -105 |                  |

Electrical Characteristics are measured with recommended circuit and RF ports terminated in 50 Ω.

**TRx6 (Band 3, 12)**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, T<sub>a</sub> = 25 °C, Pin = 26 dBm)

| Item             | State    | Condition  | Frequency [MHz]         | ANT1 |      |      | ANT2 |      |      | Unit             |
|------------------|----------|--|-------------------------|------|------|------|------|------|------|------------------|
|                  |          |  |                         | Min. | Typ. | Max. | Min. | Typ. | Max. |                  |
| Insertion loss   | ANT-TRx6 | Band 3   | 1710-1785               | —    | 0.95 | 1.10 | —    | 0.86 | 1.01 | dB               |
|                  |          |  | 1805-1880               | —    | 1.01 | 1.16 | —    | 0.92 | 1.07 |                  |
|                  |          | Band 12  | 698-716                 | —    | 0.73 | 0.88 | —    | 0.73 | 0.88 | dB               |
|                  |          |  | 728-746                 | —    | 0.71 | 0.86 | —    | 0.71 | 0.86 |                  |
| VSWR             | ANT-TRx6 | RF Port  | 698-746, 1710-1880      | —    | 1.35 | 1.6  | —    | 1.25 | 1.5  | —                |
|                  |          | ANT Port   | 698-746, 1710-1880      | —    | 1.45 | 1.65 | —    | 1.3  | 1.55 |                  |
| SW isolation     | ANT-TRx6 | Path: Non Active ANT-TRx6  | 698-746                 | 22   | 43   | —    | 22   | 50   | —    | dB               |
|                  |          |  | 1710-1880               | 16   | 25   | —    | 16   | 29   | —    |                  |
| Rx band spurious | ANT-TRx6 |  | 728-746, 1805-1880      | —    | —    | -125 | —    | —    | -125 | dBm              |
| Harmonics        | ANT-TRx6 | Band 3, Band 12  | 2Tx                     | —    | —    | -44  | —    | —    | -44  | dBm/<br>3.84 MHz |
|                  |          |  | 3Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
|                  |          |  | 4Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
| ACLR             | ANT-TRx6 | ±5 MHz   | 698-716, 1710-1785      | —    | —    | -50  | —    | —    | -50  | dBc/<br>3.84 MHz |
|                  |          | ±10 MHz  | 698-716, 1710-1785      | —    | —    | -55  | —    | —    | -55  |                  |
| IMD2             | ANT-TRx6 | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 3 Rx_Band  | P <sub>jam</sub> = 95   | —    | -111 | -106 | —    | -110 | -105 | dBm              |
|                  |          |  | P <sub>jam</sub> = 3625 | —    | -113 | -106 | —    | -111 | -106 |                  |
|                  |          | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 12 Rx_Band | P <sub>jam</sub> = 30   | —    | -120 | -106 | —    | -120 | -106 | dBm              |
|                  |          |  | P <sub>jam</sub> = 1444 | —    | -115 | -105 | —    | -115 | -105 |                  |
| IMD3             | ANT-TRx6 | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 3 Rx_Band  | P <sub>jam</sub> = 1670 | —    | -108 | -103 | —    | -108 | -103 | dBm              |
|                  |          |  | P <sub>jam</sub> = 5390 | —    | -111 | -106 | —    | -112 | -106 |                  |
|                  |          | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 12 Rx_Band | P <sub>jam</sub> = 677  | —    | -108 | -103 | —    | -108 | -103 | dBm              |
|                  |          |  | P <sub>jam</sub> = 2151 | —    | -107 | -102 | —    | -107 | -102 |                  |

Electrical Characteristics are measured with recommended circuit and RF ports terminated in 50 Ω.

**GSM Tx1 (LB)**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, Ta = 25 °C, Pin = 35 dBm)

| Item             | State   | Condition                | Frequency [MHz]    | ANT1 |      |      | ANT2 |      |      | Unit          |
|------------------|---------|--------------------------|--------------------|------|------|------|------|------|------|---------------|
|                  |         |                          |                    | Min. | Typ. | Max. | Min. | Typ. | Max. |               |
| Insertion loss   | ANT-Tx1 |                          | 824-915            | —    | 0.62 | 0.77 | —    | 0.61 | 0.76 | dB            |
|                  | ANT-Tx1 | RF Port                  | 824-915            | —    | 1.25 | 1.5  | —    | 1.2  | 1.5  | —             |
|                  |         | ANT Port                 | 824-915            | —    | 1.25 | 1.5  | —    | 1.2  | 1.5  |               |
| SW isolation     | ANT-Tx1 | Path: Non Active ANT-Tx1 | 824-915            | 25   | 39   |      | 25   | 44   |      | dB            |
| Isolation Tx-Rx  | ANT-Tx1 | Meas. Port: Tx1-Rx1      | 824-915            | 31   | 46   | —    | 31   | 58   | —    | dB            |
|                  |         | Meas. Port: Tx1-Rx2      |                    | 31   | 53   | —    | 31   | 52   | —    |               |
|                  |         | Meas. Port: Tx1-TRx6     |                    | 31   | 45   | —    | 31   | 45   | —    |               |
|                  |         | Meas. Port: Tx1-TRx1     |                    | 31   | 49   | —    | 31   | 50   | —    |               |
|                  |         | Meas. Port: Tx1-TRx2     |                    | 31   | 57   | —    | 31   | 52   | —    |               |
|                  |         | Meas. Port: Tx1-TRx3     |                    | 31   | 50   | —    | 31   | 51   | —    |               |
|                  |         | Meas. Port: Tx1-TRx4     |                    | 31   | 39   | —    | 30   | 35   | —    |               |
|                  |         | Meas. Port: Tx1-TRx5     |                    | 31   | 56   | —    | 31   | 50   | —    |               |
| Isolation Tx-ANT | ANT-Rx1 |                          | 824-915            | 25   | 42   | —    | 25   | 42   | —    | dB            |
| Harmonics        | ANT-Tx1 |                          | 1648-1830 (2Tx)    | —    | -47  | -36  | —    | -47  | -36  | dBm/<br>3 MHz |
|                  |         |                          | 2472-2745 (3Tx)    | —    | -40  | -36  | —    | -40  | -36  |               |
|                  |         |                          | 3296-3660 (4Tx)    | —    | —    | -36  | —    | —    | -36  |               |
|                  |         |                          | 4120-4575 (5Tx)    | —    | —    | -42  | —    | —    | -42  |               |
|                  |         |                          | 4944-5490 (6Tx)    | —    | —    | -46  | —    | —    | -46  |               |
|                  |         |                          | 5768-6405 (7Tx)    | —    | —    | -46  | —    | —    | -46  |               |
|                  |         |                          | 6592-7320 (8Tx)    | —    | —    | -46  | —    | —    | -46  |               |
|                  |         |                          | 7416-8235 (9Tx)    | —    | —    | -46  | —    | —    | -46  |               |
|                  |         |                          | 8240-9150 (10Tx)   | —    | —    | -46  | —    | —    | -46  |               |
|                  |         |                          | 9064-10065 (11Tx)  | —    | —    | -46  | —    | —    | -46  |               |
|                  |         |                          | 9888-10980 (12Tx)  | —    | —    | -46  | —    | —    | -46  |               |
|                  |         |                          | 10712-11895 (13Tx) | —    | —    | -46  | —    | —    | -46  |               |
|                  |         |                          | 11536-12810 (14Tx) | —    | —    | -46  | —    | —    | -46  |               |
|                  |         |                          | 12360-13725 (15Tx) | —    | —    | -46  | —    | —    | -46  |               |

Electrical Characteristics are measured with recommended circuit and RF ports terminated in 50 Ω.

**GSM Rx1 (850M/900M)**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, Ta = 25 °C, Pin = 0 dBm)

| Item           | State   | Condition | Frequency [MHz]  | ANT1 |      |      | ANT2 |      |      | Unit |
|----------------|---------|-----------|------------------|------|------|------|------|------|------|------|
|                |         |           |                  | Min. | Typ. | Max. | Min. | Typ. | Max. |      |
| Insertion loss | ANT-Rx1 |           | 869-894, 925-960 | —    | 1.01 | 1.16 | —    | 0.97 | 1.12 | dB   |
| VSWR           | ANT-Rx1 | RF Port   | 869-960          | —    | 1.35 | 1.6  | —    | 1.3  | 1.5  | —    |
|                |         | ANT Port  | 869-960          | —    | 1.35 | 1.6  | —    | 1.3  | 1.5  |      |

Electrical Characteristics are measured with recommended circuit and RF ports terminated in 50 Ω.

**GSM Tx2 (HB)**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, T<sub>a</sub> = 25 °C, Pin = 32 dBm)

| Item             | State   | Condition                | Frequency [MHz]      | ANT1 |      |      | ANT2 |      |      | Unit          |
|------------------|---------|--------------------------|----------------------|------|------|------|------|------|------|---------------|
|                  |         |                          |                      | Min. | Typ. | Max. | Min. | Typ. | Max. |               |
| Insertion loss   | ANT-Tx2 |                          | 1710-1785            | —    | 0.91 | 1.06 | —    | 0.80 | 0.95 | dB            |
|                  |         |                          | 1850-1910            |      | 0.94 | 1.09 |      | 0.82 | 0.97 |               |
| VSWR             | ANT-TX2 | RF Port                  | 1710-1785, 1850-1910 | —    | 1.45 | 1.6  | —    | 1.25 | 1.5  | —             |
|                  |         | ANT Port                 | 1710-1785, 1850-1910 | —    | 1.5  | 1.65 | —    | 1.25 | 1.5  |               |
| SW isolation     | ANT-Tx2 | Path: Non Active ANT-Tx2 | 1710-1910            | 21   | 25   |      | 21   | 25   |      | dB            |
| Isolation Tx-Rx  | ANT-Tx2 | Meas. Port: Tx2-Rx1      | 1710-1785, 1850-1910 | 28   | 42   | —    | 28   | 51   | —    | dB            |
|                  |         | Meas. Port: Tx2-Rx2      |                      | 28   | 52   | —    | 28   | 50   | —    |               |
|                  |         | Meas. Port: Tx2-TRx6     |                      | 28   | 41   | —    | 28   | 40   | —    |               |
|                  |         | Meas. Port: Tx2-TRx1     |                      | 23   | 36   | —    | 23   | 36   | —    |               |
|                  |         | Meas. Port: Tx2-TRx2     |                      | 23   | 45   | —    | 23   | 43   | —    |               |
|                  |         | Meas. Port: Tx2-TRx3     |                      | 23   | 49   | —    | 23   | 51   | —    |               |
|                  |         | Meas. Port: Tx2-TRx4     |                      | 23   | 30   | —    | 23   | 29   | —    |               |
|                  |         | Meas. Port: Tx2-TRx5     |                      | 23   | 29   | —    | 21   | 26   | —    |               |
| Isolation Tx-ANT | ANT-Rx2 |                          | 1710-1910            | 22   | 31   | —    | 22   | 31   | —    | dB            |
| Harmonics        | ANT-Tx2 |                          | 3420-3570 (2Tx)      | —    | -50  | -39  | —    | -50  | -39  | dBm/<br>3 MHz |
|                  |         |                          | 3700-3820 (2Tx)      | —    | -50  | -39  | —    | -50  | -39  |               |
|                  |         |                          | 5130-5355 (3Tx)      | —    | -49  | -39  | —    | -49  | -39  |               |
|                  |         |                          | 5550-5730 (3Tx)      | —    | -49  | -39  | —    | -49  | -39  |               |
|                  |         |                          | 6840-7140 (4Tx)      | —    | —    | -42  | —    | —    | -42  |               |
|                  |         |                          | 7400-7640 (4Tx)      | —    | —    | -42  | —    | —    | -42  |               |
|                  |         |                          | 8550-8925 (5Tx)      | —    | —    | -45  | —    | —    | -45  |               |
|                  |         |                          | 9250-9550 (5Tx)      | —    | —    | -45  | —    | —    | -45  |               |
|                  |         |                          | 10260-10710 (6Tx)    | —    | —    | -45  | —    | —    | -45  |               |
|                  |         |                          | 11100-11460 (6Tx)    | —    | —    | -45  | —    | —    | -45  |               |
|                  |         |                          | 11970-12495 (7Tx)    | —    | —    | -45  | —    | —    | -45  |               |

Electrical Characteristics are measured with recommended circuit and RF ports terminated in 50 Ω.

**GSM Rx2 (DCS/PCS)**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, T<sub>a</sub> = 25 °C, Pin = 0 dBm)

| Item           | State   | Condition | Frequency [MHz] | ANT1 |      |      | ANT2 |      |      | Unit |
|----------------|---------|-----------|-----------------|------|------|------|------|------|------|------|
|                |         |           |                 | Min. | Typ. | Max. | Min. | Typ. | Max. |      |
| Insertion loss | ANT-Rx2 | DCS       | 1805-1880       | —    | 1.40 | 1.55 | —    | 1.28 | 1.43 | dB   |
|                |         | PCS       | 1930-1990       | —    | 1.48 | 1.63 | —    | 1.35 | 1.50 |      |
| VSWR           | ANT-Rx2 | RF Port   | 1805-1990       | —    | 1.45 | 1.65 | —    | 1.4  | 1.6  | —    |
|                |         | ANT Port  | 1805-1990       | —    | 1.7  | 1.9  | —    | 1.5  | 1.7  |      |

Electrical Characteristics are measured with recommended circuit and RF ports terminated in 50 Ω.

**Electrical Characteristics 2 (Ta = -30 to +85 °C)**

**DC characteristic**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, Ta = -30 to +85 °C)

| Item             | Condition   | Min. | Typ. | Max. | Unit |
|------------------|---|------|------|------|------|
| Bias current     | V <sub>DD</sub> = 2.9 V, SPI_V <sub>DD</sub> = 1.8 V                        | —    | 300  | 600  | μA   |
| SPI bias current | SPI_V <sub>DD</sub> = 1.8 V, signal input                                   | —    | 220  | 450  | μA   |
|                  | SPI_V <sub>DD</sub> = 1.8 V, No signal                                      | —    | 3.0  | 10   | μA   |
| Ctrl current     | V <sub>DD</sub> = 2.9 V, SPI_V <sub>DD</sub> = 1.8 V, V <sub>ctrl</sub> = H | —    | 0.01 | 10   | μA   |
| Wake-up time     |   | —    | —    | 100  | μs   |
| Switching time   |   | —    | —    | 5    | μs   |

**TRx1 (Band 7, 2)**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, Ta = -30 to +85 °C, Pin = 26 dBm)

| Item             | State    | Condition  | Frequency [MHz]         | ANT1 |      |      | ANT2 |      |      | Unit             |
|------------------|----------|--|-------------------------|------|------|------|------|------|------|------------------|
|                  |          |  |                         | Min. | Typ. | Max. | Min. | Typ. | Max. |                  |
| Insertion loss   | ANT-TRx1 | Band 7   | 2500-2570               | —    | —    | 1.18 | —    | —    | 1.20 | dB               |
|                  |          |  | 2620-2690               | —    | —    | 1.25 | —    | —    | 1.30 |                  |
|                  |          | Band 2   | 1850-1910               | —    | —    | 0.94 | —    | —    | 0.94 | dB               |
|                  |          |  | 1930-1990               | —    | —    | 0.95 | —    | —    | 0.95 |                  |
| VSWR             | ANT-TRx1 | RF Port  | 1850-2690               | —    | —    | 1.6  | —    | —    | 1.5  | —                |
|                  |          | ANT Port   | 1850-2690               | —    | —    | 1.6  | —    | —    | 1.5  |                  |
| SW isolation     | ANT-TRx1 | Path: Non Active ANT-TRx1  | 2500-2690               | 16   | —    | —    | 16   | —    | —    | dB               |
|                  |          |  | 1850-1990               | 16   | —    | —    | 16   | —    | —    |                  |
| Isolation        | ANT-TRx1 | Meas. Port: TRx1-Rx2   | 1850-1910               | 22   | —    | —    | 22   | —    | —    | dB               |
| Rx band spurious | ANT-TRx1 |  | 1930-1990, 2620-2690    | —    | —    | -125 | —    | —    | -125 | dBm              |
| Harmonics        | ANT-TRx1 | Band 7, Band 2   | 2Tx                     | —    | —    | -44  | —    | —    | -44  | dBm/<br>3.84 MHz |
|                  |          |  | 3Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
|                  |          |  | 4Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
| ACLR             | ANT-TRx1 | ±5 MHz   | 1850-1910, 2500-2570    | —    | —    | -50  | —    | —    | -50  | dBc/<br>3.84 MHz |
|                  |          | ±10 MHz  | 1850-1910, 2500-2570    | —    | —    | -55  | —    | —    | -55  |                  |
| IMD2             | ANT-TRx1 | P <sub>tx</sub> = 21.5 dBm, P <sub>jam</sub> = -15 dBm<br>Meas. = Band 7_Rx Band | P <sub>jam</sub> = 120  | —    | —    | -102 | —    | —    | -101 | dBm              |
|                  |          |  | P <sub>jam</sub> = 5190 | —    | —    | -102 | —    | —    | -102 |                  |
|                  |          | P <sub>tx</sub> = 21.5 dBm, P <sub>jam</sub> = -15 dBm<br>Meas. = Band 2_Rx Band | P <sub>jam</sub> = 80   | —    | —    | -102 | —    | —    | -102 | dBm              |
|                  |          |  | P <sub>jam</sub> = 3840 | —    | —    | -102 | —    | —    | -102 |                  |
| IMD3             | ANT-TRx1 | P <sub>tx</sub> = 21.5 dBm, P <sub>jam</sub> = -15 dBm<br>Meas. = Band 7_Rx Band | P <sub>jam</sub> = 2415 | —    | —    | -102 | —    | —    | -102 | dBm              |
|                  |          |  | P <sub>jam</sub> = 7725 | —    | —    | -102 | —    | —    | -100 |                  |
|                  |          | P <sub>tx</sub> = 21.5 dBm, P <sub>jam</sub> = -15 dBm<br>Meas. = Band 2_Rx Band | P <sub>jam</sub> = 1800 | —    | —    | -102 | —    | —    | -102 | dBm              |
|                  |          |  | P <sub>jam</sub> = 5720 | —    | —    | -102 | —    | —    | -102 |                  |

Electrical Characteristics are measured with recommended circuit and RF ports terminated in 50 Ω.

**TRx2 (Band 1)**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, T<sub>a</sub> = -30 to +85 °C, Pin = 26 dBm)

| Item             | State    | Condition   | Frequency [MHz]         | ANT1 |      |      | ANT2 |      |      | Unit             |
|------------------|----------|---|-------------------------|------|------|------|------|------|------|------------------|
|                  |          |   |                         | Min. | Typ. | Max. | Min. | Typ. | Max. |                  |
| Insertion loss   | ANT-TRx2 | Band 1  | 1920-1980               | —    | —    | 0.92 | —    | —    | 0.94 | dB               |
|                  |          |   | 2110-2170               | —    | —    | 0.95 | —    | —    | 0.97 |                  |
| VSWR             | ANT-TRx2 | RF Port   | 1920-2170               | —    | —    | 1.5  | —    | —    | 1.5  | —                |
|                  |          | ANT Port  | 1920-2170               | —    | —    | 1.5  | —    | —    | 1.5  |                  |
| SW isolation     | ANT-TRx2 | Path: Non Active ANT-TRx2   | 1920-2170               | 16   | —    | —    | 16   | —    | —    | dB               |
| Isolation        | ANT-TRx2 | Meas. Port: TRx2-TRx1   | 1920-1980               | 22   | —    | —    | 22   | —    | —    | dB               |
|                  |          | Meas. Port: TRx2-Rx2  | 1920-1980               | 22   | —    | —    | 22   | —    | —    |                  |
| Rx band spurious | ANT-TRx2 |   | 2110-2170               | —    | —    | -125 | —    | —    | -125 | dBm              |
| Harmonics        | ANT-TRx2 | Band 1  | 2Tx                     | —    | —    | -44  | —    | —    | -44  | dBm/<br>3.84 MHz |
|                  |          |   | 3Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
|                  |          |   | 4Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
| ACLR             | ANT-TRx2 | ±5 MHz  | 1920-1980               | —    | —    | -50  | —    | —    | -50  | dBc/<br>3.84 MHz |
|                  |          | ±10 MHz   | 1920-1980               | —    | —    | -55  | —    | —    | -55  |                  |
| IMD2             | ANT-TRx2 | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 1 Rx_Band | P <sub>jam</sub> = 190  | —    | —    | -102 | —    | —    | -100 | dBm              |
|                  |          |   | P <sub>jam</sub> = 4090 | —    | —    | -102 | —    | —    | -102 |                  |
| IMD3             | ANT-TRx2 | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 1 Rx_Band | P <sub>jam</sub> = 1760 | —    | —    | -102 | —    | —    | -102 | dBm              |
|                  |          |   | P <sub>jam</sub> = 6040 | —    | —    | -102 | —    | —    | -102 |                  |

Electrical Characteristics are measured with recommended circuit and RF ports terminated in 50 Ω.

**TRx3 (Band 9, 3)**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, T<sub>a</sub> = -30 to +85 °C, Pin = 26 dBm)

| Item             | State    | Condition  | Frequency [MHz]         | ANT1 |      |      | ANT2 |      |      | Unit             |
|------------------|----------|--|-------------------------|------|------|------|------|------|------|------------------|
|                  |          |  |                         | Min. | Typ. | Max. | Min. | Typ. | Max. |                  |
| Insertion loss   | ANT-TRx3 | Band 9   | 1750-1785               | —    | —    | 0.99 | —    | —    | 0.99 | dB               |
|                  |          |  | 1845-1880               | —    | —    | 1.00 | —    | —    | 1.00 |                  |
|                  |          | Band 3   | 1710-1785               | —    | —    | 0.99 | —    | —    | 0.99 | dB               |
|                  |          |  | 1805-1880               | —    | —    | 1.00 | —    | —    | 1.00 |                  |
| VSWR             | ANT-TRx3 | RF Port  | 1710-1880               | —    | —    | 1.5  | —    | —    | 1.5  | —                |
|                  |          | ANT Port   | 1710-1880               | —    | —    | 1.5  | —    | —    | 1.5  |                  |
| SW isolation     | ANT-TRx3 | Path: Non Active ANT-TRx3  | 1710-1880               | 20   | —    | —    | 22   | —    | —    | dB               |
| Rx band spurious | ANT-TRx3 |  | 1805-1880               | —    | —    | -125 | —    | —    | -125 | dBm              |
| Harmonics        | ANT-TRx3 | Band 9, Band 3   | 2Tx                     | —    | —    | -44  | —    | —    | -44  | dBm/<br>3.84 MHz |
|                  |          |  | 3Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
|                  |          |  | 4Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
| ACLR             | ANT-TRx3 | ±5 MHz   | 1710-1785               | —    | —    | -50  | —    | —    | -50  | dBc/<br>3.84 MHz |
|                  |          | ±10 MHz  | 1710-1785               | —    | —    | -55  | —    | —    | -55  |                  |
| IMD2             | ANT-TRx3 | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 9, 3 Rx_Band | P <sub>jam</sub> = 95   | —    | —    | -103 | —    | —    | -103 | dBm              |
|                  |          |  | P <sub>jam</sub> = 3625 | —    | —    | -103 | —    | —    | -103 |                  |
| IMD3             | ANT-TRx3 | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 9, 3 Rx_Band | P <sub>jam</sub> = 1670 | —    | —    | -102 | —    | —    | -102 | dBm              |
|                  |          |  | P <sub>jam</sub> = 5390 | —    | —    | -103 | —    | —    | -103 |                  |

Electrical Characteristics are measured with recommended circuit and RF ports terminated in 50 Ω.

**TRx4 (Band 11, 4)**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, T<sub>a</sub> = -30 to +85 °C, Pin = 26 dBm)

| Item             | State    | Condition  | Frequency [MHz]         | ANT1 |      |      | ANT2 |      |      | Unit             |
|------------------|----------|--|-------------------------|------|------|------|------|------|------|------------------|
|                  |          |  |                         | Min. | Typ. | Max. | Min. | Typ. | Max. |                  |
| Insertion loss   | ANT-TRx4 | Band 11  | 1428-1463               | —    | —    | 0.98 | —    | —    | 1.02 | dB               |
|                  |          |  | 1476-1511               | —    | —    | 1.01 | —    | —    | 1.04 |                  |
|                  |          | Band 4   | 1710-1755               | —    | —    | 1.10 | —    | —    | 1.15 | dB               |
|                  |          |  | 2110-2155               | —    | —    | 1.30 | —    | —    | 1.45 |                  |
| VSWR             | ANT-TRx4 | RF Port  | 1428-1511               | —    | —    | 1.5  | —    | —    | 1.5  | —                |
|                  |          |  | 1710-2155               | —    | —    | 1.65 | —    | —    | 1.75 |                  |
|                  |          | ANT Port   | 1428-1511               | —    | —    | 1.5  | —    | —    | 1.5  |                  |
|                  |          |  | 1710-2155               | —    | —    | 1.7  | —    | —    | 1.8  |                  |
| SW isolation     | ANT-TRx4 | Path: Non Active ANT-TRx4  | 1428-1511               | 22   | —    | —    | 20   | —    | —    | dB               |
|                  |          |  | 1710-2155               | 16   | —    | —    | 16   | —    | —    |                  |
| Rx band spurious | ANT-TRx4 |  | 1476-1511, 2110-2155    | —    | —    | -125 | —    | —    | -125 | dBm              |
| Harmonics        | ANT-TRx4 | Band 11, Band 4  | 2Tx                     | —    | —    | -44  | —    | —    | -44  | dBm/<br>3.84 MHz |
|                  |          |  | 3Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
|                  |          |  | 4Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
| ACLR             | ANT-TRx4 | ±5 MHz   | 1428-1463, 1710-1755    | —    | —    | -50  | —    | —    | -50  | dBc/<br>3.84 MHz |
|                  |          | ±10 MHz  | 1428-1463, 1710-1755    | —    | —    | -55  | —    | —    | -55  |                  |
| IMD2             | ANT-TRx4 | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 11 Rx_Band | P <sub>jam</sub> = 48   | —    | —    | -103 | —    | —    | -103 | dBm              |
|                  |          |  | P <sub>jam</sub> = 2924 | —    | —    | -103 | —    | —    | -102 |                  |
|                  |          | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 4 Rx_Band  | P <sub>jam</sub> = 400  | —    | —    | -95  | —    | —    | -93  | dBm              |
|                  |          |  | P <sub>jam</sub> = 3860 | —    | —    | -102 | —    | —    | -99  |                  |
| IMD3             | ANT-TRx4 | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 11 Rx_Band | P <sub>jam</sub> = 1390 | —    | —    | -101 | —    | —    | -100 | dBm              |
|                  |          |  | P <sub>jam</sub> = 4362 | —    | —    | -103 | —    | —    | -103 |                  |
|                  |          | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 4 Rx_Band  | P <sub>jam</sub> = 1330 | —    | —    | -98  | —    | —    | -98  | dBm              |
|                  |          |  | P <sub>jam</sub> = 5590 | —    | —    | -102 | —    | —    | -102 |                  |

Electrical Characteristics are measured with recommended circuit and RF ports terminated in 50 Ω.



**TRx5 (Band 5/6, 20)**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, T<sub>a</sub> = -30 to +85 °C, Pin = 26 dBm)

| Item             | State    | Condition   | Frequency [MHz]         | ANT1 |      |      | ANT2 |      |      | Unit             |
|------------------|----------|---|-------------------------|------|------|------|------|------|------|------------------|
|                  |          |   |                         | Min. | Typ. | Max. | Min. | Typ. | Max. |                  |
| Insertion loss   | ANT-TRx5 | Band 5/6  | 824-849                 | —    | —    | 0.98 | —    | —    | 0.98 | dB               |
|                  |          |   | 869-894                 | —    | —    | 0.98 | —    | —    | 0.99 |                  |
|                  |          | Band 20   | 832-862                 | —    | —    | 0.98 | —    | —    | 0.98 | dB               |
|                  |          |   | 791-821                 | —    | —    | 0.98 | —    | —    | 0.98 |                  |
| VSWR             | ANT-TRx5 | RF Port   | 824-894                 | —    | —    | 1.5  | —    | —    | 1.5  | —                |
|                  |          | ANT Port  | 824-894                 | —    | —    | 1.5  | —    | —    | 1.5  |                  |
| SW isolation     | ANT-TRx5 | Path: Non Active ANT-TRx5   | 791-894                 | 22   | —    | —    | 22   | —    | —    | dB               |
| Rx band spurious | ANT-TRx5 |   | 869-894                 | —    | —    | -125 | —    | —    | -125 | dBm              |
| Harmonics        | ANT-TRx5 |   | 2Tx                     | —    | —    | -44  | —    | —    | -44  | dBm/<br>3.84 MHz |
|                  |          |   | 3Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
|                  |          |   | 4Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
| ACLR             | ANT-TRx5 | ±5 MHz  | 824-849                 | —    | —    | -50  | —    | —    | -50  | dBc/<br>3.84 MHz |
|                  |          | ±10 MHz   | 824-849                 | —    | —    | -55  | —    | —    | -55  |                  |
| IMD2             | ANT-TRx5 | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 5/6 Rx_Band | P <sub>jam</sub> = 45   | —    | —    | -105 | —    | —    | -105 | dBm              |
|                  |          |   | P <sub>jam</sub> = 1715 | —    | —    | -106 | —    | —    | -106 |                  |
|                  |          | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 20 Rx_Band  | P <sub>jam</sub> = 41   | —    | —    | -105 | —    | —    | -105 | dBm              |
|                  |          |   | P <sub>jam</sub> = 1653 | —    | —    | -106 | —    | —    | -106 |                  |
| IMD3             | ANT-TRx5 | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 5/6 Rx_Band | P <sub>jam</sub> = 790  | —    | —    | -100 | —    | —    | -100 | dBm              |
|                  |          |   | P <sub>jam</sub> = 2550 | —    | —    | -102 | —    | —    | -102 |                  |
|                  |          | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 20 Rx_Band  | P <sub>jam</sub> = 888  | —    | —    | -100 | —    | —    | -100 | dBm              |
|                  |          |   | P <sub>jam</sub> = 2500 | —    | —    | -102 | —    | —    | -102 |                  |

Electrical Characteristics are measured with recommended circuit and RF ports terminated in 50 Ω.

**TRx6 (Band 3, 12)**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, T<sub>a</sub> = -30 to +85 °C , Pin = 26 dBm)

| Item             | State    | Condition  | Frequency [MHz]         | ANT1 |      |      | ANT2 |      |      | Unit             |
|------------------|----------|--|-------------------------|------|------|------|------|------|------|------------------|
|                  |          |  |                         | Min. | Typ. | Max. | Min. | Typ. | Max. |                  |
| Insertion loss   | ANT-TRx6 | Band 3   | 1710-1785               | —    | —    | 1.20 | —    | —    | 1.11 | dB               |
|                  |          |  | 1805-1880               | —    | —    | 1.26 | —    | —    | 1.17 |                  |
|                  |          | Band 12  | 698-716                 | —    | —    | 0.98 | —    | —    | 0.98 | dB               |
|                  |          |  | 728-746                 | —    | —    | 0.96 | —    | —    | 0.96 |                  |
| VSWR             | ANT-TRx6 | RF Port  | 698-746, 1710-1880      | —    | —    | 1.6  | —    | —    | 1.5  | —                |
|                  |          | ANT Port   | 698-746, 1710-1880      | —    | —    | 1.65 | —    | —    | 1.55 |                  |
| SW isolation     | ANT-TRx6 | Path: Non Active ANT-TRx6  | 698-746                 | 22   | —    | —    | 22   | —    | —    | dB               |
|                  |          |  | 1710-1880               | 16   | —    | —    | 16   | —    | —    |                  |
| Rx band spurious | ANT-TRx6 |  | 728-746, 1805-1880      | —    | —    | -125 | —    | —    | -125 | dBm              |
| Harmonics        | ANT-TRx6 | Band 3, Band 12  | 2Tx                     | —    | —    | -44  | —    | —    | -44  | dBm/<br>3.84 MHz |
|                  |          |  | 3Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
|                  |          |  | 4Tx                     | —    | —    | -44  | —    | —    | -44  |                  |
| ACLR             | ANT-TRx6 | ±5 MHz   | 698-716, 1710-1785      | —    | —    | -50  | —    | —    | -50  | dBc/<br>3.84 MHz |
|                  |          | ±10 MHz  | 698-716, 1710-1785      | —    | —    | -55  | —    | —    | -55  |                  |
| IMD2             | ANT-TRx6 | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 3 Rx_Band  | P <sub>jam</sub> = 95   | —    | —    | -103 | —    | —    | -102 | dBm              |
|                  |          |  | P <sub>jam</sub> = 3625 | —    | —    | -103 | —    | —    | -103 |                  |
|                  |          | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 12 Rx_Band | P <sub>jam</sub> = 30   | —    | —    | -103 | —    | —    | -103 | dBm              |
|                  |          |  | P <sub>jam</sub> = 1444 | —    | —    | -102 | —    | —    | -102 |                  |
| IMD3             | ANT-TRx6 | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 3 Rx_Band  | P <sub>jam</sub> = 1670 | —    | —    | -100 | —    | —    | -100 | dBm              |
|                  |          |  | P <sub>jam</sub> = 5390 | —    | —    | -103 | —    | —    | -103 |                  |
|                  |          | P <sub>tx</sub> = 21.5 dBm,<br>P <sub>jam</sub> = -15 dBm<br>Meas. = Band 12 Rx_Band | P <sub>jam</sub> = 677  | —    | —    | -100 | —    | —    | -100 | dBm              |
|                  |          |  | P <sub>jam</sub> = 2151 | —    | —    | -99  | —    | —    | -99  |                  |

Electrical Characteristics are measured with recommended circuit and RF ports terminated in 50 Ω.

**GSM Tx1 (LB)**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, T<sub>a</sub> = -30 to +85 °C, Pin = 35 dBm)

| Item                 | State              | Condition                | Frequency [MHz]    | ANT1 |      |      | ANT2 |      |      | Unit          |
|----------------------|--------------------|--------------------------|--------------------|------|------|------|------|------|------|---------------|
|                      |                    |                          |                    | Min. | Typ. | Max. | Min. | Typ. | Max. |               |
| Insertion loss       | ANT-Tx1            |                          | 824-915            | —    | —    | 0.87 | —    | —    | 0.86 | dB            |
|                      | ANT-Tx1            | RF Port                  | 824-915            | —    | —    | 1.5  | —    | —    | 1.5  | —             |
|                      |                    | ANT Port                 | 824-915            | —    | —    | 1.5  | —    | —    | 1.5  |               |
| SW isolation         | ANT-Tx1            | Path: Non Active ANT-Tx1 | 824-915            | 25   | —    |      | 25   | —    |      | dB            |
| Isolation Tx-Rx      | ANT-Tx1            | Meas. Port: Tx1-Rx1      | 824-915            | 31   | —    | —    | 31   | —    | —    | dB            |
|                      |                    | Meas. Port: Tx1-Rx2      |                    | 31   | —    | —    | 31   | —    | —    |               |
|                      |                    | Meas. Port: Tx1-TRx6     |                    | 31   | —    | —    | 31   | —    | —    |               |
|                      |                    | Meas. Port: Tx1-TRx1     |                    | 31   | —    | —    | 31   | —    | —    |               |
|                      |                    | Meas. Port: Tx1-TRx2     |                    | 31   | —    | —    | 31   | —    | —    |               |
|                      |                    | Meas. Port: Tx1-TRx3     |                    | 31   | —    | —    | 31   | —    | —    |               |
|                      |                    | Meas. Port: Tx1-TRx4     |                    | 31   | —    | —    | 30   | —    | —    |               |
| Meas. Port: Tx1-TRx5 | 31                 | —                        | —                  | 31   | —    | —    |      |      |      |               |
| Isolation Tx-ANT     | ANT-Rx1            |                          | 824-915            | 25   | —    | —    | 25   | —    | —    | dB            |
| Harmonics            | ANT-Tx1            |                          | 1648-1830 (2Tx)    | —    | —    | -36  | —    | —    | -36  | dBm/<br>3 MHz |
|                      |                    |                          | 2472-2745 (3Tx)    | —    | —    | -36  | —    | —    | -36  |               |
|                      |                    |                          | 3296-3660 (4Tx)    | —    | —    | -36  | —    | —    | -36  |               |
|                      |                    |                          | 4120-4575 (5Tx)    | —    | —    | -42  | —    | —    | -42  |               |
|                      |                    |                          | 4944-5490 (6Tx)    | —    | —    | -46  | —    | —    | -46  |               |
|                      |                    |                          | 5768-6405 (7Tx)    | —    | —    | -46  | —    | —    | -46  |               |
|                      |                    |                          | 6592-7320 (8Tx)    | —    | —    | -46  | —    | —    | -46  |               |
|                      |                    |                          | 7416-8235 (9Tx)    | —    | —    | -46  | —    | —    | -46  |               |
|                      |                    |                          | 8240-9150 (10Tx)   | —    | —    | -46  | —    | —    | -46  |               |
|                      |                    |                          | 9064-10065 (11Tx)  | —    | —    | -46  | —    | —    | -46  |               |
|                      |                    |                          | 9888-10980 (12Tx)  | —    | —    | -46  | —    | —    | -46  |               |
|                      |                    |                          | 10712-1189 (13Tx)  | —    | —    | -46  | —    | —    | -46  |               |
|                      |                    |                          | 11536-12810 (14Tx) | —    | —    | -46  | —    | —    | -46  |               |
|                      | 12360-13725 (15Tx) | —                        | —                  | -46  | —    | —    | -46  |      |      |               |

Electrical Characteristics are measured with recommended circuit and RF ports terminated in 50 Ω.

**GSM Rx1 (850M/900M)**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, T<sub>a</sub> = -30 to +85 °C, Pin = 0 dBm)

| Item           | State   | Condition | Frequency [MHz]  | ANT1 |      |      | ANT2 |      |      | Unit |
|----------------|---------|-----------|------------------|------|------|------|------|------|------|------|
|                |         |           |                  | Min. | Typ. | Max. | Min. | Typ. | Max. |      |
| Insertion loss | ANT-Rx1 |           | 869-894, 925-960 | —    | —    | 1.26 | —    | —    | 1.22 | dB   |
| VSWR           | ANT-Rx1 | RF Port   | 869-960          | —    | —    | 1.6  | —    | —    | 1.5  | —    |
|                |         | ANT Port  | 869-960          | —    | —    | 1.6  | —    | —    | 1.5  |      |

Electrical Characteristics are measured with recommended circuit and RF ports terminated in 50 Ω.

**GSM Tx2 (HB)**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, T<sub>a</sub> = -30 to +85 °C, Pin = 32 dBm)

| Item              | State   | Condition                | Frequency [MHz]      | ANT1 |      |      | ANT2 |      |      | Unit          |
|-------------------|---------|--------------------------|----------------------|------|------|------|------|------|------|---------------|
|                   |         |                          |                      | Min. | Typ. | Max. | Min. | Typ. | Max. |               |
| Insertion loss    | ANT-Tx2 |                          | 1710-1785            | —    | —    | 1.16 | —    | —    | 1.05 | dB            |
|                   |         |                          | 1850-1910            | —    | —    | 1.19 | —    | —    | 1.07 |               |
| VSWR              | ANT-Tx2 | RF Port                  | 1710-1785, 1850-1910 | —    | —    | 1.6  | —    | —    | 1.5  | —             |
|                   |         | ANT Port                 | 1710-1785, 1850-1910 | —    | —    | 1.65 | —    | —    | 1.5  |               |
| SW isolation      | ANT-Tx2 | Path: Non Active ANT-Tx2 | 1710-1910            | 21   | —    | —    | 21   | —    | —    | dB            |
| Isolation Tx-Rx   | ANT-Tx2 | Meas. Port: Tx2-Rx1      | 1710-1785, 1850-1910 | 28   | —    | —    | 28   | —    | —    | dB            |
|                   |         | Meas. Port: Tx2-Rx2      |                      | 28   | —    | —    | 28   | —    | —    |               |
|                   |         | Meas. Port: Tx2-TRx6     |                      | 28   | —    | —    | 28   | —    | —    |               |
|                   |         | Meas. Port: Tx2-TRx1     |                      | 23   | —    | —    | 23   | —    | —    |               |
|                   |         | Meas. Port: Tx2-TRx2     |                      | 23   | —    | —    | 23   | —    | —    |               |
|                   |         | Meas. Port: Tx2-TRx3     |                      | 23   | —    | —    | 23   | —    | —    |               |
|                   |         | Meas. Port: Tx2-TRx4     |                      | 23   | —    | —    | 23   | —    | —    |               |
|                   |         | Meas. Port: Tx2-TRx5     |                      | 23   | —    | —    | 21   | —    | —    |               |
| Isolation Tx-ANT  | ANT-Rx2 |                          | 1710-1910            | 22   | —    | —    | 22   | —    | —    | dB            |
| Harmonics         | ANT-Tx2 |                          | 3420-3570 (2Tx)      | —    | —    | -39  | —    | —    | -39  | dBm/<br>3 MHz |
|                   |         |                          | 3700-3820 (2Tx)      | —    | —    | -39  | —    | —    | -39  |               |
|                   |         |                          | 5130-5355 (3Tx)      | —    | —    | -39  | —    | —    | -39  |               |
|                   |         |                          | 5550-5730 (3Tx)      | —    | —    | -39  | —    | —    | -39  |               |
|                   |         |                          | 6840-7140 (4Tx)      | —    | —    | -42  | —    | —    | -42  |               |
|                   |         |                          | 7400-7640 (4Tx)      | —    | —    | -42  | —    | —    | -42  |               |
|                   |         |                          | 8550-8925 (5Tx)      | —    | —    | -45  | —    | —    | -45  |               |
|                   |         |                          | 9250-9550 (5Tx)      | —    | —    | -45  | —    | —    | -45  |               |
|                   |         |                          | 10260-10710 (6Tx)    | —    | —    | -45  | —    | —    | -45  |               |
|                   |         |                          | 11100-11460 (6Tx)    | —    | —    | -45  | —    | —    | -45  |               |
| 11970-12495 (7Tx) | —       | —                        | -45                  | —    | —    | -45  |      |      |      |               |

Electrical Characteristics are measured with recommended circuit and RF ports terminated in 50 Ω.


**GSM Rx2 (DCS/PCS)**

(V<sub>DD</sub> = 2.9 V, SPI\_V<sub>DD</sub> = 1.8 V, T<sub>a</sub> = -30 to +85 °C, Pin = 0 dBm)

| Item           | State   | Condition | Frequency [MHz] | ANT1 |      |      | ANT2 |      |      | Unit |
|----------------|---------|-----------|-----------------|------|------|------|------|------|------|------|
|                |         |           |                 | Min. | Typ. | Max. | Min. | Typ. | Max. |      |
| Insertion loss | ANT-Rx2 | DCS       | 1805-1880       | —    | —    | 1.65 | —    | —    | 1.53 | dB   |
|                |         | PCS       | 1930-1990       | —    | —    | 1.73 | —    | —    | 1.60 |      |
| VSWR           | ANT-Rx2 | RF Port   | 1805-1990       | —    | —    | 1.65 | —    | —    | 1.6  | —    |
|                |         | ANT Port  | 1805-1990       | —    | —    | 1.9  | —    | —    | 1.7  |      |

Electrical Characteristics are measured with recommended circuit and RF ports terminated in 50 Ω.


Recommended Circuit

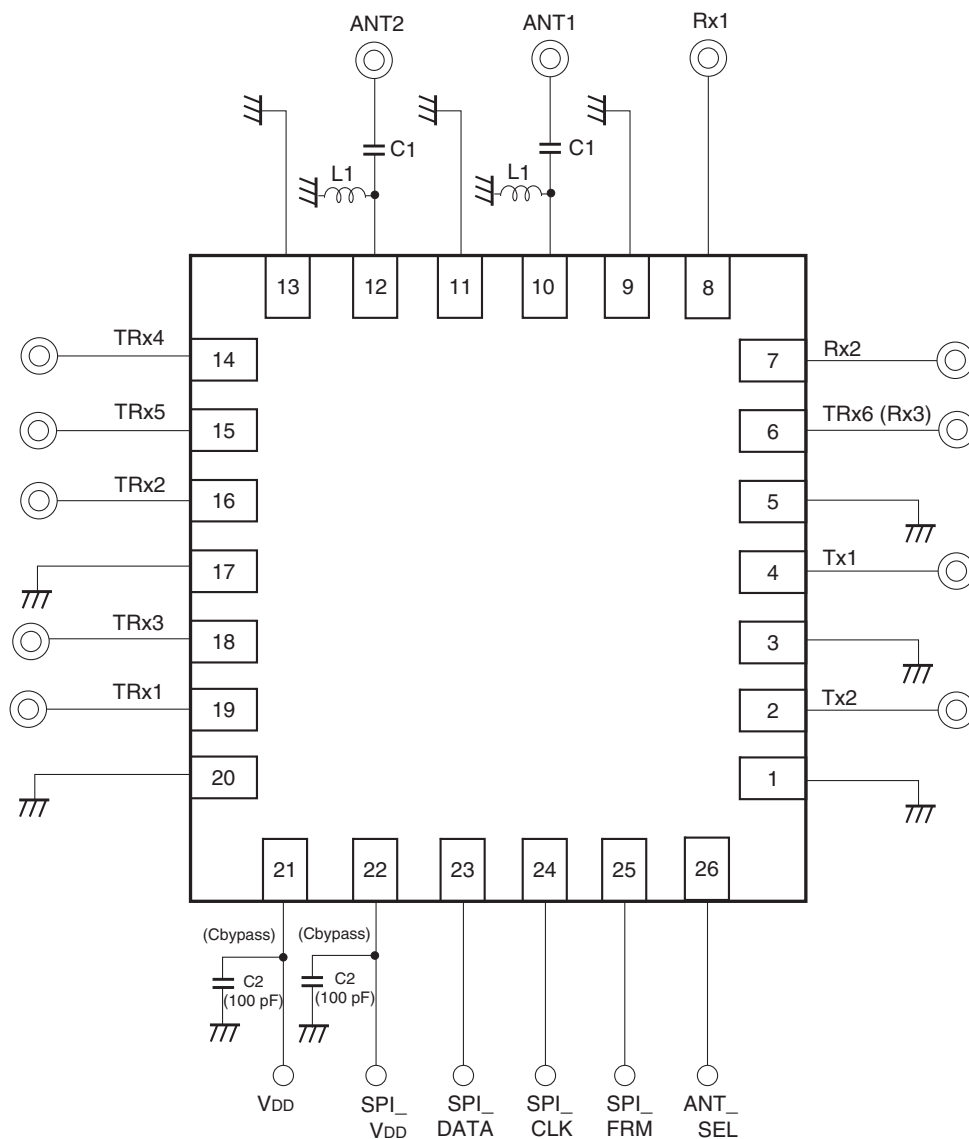


- Note) 1. No DC blocking capacitors are required on all RF ports.  
 2. DC levels of all RF ports are GND.  
 3. L1 inductor (22 nH) and C1 capacitor (8.2 pF) are recommended on Ant port for ESD protection.  
 4. C2 capacitor (100 pF) is recommended.

Recommended Land Pattern

- PKG size: 3.3 mm × 3.1 mm
  - Pin pitch: 0.4 mm
- |  |   |                                       |
|--|---|---------------------------------------|
| <ul style="list-style-type: none"> <li><span style="display: inline-block; width: 15px; height: 10px; background-color: yellow; border: 1px solid black; margin-right: 5px;"></span> : Land</li> <li><span style="display: inline-block; width: 15px; height: 10px; background: repeating-linear-gradient(45deg, transparent, transparent 2px, black 2px, black 4px); border: 1px solid black; margin-right: 5px;"></span> : Mask (Open Area)</li> <li><span style="display: inline-block; width: 15px; height: 10px; border: 1px solid green; margin-right: 5px;"></span> : Resist (Open Area)</li> </ul> | <ul style="list-style-type: none"> <li><span style="display: inline-block; width: 15px; height: 10px; background-color: #ffffcc; border: 1px solid black; margin-right: 5px;"></span> : Metal area in board (*1)</li> <li>*1: GND plane is recommended</li> </ul> | <p>[Metal Mask Thickness: 110 μm]</p> |
|--|---|---------------------------------------|

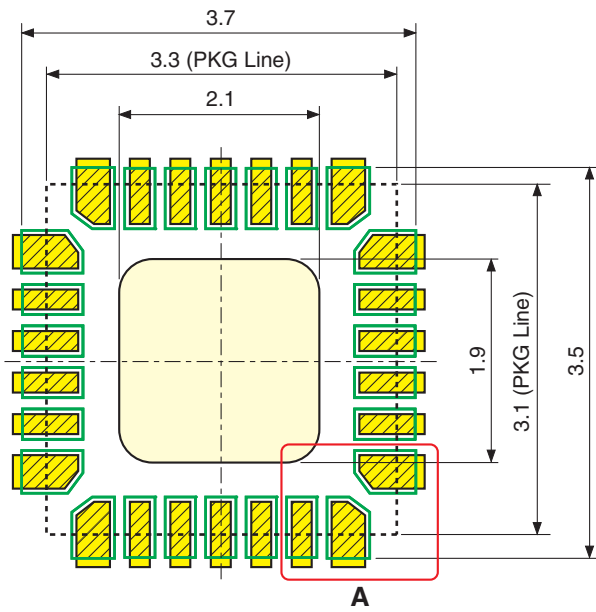


[Detail A]

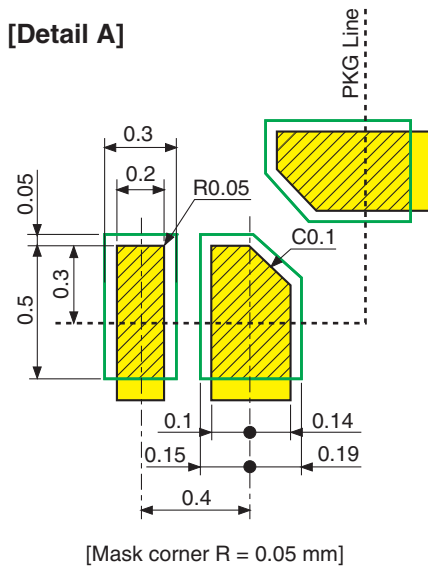

Package Outline

(Unit: mm)  
Product Code: 875341441

26 PIN XQFN (PLASTIC)

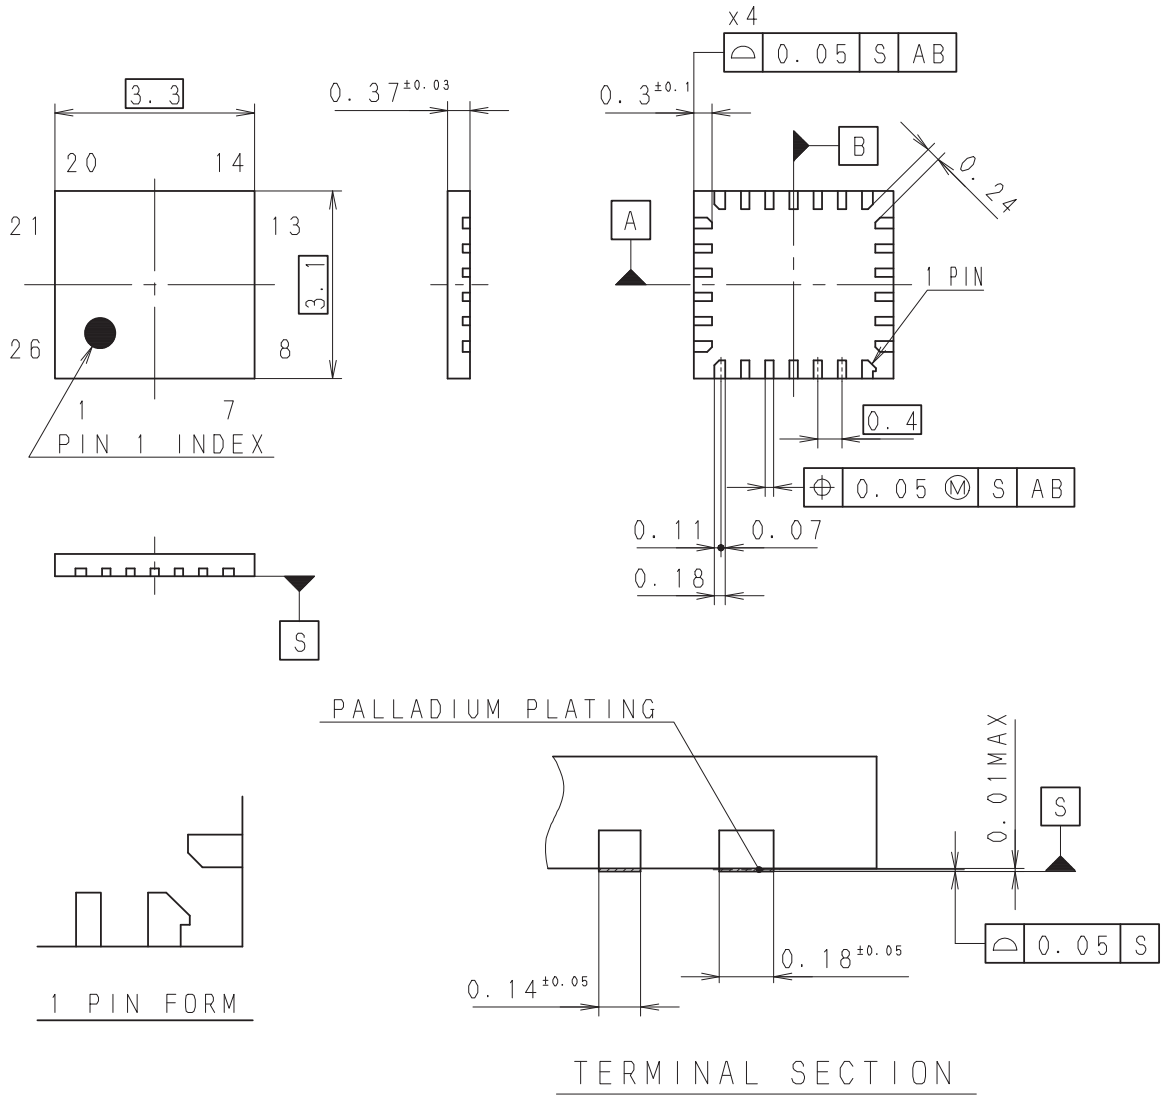

Note: Terminal burr height 0.05mm MAX.

PACKAGE STRUCTURE


|            |              |
|------------|--------------|
| SONY CODE  | XQFN-26P-541 |
| JEITA CODE | _____        |
| JEDEC CODE | _____        |

|                  |                   |
|------------------|-------------------|
| PACKAGE MATERIAL | EPOXY RESIN       |
| LEAD TREATMENT   | PALLADIUM PLATING |
| LEAD MATERIAL    | COPPER ALLOY      |
| PACKAGE MASS     | 0.009g            |

|                 |                                      |         |
|-----------------|--------------------------------------|---------|
| PART No.        | AP-2000-26XNBE1                      | Rev. 0  |
| ISSUED          | 11.12.15                             | REVISED |
| PRODUCTION LINE | COMPILING DIV.<br>SONY SEMICONDUCTOR |         |
| REMARKS         | PKG CODE: XR-26-1BE                  |         |

## Marking

Product Code: 875341441



MARKING C: **3548**

- 注1) C部は製品名 (Max4文字) を配置する。 ( 4文字を超える場合は製品名省略標示規定に従う。 )
- 2) B部, B' 部はロット番号 (Max7文字) を配置する。  
(但し B部は年, 週コードMax3文字, B' 部は組立ロット番号Max4文字とする。)
- 3) 文字位置は, 右詰めとする。

### < INSTRUCTIONS >

- 1) TYPE NO. ( MAX 4 CHARACTERS ) IN SECTION C.  
( FOR MORE THAN 4 CHARACTERS FOLLOW RULES FOR ABBREVIATIONS. )
- 2) LOT NO. ( MAX 7 CHARACTERS ) IN SECTION B, B'.  
( B: YEAR, WEEK CODE MAX 3 CHARACTERS, B' : ASSEMBLY LOT NO. MAX 4 CHARACTERS. )
- 3) PUT THE POSITION OF A CHARACTER REFERENCE FROM THE RIGHT SIDE.




Package Outline

(Unit: mm)

Product Code: 875336797, 875336798, 875340744

26 PIN XQFN (PLASTIC)

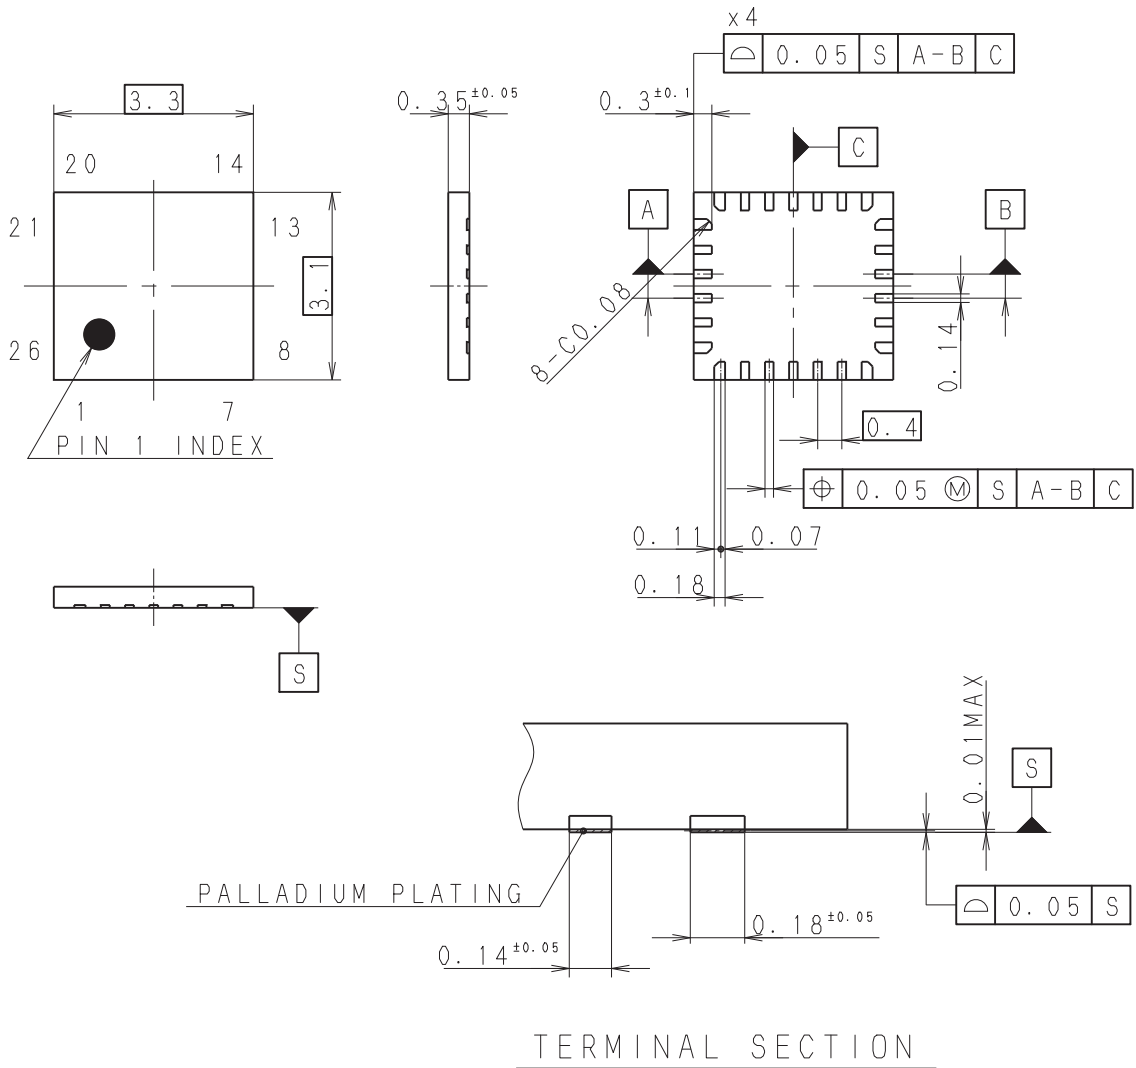

TERMINAL SECTION

Note: Terminal burr height 0.05mm MAX.

PACKAGE STRUCTURE


|            |             |
|------------|-------------|
| SONY CODE  | XQFN-26P-01 |
| JEITA CODE | _____       |
| JEDEC CODE | _____       |

|                  |                    |
|------------------|--------------------|
| PACKAGE MATERIAL | EPOXY RESIN        |
| LEAD TREATMENT   | PALLADIUM PLATING  |
| LEAD MATERIAL    | COPPER ALLOY       |
| PACKAGE MASS     | 0.009 <sub>g</sub> |

|                 |  |                  |
|-----------------|--|------------------|
| PART No.        | AP-4000-26010S                           | Rev. 1           |
| ISSUED          | 10.10.27                                 | REVISED 10.11.04 |
| PRODUCTION LINE | COMPILING DIV. SONY SEMICONDUCTOR KYUSHU |                  |
| REMARKS         | PKG CODE: XR-026-M                       |                  |

## Marking

Product Code: 875336797, 875336798, 875340744



MARKING C: 3548

- 注1) C部は製品名 (Max4文字) を配置する。 ( 4文字を超える場合は製品名省略標示規定に従う。 )
- 2) B部, B' 部はロット番号 (Max7文字) を配置する。  
(但し B部は年, 週コードMax3文字, B' 部は組立ロット番号Max4文字とする。)
- 3) 文字位置は, 右詰めとする。
- 4) マーク深さは, MAX0.05mmの事。

### < INSTRUCTIONS >

- 1) TYPE NO. ( MAX 4 CHARACTERS ) IN SECTION C.  
( FOR MORE THAN 4 CHARACTERS FOLLOW RULES FOR ABBREVIATIONS. )
- 2) LOT NO. ( MAX 7 CHARACTERS ) IN SECTION B, B' .  
( B: YEAR, WEEK CODE MAX 3 CHARACTERS, B' : ASSEMBLY LOT NO. MAX 4 CHARACTERS. )
- 3) PUT THE POSITION OF A CHARACTER REFERENCE FROM THE RIGHT SIDE.
- 4) MARK DEPTH MAX 0.05 mm.