

# 8NDL64

## ND WOOFER



**700 W**  
continuous program  
power capacity

**64 mm (2.5 in)**  
copper voice coil

Neodymium inside slug  
magnet assembly

Shorting copper cap for  
extended HF response


**97 dB**  
sensitivity

**80 - 4000 Hz**  
response

Ventilated voice  
coil gap for reduced  
power compression



### SENSITIVITY

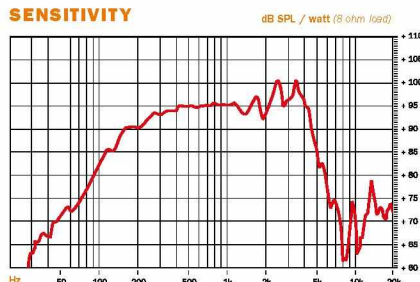

### IMPEDANCE



### SPECIFICATIONS

Nominal Diameter	200 mm (8 in)
Nominal Impedance	8 Ω
Minimum Impedance	7.2 Ω
Power Handling	
Nominal (AES) <sup>1</sup>	350 W
Continuous Program <sup>2</sup>	700 W
Sensitivity (1W/1m) <sup>3</sup>	97 dB
Frequency Range	80 - 4000 Hz
Voice Coil Diameter	64 mm (2.5 in)
Winding Material	Copper
Former Material	Glass Fibre
Winding Depth	14 mm (0.55 in)
Magnetic Gap Depth	8 mm (0.31 in)
Flux Density	1.25 T
Magnet Material	Neodymium Inside Slug
Waterproof Cone Treatment	Front Side

### THIELE & SMALL PARAMETERS<sup>4</sup>

Fs	80 Hz
Re	5.4 Ω
Qes	0.25
Qms	10.91
Qts	0.25
Vas	9.6 dm <sup>3</sup> (0.34 ft <sup>3</sup> )
Sd	220 cm <sup>2</sup> (34.1 in <sup>2</sup> )
η <sub>0</sub>	1.88 %
X max	± 4.5 mm
X var	± 5.0 mm
Mms	28 g
Bl	17.5 T·m
Le	0.62 mH
EBP	320 Hz

### MOUNTING AND SHIPPING INFORMATION

Overall Diameter	225 mm (8.8 in)
Bolt Circle Diameter	210 mm (8.3 in)
Baffle Cutout Diameter	187 mm (7.4 in)
Depth	95 mm (3.74 in)
Flange and Gasket Thickness	10 mm (0.39 in)
Air volume occupied by driver	1.5 dm <sup>3</sup> (0.05 ft <sup>3</sup> )
Net Weight	2.8 kg (6.17 lb)
Shipping Weight	3.25 kg (7.17 lb)
Shipping Box	255x255x150 mm (10.04x10.04x5.90 in)
Service kit	RCK008NDL64-8

<sup>1</sup> Two hour test made with continuous pink noise signal (6 dB crest factor) within the specified range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.

<sup>2</sup> Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

<sup>3</sup> Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.

<sup>4</sup> Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Also available in 16 Ω, data upon request