

GREEN LABEL

GREEN LABEL SPEAKERS ARE PRIMED FOR HIGH-POWER ROCK PERFORMANCES, WHERE A FULL-BODIED, WARM, DEFINED TONE IS ESSENTIAL.




BL12-200X

BASS GUITAR LOUDSPEAKER



Frequency Response and Impedance Curves

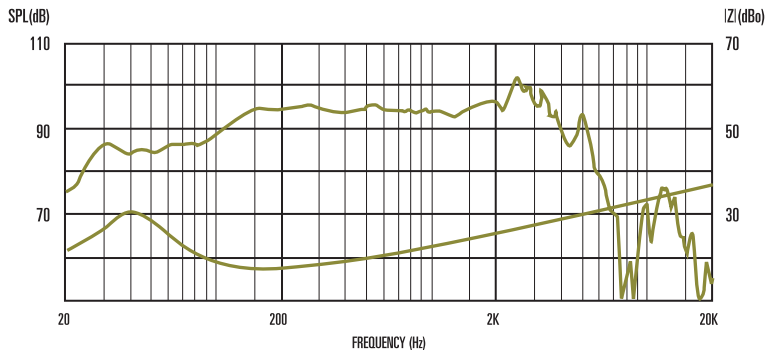

General Parameters

Nominal diameter	304.8mm/12in
Power Rating (rms)	200W
Nominal impedance	8Ω
Voice coil diameter	50.8mm/2in
Magnet type	Ferrite
Sensitivity	94dB
Frequency range	45-3500Hz
Coil material	Copper
Former material	Polyimide
Cone material	Kevlar loaded paper
Surround material	Cloth-sealed
Xmax	4mm/0.15in
Gap depth	8mm/0.31in
Voice coil winding width	16mm/0.62in

Small Signal Parameters

D	0.26m/10.24in
Fs	45Hz
Mmd	40.57g/1.43oz
Mair	6.92g/0.244oz
Qms	2.74
Qes	0.49
Qts	0.42
Re	5.88Ω
Vas	104.64lt/3.7ft ³
Bl	12.71Tm
Cms	0.26mm/N
Rms	4.92kg/s
Le	1.0mH

Mounting Information

Diameter	309mm/12.2in
Overall depth	130mm/5.1in
Cut-out diameter	283mm/11.1in
Mounting slot dimensions	Ø7.9mm/0.31in
Number of mounting slots	4
Mounting slot PCD	297mm/11.7in
Unit weight	3.2kg/7lb

Unit conditioned prior to measurement.