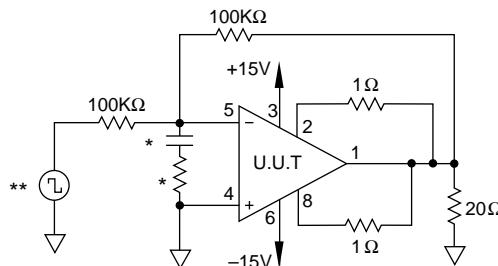


**TABLE 4 GROUP A INSPECTION**
**PA73M**

HTTP://WWW.APEXMICROTECH.COM (800) 546-APEX (800) 546-2739

SG	PARAMETER	SYMBOL	TEMP.	POWER	TEST CONDITIONS	MIN	MAX	UNITS
1	Quiescent Current	$I_Q$	25°C	$\pm 28V$	$V_{IN} = 0, A_V = 100$		5	mA
1	Input Offset Voltage	$V_{OS}$	25°C	$\pm 28V$	$V_{IN} = 0, A_V = 100$		$\pm 10$	mV
1	Input Offset Voltage	$V_{OS}$	25°C	$\pm 10V$	$V_{IN} = 0, A_V = 100$		$\pm 17.2$	mV
1	Input Offset Voltage	$V_{OS}$	25°C	$\pm 30V$	$V_{IN} = 0, A_V = 100$		$\pm 10.8$	mV
1	Input Bias Current, +IN	$+I_B$	25°C	$\pm 28V$	$V_{IN} = 0$		$\pm 40$	nA
1	Input Bias Current, -IN	$-I_B$	25°C	$\pm 28V$	$V_{IN} = 0$		$\pm 40$	nA
1	Input Offset Current	$I_{OS}$	25°C	$\pm 28V$	$V_{IN} = 0$		$\pm 10$	nA
3	Quiescent Current	$I_Q$	-55°C	$\pm 28V$	$V_{IN} = 0, A_V = 100$		5	mA
3	Input Offset Voltage	$V_{OS}$	-55°C	$\pm 28V$	$V_{IN} = 0, A_V = 100$		$\pm 15.2$	mV
3	Input Offset Voltage	$V_{OS}$	-55°C	$\pm 10V$	$V_{IN} = 0, A_V = 100$		$\pm 22.4$	mV
3	Input Offset Voltage	$V_{OS}$	-55°C	$\pm 30V$	$V_{IN} = 0, A_V = 100$		$\pm 16$	mV
3	Input Bias Current, +IN	$+I_B$	-55°C	$\pm 28V$	$V_{IN} = 0$		$\pm 72$	nA
3	Input Bias Current, -IN	$-I_B$	-55°C	$\pm 28V$	$V_{IN} = 0$		$\pm 72$	nA
3	Input Offset Current	$I_{OS}$	-55°C	$\pm 28V$	$V_{IN} = 0$		$\pm 26$	nA
2	Quiescent Current	$I_Q$	125°C	$\pm 28V$	$V_{IN} = 0, A_V = 100$		7	mA
2	Input Offset Voltage	$V_{OS}$	125°C	$\pm 28V$	$V_{IN} = 0, A_V = 100$		$\pm 16.5$	mV
2	Input Offset Voltage	$V_{OS}$	125°C	$\pm 10V$	$V_{IN} = 0, A_V = 100$		$\pm 23.7$	mV
2	Input Offset Voltage	$V_{OS}$	125°C	$\pm 30V$	$V_{IN} = 0, A_V = 100$		$\pm 17.3$	mV
2	Input Bias Current, +IN	$+I_B$	125°C	$\pm 28V$	$V_{IN} = 0$		$\pm 80$	nA
2	Input Bias Current, -IN	$-I_B$	125°C	$\pm 28V$	$V_{IN} = 0$		$\pm 80$	nA
2	Input Offset Current	$I_{OS}$	125°C	$\pm 28V$	$V_{IN} = 0$		$\pm 30$	nA
4	Output Voltage, $I_o = 5A$	$V_o$	25°C	$\pm 18.3V$	$R_L = 2.07\Omega$	10.3		V
4	Output Voltage, $I_o = 50mA$	$V_o$	25°C	$\pm 30V$	$R_L = 500\Omega$	25		V
4	Output Voltage, $I_o = 2A$	$V_o$	25°C	$\pm 30V$	$R_L = 12\Omega$	24		V
4	Current Limits	$I_{CL}$	25°C	$\pm 18V$	$R_L = 12\Omega, R_{CL} = 1\Omega$	.54	.86	A
4	Stability/Noise	$E_N$	25°C	$\pm 28V$	$R_L = 500\Omega, A_V = 1, C_L = 10nF$		1	mV
4	Slew Rate	SR	25°C	$\pm 28V$	$R_L = 500\Omega$	1	10	V/ $\mu$ s
4	Open Loop Gain	$A_{OL}$	25°C	$\pm 28V$	$R_L = 500\Omega, F = 10Hz$	91		dB
4	Common Mode Rejection	CMR	25°C	$\pm 15V$	$R_L = 500\Omega, F = DC, V_{CM} = \pm 9V$	70		dB
6	Output Voltage, $I_o = 5A$	$V_o$	-55°C	$\pm 18.3V$	$R_L = 2.07\Omega$	10.3		V
6	Output Voltage, $I_o = 50mA$	$V_o$	-55°C	$\pm 30V$	$R_L = 500\Omega$	25		V
6	Output Voltage, $I_o = 2A$	$V_o$	-55°C	$\pm 30V$	$R_L = 12\Omega$	24		V
6	Stability/Noise	$E_N$	-55°C	$\pm 30V$	$R_L = 500\Omega, A_V = 1, C_L = 10nF$		1	mV
6	Slew Rate	SR	-55°C	$\pm 28V$	$R_L = 500\Omega$	1	10	V/ $\mu$ s
6	Open Loop Gain	$A_{OL}$	-55°C	$\pm 28V$	$R_L = 500\Omega, F = 10Hz$	91		dB
6	Common Mode Rejection	CMR	-55°C	$\pm 15V$	$R_L = 500\Omega, F = DC, V_{CM} = \pm 9V$	70		dB
5	Output Voltage, $I_o = 3A$	$V_o$	125°C	$\pm 11.3V$	$R_L = 2.07\Omega$	6.3		V
5	Output Voltage, $I_o = 50mA$	$V_o$	125°C	$\pm 30V$	$R_L = 500\Omega$	25		V
5	Output Voltage, $I_o = 2A$	$V_o$	125°C	$\pm 30V$	$R_L = 12\Omega$	24		V
5	Stability/Noise	$E_N$	125°C	$\pm 28V$	$R_L = 500\Omega, A_V = 1, C_L = 10nF$		1	mV
5	Slew Rate	SR	125°C	$\pm 28V$	$R_L = 500\Omega$	1	10	V/ $\mu$ s
5	Open Loop Gain	$A_{OL}$	125°C	$\pm 28V$	$R_L = 500\Omega, F = 10Hz$	91		dB
5	Common Mode Rejection	CMR	125°C	$\pm 15V$	$R_L = 500\Omega, F = DC, V_{CM} = \pm 9V$	70		dB

**BURN IN CIRCUIT**


\* These components are used to stabilize device due to poor high frequency characteristics of burn in board.

\*\* Input signals are calculated to result in internal power dissipation of approximately 2.1W at case temperature = 125°C.