


### Specifications

<b>Diameter:</b>	<b>25mm</b>
<b>Sensitivity:</b>	<b>90 dB</b>
<b>Power Handling:</b>	<b>8 WRMS (80W Pk)</b>
<b>Frequency Response:</b>	<b>1,500 ~ 20,000 Hz</b>
<b>Nominal Impedance:</b>	<b>4 Ohms</b>
<b>Voice Coil Diameter:</b>	<b>1.0" (25mm)</b>
<b>Peak Xmax:</b>	<b>N/A</b>
<b>Magnet Weight:</b>	<b>Neodymium</b>
<b>Surround</b>	<b>N/A</b>
<b>Frame</b>	<b>Molded</b>
<b>Dome</b>	<b>Silk</b>

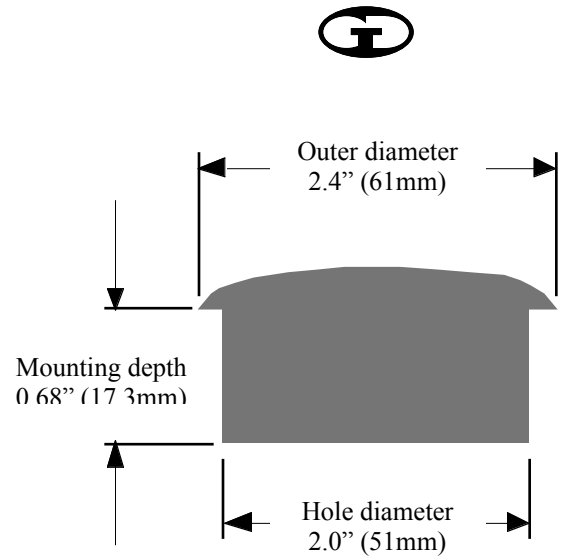

### Parameters

<b>Free Air Resonance:</b>	<b>1,500 Hz</b>
<b>Voice Coil DC Resistance:</b>	<b>4.4 ohms</b>
<b>Voice Coil Inductance @ 1 kHz:</b>	<b>0.01 mH</b>
<b>Mechanical Q (<math>Q_{ms}</math>):</b>	<b>N/A</b>
<b>Electrical Q (<math>Q_{es}</math>):</b>	<b>N/A</b>
<b>Total Q (<math>Q_{ts}</math>):</b>	<b>N/A</b>
<b>Compliance Volume (<math>V_{as}</math>):</b>	<b>N/A</b>

