


## MINIDIP 1.2W AUDIO AMPLIFIER

The TBA820M is a monolithic integrated audio amplifier in a 8 lead dual in-line plastic package. It is intended for use as low frequency class B power amplifier with wide range of supply voltage: 3 to 16V, in portable radios, cassette recorders and players etc. Main features are: minimum working supply voltage of 3V, low quiescent current, low number of external components, good ripple rejection, no cross-over distortion, low power dissipation.

Output power:  $P_o = 2W$  at  $12V/8\Omega$ ,  $1.6W$  at  $9V/4\Omega$  and  $1.2W$  at  $9V/8\Omega$ .



Minidip Plastic


ORDERING NUMBER: TBA820M

### ABSOLUTE MAXIMUM RATINGS

$V_s$	Supply voltage	16	V
$I_o$	Output peak current	1.5	A
$P_{tot}$	Power dissipation at $T_{amb} = 50^\circ C$	1	W
$T_{stg}, T_j$	Storage and junction temperature	-40 to 150	°C


### TEST AND APPLICATION CIRCUITS

Fig. 1 - Circuit diagram with load connected to the supply voltage

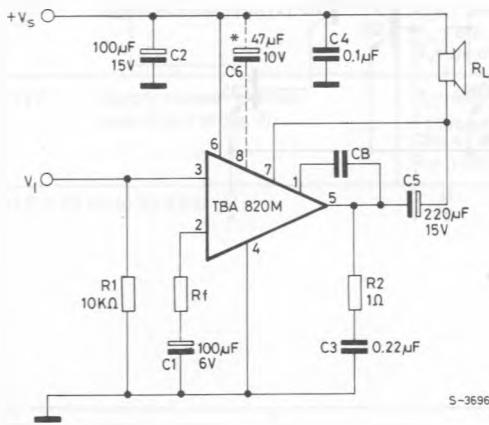

S-3696/2


Fig. 2 - Circuit diagram with load connected to ground

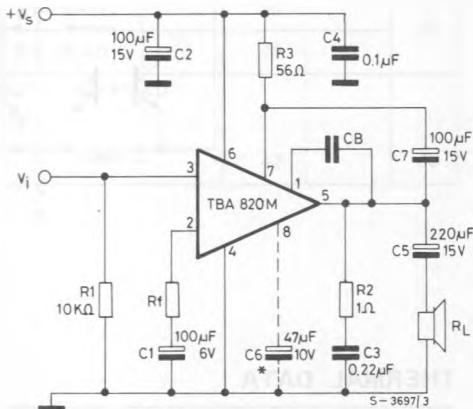


\* Capacitor C6 must be used when high ripple rejection is required.

## CONNECTION DIAGRAM

(top view)

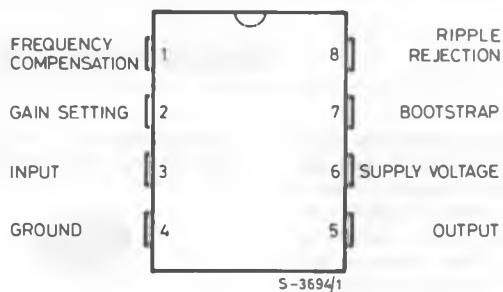

## SCHEMATIC DIAGRAM

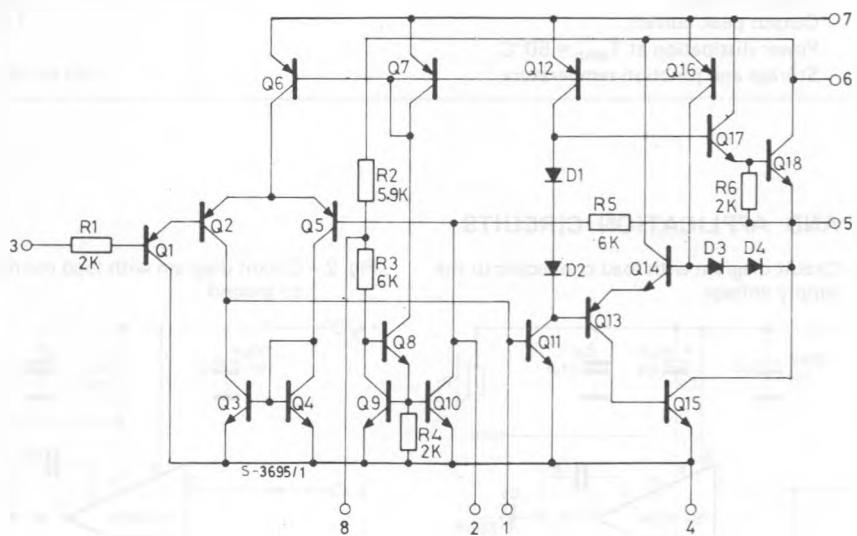

## THERMAL DATA

$R_{th \text{ j-amb}}$	Thermal resistance junction-ambient	max	100	$^{\circ}\text{C/W}$
------------------------	-------------------------------------	-----	-----	----------------------

**ELECTRICAL CHARACTERISTICS** (Refer to the test circuits  $V_s = 9V$ ,  $T_{amb} = 25^\circ C$  unless otherwise specified)

Parameter	Test conditions		Min.	Typ.	Max.	Unit
$V_s$ Supply voltage			3		16	V
$V_o$ Quiescent output voltage (pin 5)			4	4.5	5	V
$I_d$ Quiescent drain current				4	12	mA
$I_b$ Bias current (pin 3)				0.1		$\mu A$
$P_o$ Output power	$d = 10\%$ $R_f = 120\Omega$ $V_s = 12V$ $V_s = 9V$ $V_s = 9V$ $V_s = 6V$ $V_s = 3.5V$	$f = 1 \text{ kHz}$ $R_L = 8\Omega$ $R_L = 4\Omega$ $R_L = 8\Omega$ $R_L = 4\Omega$ $R_L = 4\Omega$		2 1.6 1.2 0.75 0.25		W W W W W
$R_i$ Input resistance (pin 3)	$f = 1 \text{ kHz}$			5		$M\Omega$
B Frequency response (-3 dB)	$R_L = 8\Omega$ $C_S = 1000 \mu F$ $R_f = 120\Omega$	$C_B = 680 \mu F$ $C_B = 220 \mu F$		25 to 7,000 25 to 20,000		Hz
d Distortion	$P_o = 500 \text{ mW}$ $R_L = 8\Omega$ $f = 1 \text{ kHz}$	$R_f = 33\Omega$ $R_f = 120\Omega$		0.8 0.4		%
$G_v$ Voltage gain (open loop)	$f = 1 \text{ kHz}$	$R_L = 8\Omega$		75		dB
$G_v$ Voltage gain (closed loop)	$R_L = 8\Omega$ $f = 1 \text{ kHz}$	$R_f = 33\Omega$ $R_f = 120\Omega$		45 34		dB
$e_N$ Input noise voltage (*)				3		$\mu V$
$i_N$ Input noise current (*)				0.4		nA
$\frac{S+N}{N}$	Signal to noise ratio (*)	$P_o = 1.2W$ $R_L = 8\Omega$ $G_v = 34 \text{ dB}$	$R1 = 10K\Omega$ $R1 = 50 k\Omega$	80 70		dB
SVR	Supply voltage rejection (test circuit of fig. 2)	$R_L = 8\Omega$ $f (\text{ripple}) = 100 \text{ Hz}$ $C6 = 47 \mu F$ $R_f = 120\Omega$			42	dB

(\*) B = 22 Hz to 22 KHz

Fig. 3 - Output power vs. supply voltage




Fig. 4 - Harmonic distortion vs. output power




Fig. 5 - Power dissipation and efficiency vs. output power




Fig. 6 - Maximum power dissipation (sine wave operation)




Fig. 7 - Suggested value of  $C_B$  vs.  $R_f$




Fig. 8 - Frequency response




Fig. 9 - Harmonic distortion vs. frequency




Fig. 10 - Supply voltage rejection (Fig. 2 circuit)




Fig. 11 - Quiescent current vs. supply voltage

