

PROXIMITY DETECTORS

- OUTPUT CURRENT : 10 mA
- OSCILLATOR FREQUENCY : 10 MHz
- SUPPLY VOLTAGE : + 4 TO + 35 V

DESCRIPTION

These monolithic integrated circuits are designed for metallic body detection by detecting the variations in high frequency Eddy current losses. With an external tuned circuit they act as oscillators. Output signal level is altered by an approaching metallic object.

Output signal is determined by supply current changes. Independent of supply voltage, this current is high or low according to the presence or the absence of a close metallic object.


MINIDIP/2



SO-8J



TO-99




ORDER CODES : TDA0161DP (Minidip)

TDA0161FP (SO-8J)


TDA0161CM (TO-99)

PIN CONNECTIONS (top views)

MINIDIP/SO-8

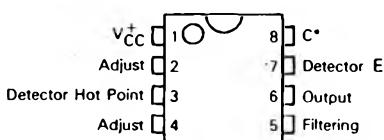

TO-99




Pin 4 connected to case

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CC}	Supply Voltage	35	V
T_j	Junction Temperature DP, FP Suffix CM Suffix	+ 150 + 175	°C
T_{stg}	Storage Temperature Range	- 55 to + 150	°C

SCHEMATIC DIAGRAM

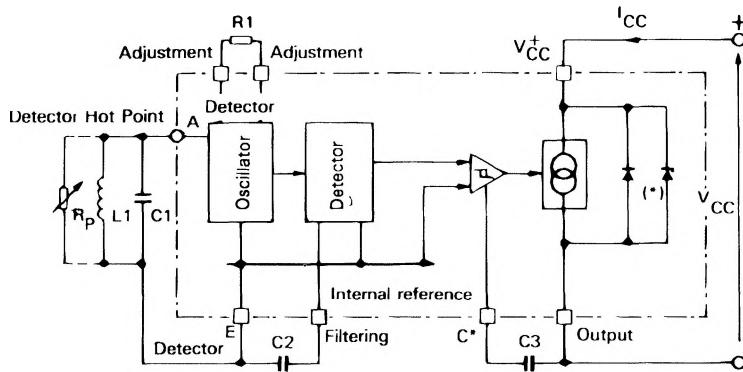

ELECTRICAL CHARACTERISTICS

TDA0161DP : - 40 °C < Tamb < + 100 °C

TDA0161FP : - 40 °C < Tamb < + 100 °C

TDA0161CM : - 40 °C < Tamb < + 140 °C

P_{tot} < 150 mW

(unless otherwise specified)

Symbol	Parameter		Min.	Typ.	Max.	Unit
V _{CC}	Supply Voltage	TDA0161	4	-	35	V
-	Reverse Voltage Limitation ($I_{CC} = - 100 \text{ mA}$)		-	- 1	-	V
I_{CC}	Supply Current, Close Target ($T_{amb} = + 25 \text{ }^{\circ}\text{C}$) + 4 V < V _{CC} < + 35 V	TDA 0161	8	10	12	mA
I_{CC}	Supply Current, Remote Target + 4 V < V _{CC} < + 35 V	TDA 0161	-	-	1	mA
-	Supply Current Transition Time $C_3 = 0$ $C_3 \neq 0$		-	1	[100 x $C_3(\text{nF})$]	μs
f_{osc}	Oscillator Tuning Frequency		-	-	10	MHz
f_O	Output Frequency ($C_3 = 0$)		0	-	10	kHz
ΔI_{CC}	Output Current Ripple - $C_3 = 0$, $C_2 (\text{pF}) > 150/f_{osc} (\text{MHz})$		-	-	20	μA
R_n	Negative Resistance on Terminals A and E ($4 \text{ k}\Omega < R_1 < 50 \text{k}\Omega$, $f_{osc} < 3 \text{ MHz}$)		0.9 R ₁	R ₁	1.1 R ₁	-
H_{yst}	Hysteresis at Detection Point C ₂ ($P_f > 150/f_{osc} (\text{MHz})$)		0.5	-	5	%

* If the circuit is used at a frequency higher than 3 MHz, it is recommended to connect a capacitor of 100 pF between terminals E and D.


OPERATING MODE

Between terminals A and E, the integrated circuit acts like a negative resistance equal to the external resistor R1 connected between terminals B and H. The supply current will be $I_{CC} = 1 \text{ mA}$ (pins G and D).


The oscillation stops when loss resistance Rp of tuned circuit becomes smaller than R1. Then, the supply current will be $I_{CC} = 10 \text{ mA}$ (pins G and D).

The oscillation sustains when loss resistance Rp of tuned circuit becomes higher than R1. Then, the supply current will be $I_{CC} = 1 \text{ mA}$ (pins G and D).

Eddy currents induced by coil L1 in a metallic body, determine loss resistance Rp.

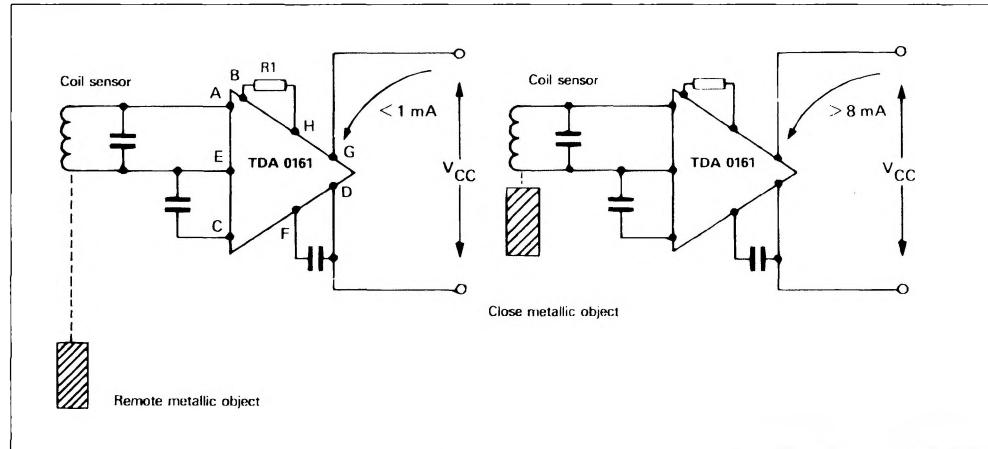

TYPICAL APPLICATIONS

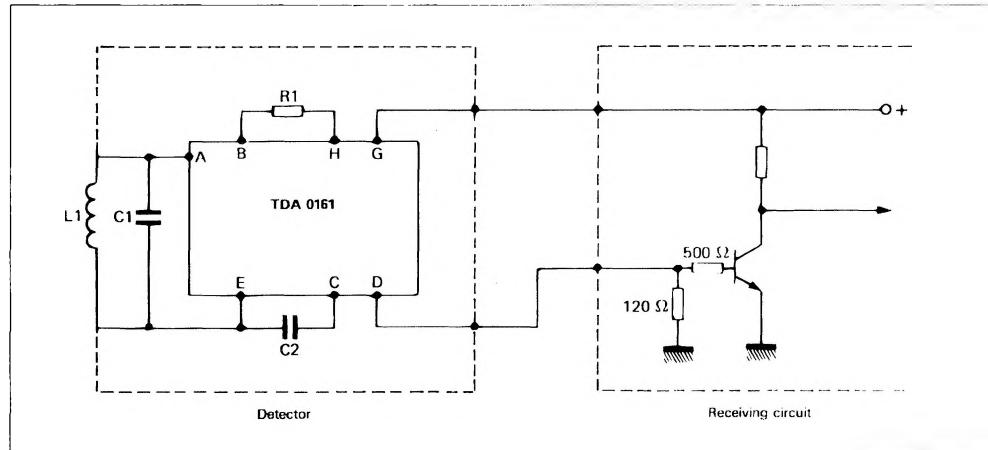

Detection Range (*)	L1 (μ H)	C1 (pF)	f _{osc} (kHz)	R1 (k Ω)	C2 pF
2 mm	30 (1)	120	2650	6.8	47
5 mm	300 (2)	470	425	27	470
10 mm	2160 (3)	4700	50	27	3300

(*) Ingot steel target.

COIL CHARACTERISTICS

	Core	Coil Former	Wire**	Number of Turns
1	Cofelec 432 FP 9 x 5 SE	1/2 CAR 091 - 2	THOMSON Fils et Câbles Thomrex 14 (14/100 mm)	40
2	Cofelec 432 FP 14 x 8 SE	1/2 CAR 142 - 2	THOMSON Fils et Câbles Thomrex 14 (14/100 mm)	100
3	Cofelec 432 FP 26 x 16 SE	1/2 CAR 262 - 2	THOMSON Fils et Câbles Thomrex 14 (14/100 mm)	200

** The above results are obtained with single wire coil. When using Litz wire instead of single wire, the parallel resistance of the coil becomes higher and the value of R1 may be increased, resulting in better sensitivity.