
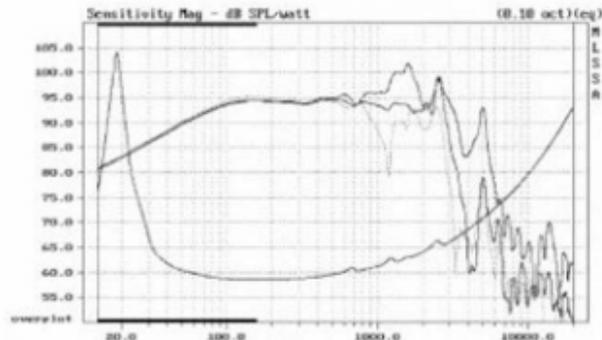


La technologie papier associée au châssis moulé ultra-rigide permettent d'obtenir une reproduction très puissantes de graves d'une grande douceur.

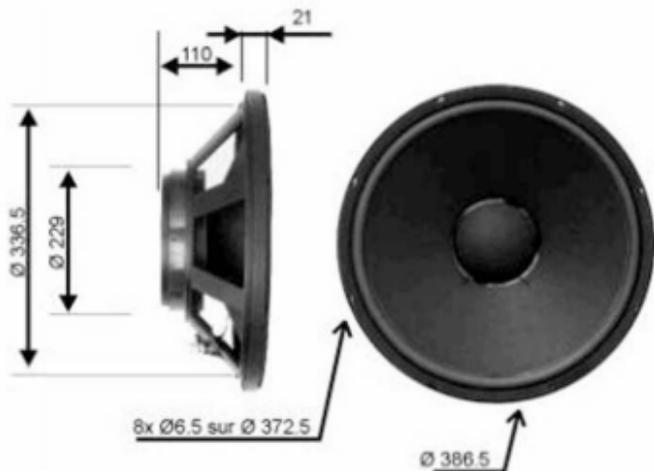


Impédance ..... 8 ohms  
Résonance ..... 23.8 Hz  
Puissance nominale (IEC) 350 W  
Sensibilité (2.83V/1m) ... 100.0 dB

Résistance (DC) ..... 5.8 ohms  
Inductance ..... 0.75 mH  
Xmax ..... ± 5.5 mm  
Qms ..... 1.39  
Qes ..... 0.17  
Qts ..... 0.15  
Vas ..... 376 l

Diamètre bobine..... 100 mm  
Hauteur bobine ..... 18 mm  
Support ..... kapton  
Nb. couches ..... 1  
Type de fil ..... plat  
Champ ..... 25.8 NA  
Masse mobile..... 136.0 gr


Membrane..... papier  
Suspension ..... mousse  
Saladier..... zamack  
Poids ..... 10.0 kg

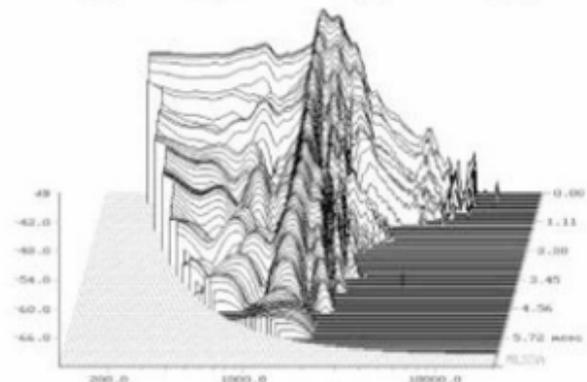

**15" - PAPER CONE DRIVER - 380 mm****PROFESSIONAL LINE**


Very high efficiency - 100 dB  
 Very high power - 350 W  
 Foam suspension  
 Ultra stiff die cast chassis  
 Heat sink design - Vented pole piece  
 Kapton voice coil former (100 mm Ø)  
 Flat copper wire  
 Gold plated binding posts

Très haut rendement - 100 dB  
 Puissance très élevée - 350 W  
 Suspension mousse  
 Châssis moulé ultra-rigide  
 Ailettes de refroidissement - Noyau ventilé  
 Bobine sur support Kapton (Ø 100 mm)  
 Fil cuivre plat sur chant  
 Bornes plaquées or

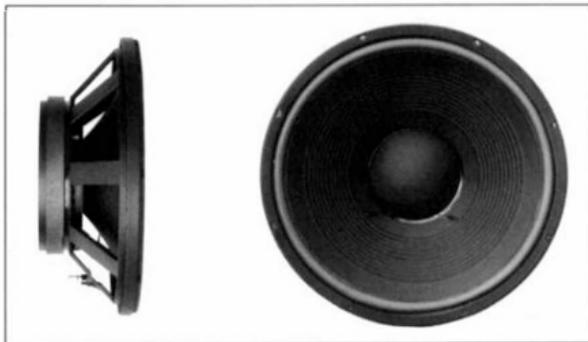


This 15" woofer is designed to work in a C4 alignment vented system to reinforce deep bass down to 40 Hz, with low distortion at high power levels. The very high sensitivity (100 dB) and exceptional power handling (350 W) result from the very large diameter magnet (9") coupled with a 4" edgewound flat copper wire voice coil mounted onto a fiberglass reinforced Kapton former. The magnet has a vented pole piece and is heatsinked to the Zamak chassis to maximize heat dissipation. Gold plated binding posts fitted onto the Ultra stiff die cast chassis are designed to accept large diameter cables. The "suggested applications" charts indicate various driver loads. The response curves shown on the diagram indicate the predicted low end response of the driver in the suggested box volume (Vb) with suggested port (Dp-Lp).

Ce woofer de 380 mm à grandes elongations est particulièrement destiné à la reproduction du grave à fort niveau sans distorsion en enceinte bass reflex. Son très haut rendement (100 dB) et sa très forte tenue en puissance (350 W) résultent de l'utilisation d'une large structure magnétique (225 mm) associée à une bobine de 100 mm sur support Kapton renforcé fibre de verre à fil de cuivre plat sur chant. La dissipation de la chaleur est optimisée par les ailettes de refroidissement du châssis moulé Zamak et le noyau ventilé. La réponse dans le grave s'étend jusqu'à 40 Hz avec un alignement C4. Les borniers plaqués or permettent l'utilisation de câble de forte section. Le tableau "Suggested applications" indique différents types de charge. Les courbes publiées correspondent à la réponse dans le grave pour un volume (Vb) et une dimension d'évent donnée (Dp-Lp).

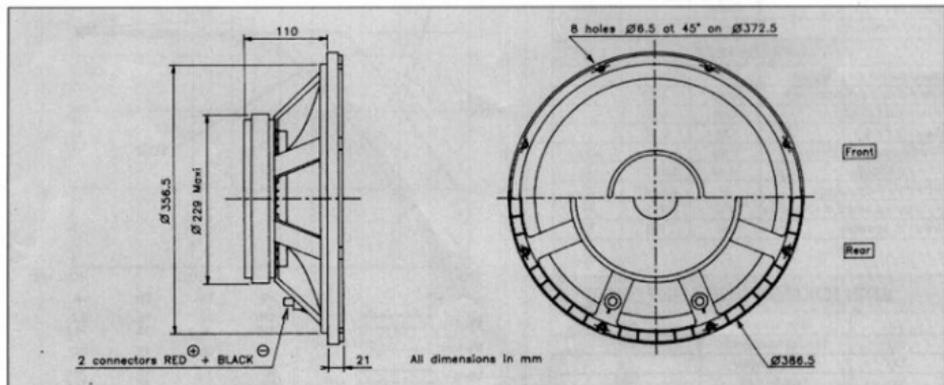

**RESPONSE CURVE**

refer to page 16

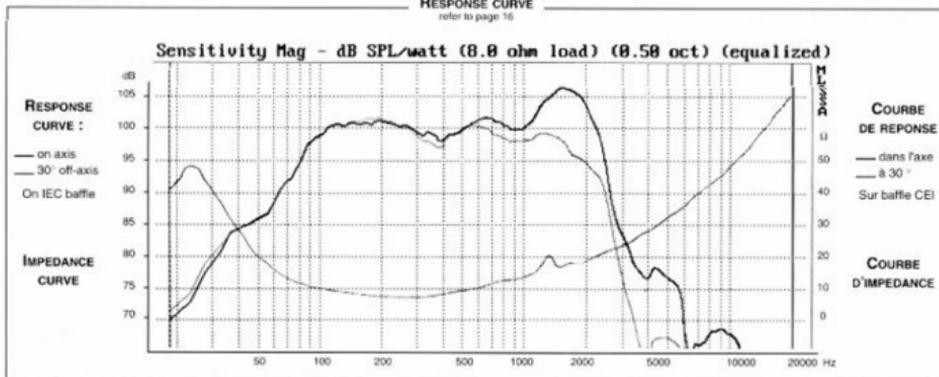

## SPECIFICATIONS

Technical Characteristics	Symbol	Value	Units
---------------------------	--------	-------	-------

### PRIMARY APPLICATION

Nominal Impedance	Z	8	$\Omega$
Resonance Frequency	Fs	23.8	Hz
Nominal Power Handling	P	350	W
Sensitivity	E	100	dB

### VOICE COIL

Voice coil diameter	$\varnothing$	100	mm
Minimum Impedance	Zmin	7,6	$\Omega$
DC Resistance	Re	5,8	$\Omega$
Voice Coil Inductance	Lbm	0,75	mH
Voice coil Length	h	1,8	mm
Former	-	Kapton	-
Number of layers	n	1	-

### MAGNET

Magnet dimensions	$\varnothing \times h$	224 x 23	mm
Magnet weight	m	3,43	kg
Flux density	B	1,2	T
Force factor	BL	25,8	NA
Height of magnetic gap	He	7	mm
Stray flux	Fmag	-	Am
Linear excursion	Xmax	$\pm 5,5$	mm

### PARAMETERS


Suspension Compliance	Cms	$0,33 \cdot 10^{-3}$	mN <sup>-1</sup>
Mechanical Q Factor	Qms	1,39	-
Electrical Q Factor	Qes	0,17	-
Total Q Factor	Qts	0,15	-
Mechanical Resistance	Rms	14,6	kg s <sup>-1</sup>
Moving Mass	Mms	$136 \cdot 10^{-3}$	kg
Effective Piston Area	S	$9,0 \cdot 10^{-2}$	m <sup>2</sup>
Volume Equivalent of Air at Cas	Vas	$376 \cdot 10^{-3}$	m <sup>3</sup>
Mass of speaker	M	10	kg

## APPLICATION PARAMETERS


Vb	Box volume	dm <sup>3</sup>
Fb	Tuning frequency	Hz
Dp	Port diameter	cm
Lp	Port length	cm

**IMPULSE RESPONSE**
**WATERFALL**

refer to page 16

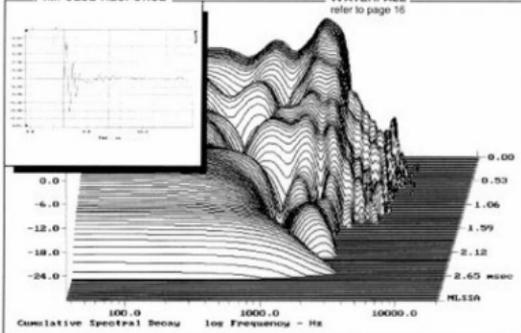
**SUGGESTED APPLICATIONS**

refer to page 8 to 13

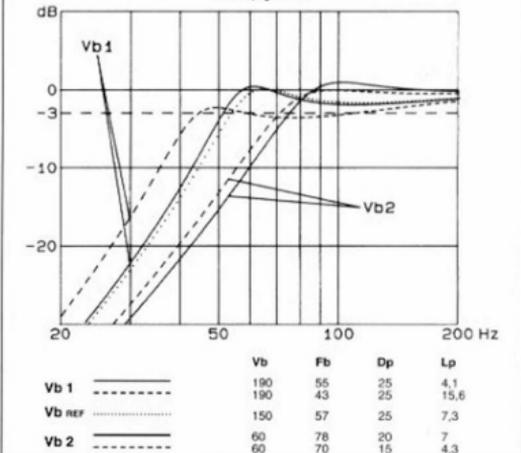

Please refer to method of measurement and measurement conditions pages 15 to 19.

Audax may, without prior notification modify the specifications on its products further to research and development requirements.