

NSR15ADXV6T1, NSR15ADXV6T5

Dual RF Schottky Diode

These diodes are designed for analog and digital applications, including DC based signal detection and mixing applications.

Features

- Low Capacitance (<1.0 pF)
- Low V_F (390 mV Typical @ 1.0 mA)
- Low V_{FD} (1.0 mV Typical @ 1.0 mA)
- These are Pb-Free Devices

Benefits

- Reduced Parasitic Losses
- Accurate Signal Measurement

MAXIMUM RATINGS

Rating	Symbol	Max	Unit
Peak Reverse Voltage	V_R	15	V
Forward Current	I_F	30	mA
Operating and Storage Temperature Range	T_J, T_{stg}	-65 to +150	°C
ESD Rating:	Class 1 per Human Body Model Class A per Machine Model		



Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.



ON Semiconductor®


<http://onsemi.com>

RF SCHOTTKY BARRIER DIODES 15 VOLTS, 30 mA



**SOT-563
CASE 463A**

MARKING DIAGRAM



5R = Specific Device Code
D = Date Code

ORDERING INFORMATION

Device	Package	Shipping†
NSR15ADXV6T1	SOT-563	4 mm pitch 4000 / Tape & Reel
NSR15ADXV6T5	SOT-563	2 mm pitch 8000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

NSR15ADXV6T1, NSR15ADXV6T5

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Min	Typ	Max	Unit
Breakdown Voltage ($I_R = 10 \mu\text{A}$)	V_{BR}	15	20	-	V
Reverse Leakage ($V_R = 1.0 \text{ V}$)	I_R	-	2	50	nA
Forward Voltage ($I_F = 1.0 \text{ mA}$)	V_{F1}	-	390	415	mV
Forward Voltage ($I_F = 10 \text{ mA}$)	V_{F2}	-	530	680	mV
Delta V_F	ΔV_F	-	1	15	mV
Capacitance ($V_F = 0 \text{ V}$, $f = 1.0 \text{ MHz}$)	C_T	-	0.8	1	pF

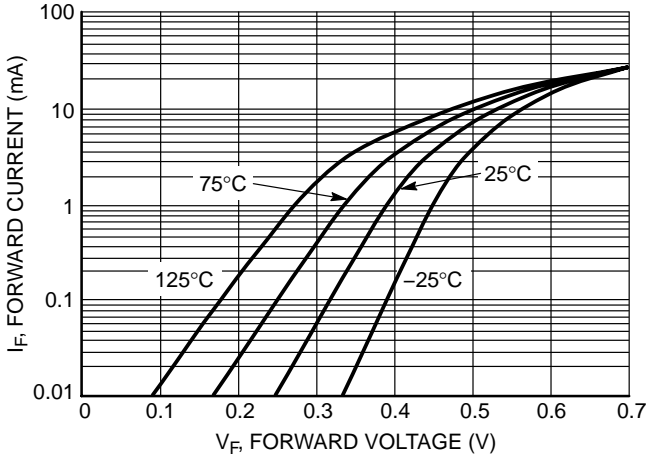


Figure 1. Forward Current versus Forward Voltage at Temperatures

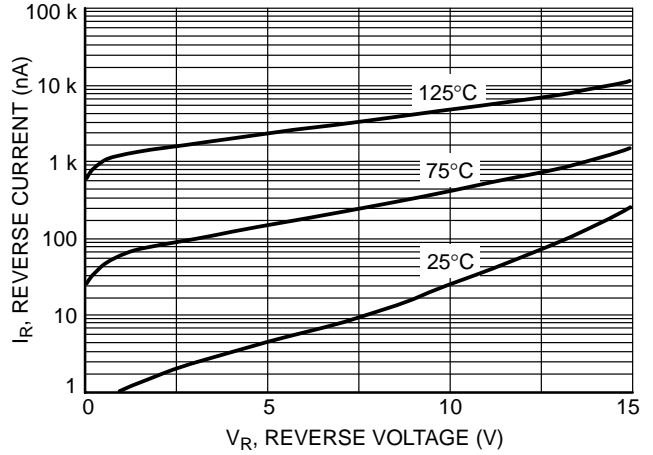


Figure 2. Reverse Current versus Reverse Voltage

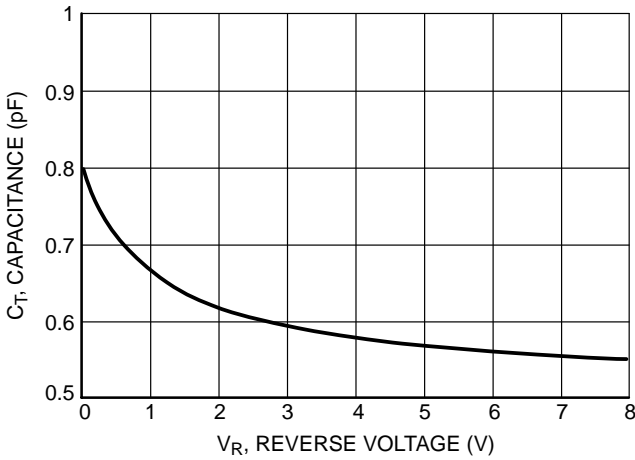


Figure 3. Total Capacitance versus Reverse Voltage

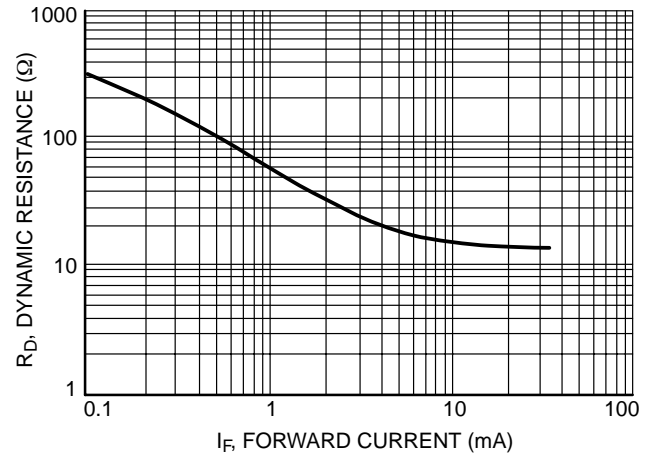


Figure 4. Dynamic Resistance versus Forward Current

NSR15ADXV6T1, NSR15ADXV6T5

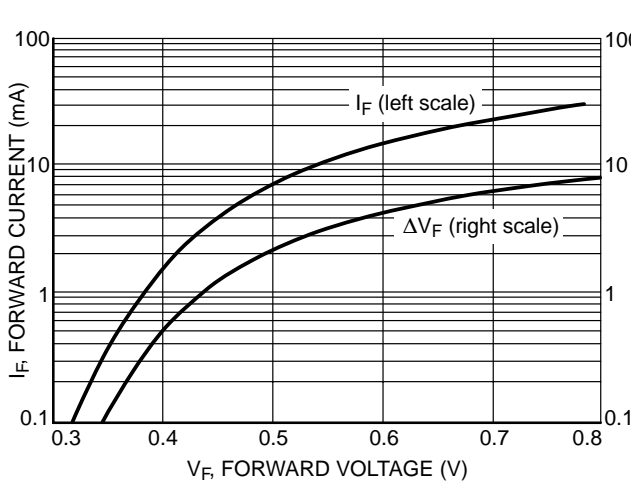


Figure 5. Typical V_F Match at Mixer Bias Levels

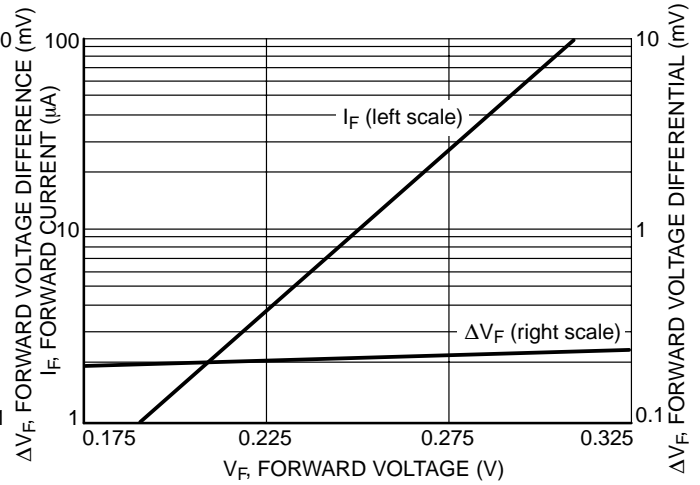


Figure 6. Typical V_F Match at Detector Bias Levels

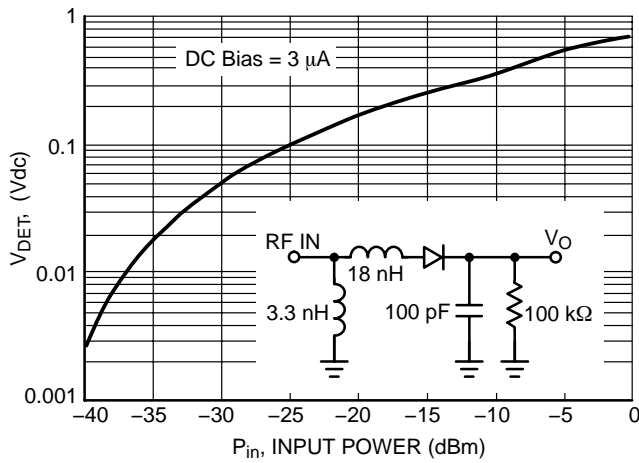


Figure 7. Typical Output Voltage versus Input Power, Small Signal Detector Operating at 850 MHz

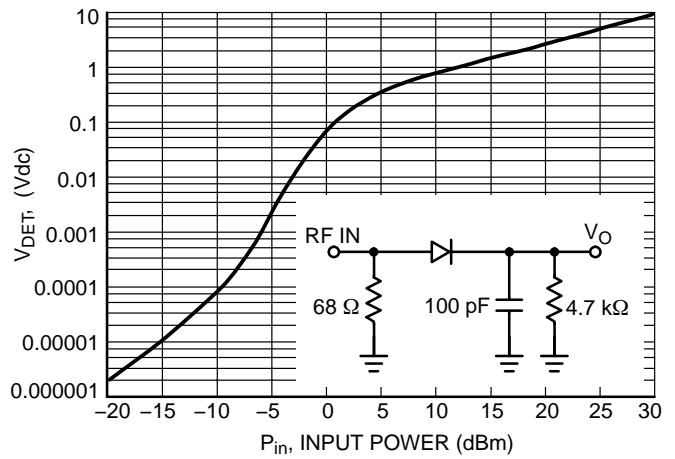


Figure 8. Typical Output Voltage versus Input Power, Large Signal Detector Operating at 915 MHz



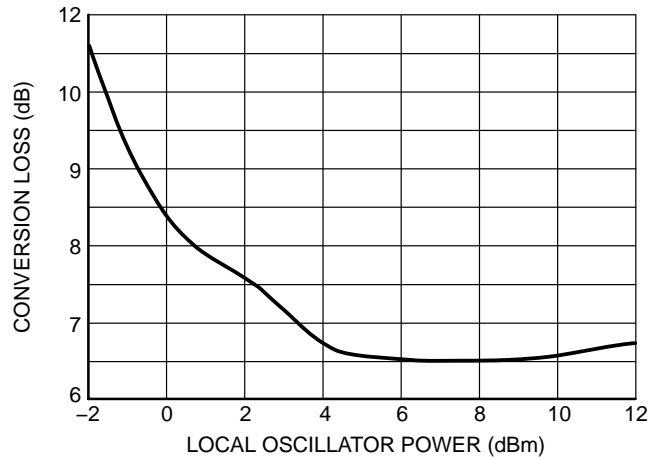


Figure 9. Typical Conversion Loss versus L.O. Drive, 2.0 GHz

NSR15ADXV6T1, NSR15ADXV6T5

PACKAGE DIMENSIONS

SOT-563-6
CASE 463A-01
ISSUE C

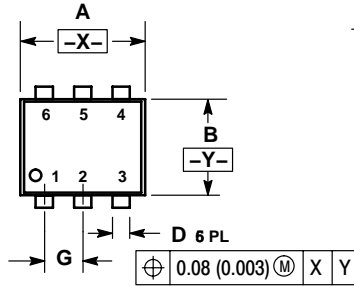


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.50	1.70	0.059	0.067
B	1.10	1.30	0.043	0.051
C	0.50	0.60	0.020	0.024
D	0.17	0.27	0.007	0.011
G	0.50 BSC		0.020 BSC	
J	0.08	0.18	0.003	0.007
K	0.10	0.30	0.004	0.012
S	1.50	1.70	0.059	0.067


SOLDERING FOOTPRINT*

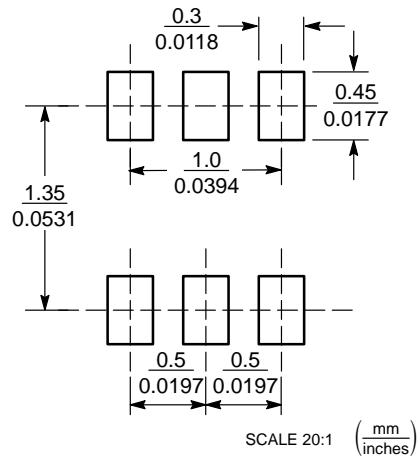

SCALE 20:1 ($\frac{\text{mm}}{\text{inches}}$)

SOT-563

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051
Phone: 81-3-5773-3850

ON Semiconductor Website: <http://onsemi.com>

Order Literature: <http://www.onsemi.com/litorder>

For additional information, please contact your local Sales Representative.

NSR15ADXV6T1/D