

GREEN LABEL

GREEN LABEL SPEAKERS ARE PRIMED FOR HIGH-POWER ROCK PERFORMANCES, WHERE A FULL-BODIED, WARM, DEFINED TONE IS ESSENTIAL.




BL10-100X

BASS GUITAR LOUDSPEAKER



Frequency Response and Impedance Curves

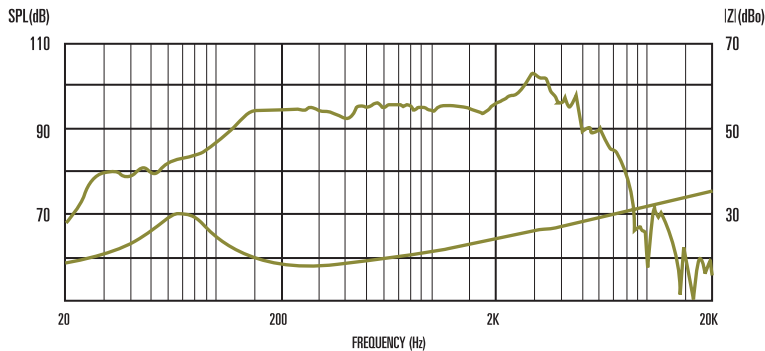

General Parameters

Nominal diameter	254mm/10in
Power Rating (rms)	100W
Nominal impedance	8Ω
Voice coil diameter	38.1mm/1.5in
Magnet type	Ferrite
Sensitivity	94dB
Frequency range	45-3500Hz
Coil material	Copper
Former material	Polyimide
Cone material	Kevlar loaded paper
Surround material	Cloth-sealed
Xmax	3.5mm/0.14in
Gap depth	6mm/0.24in
Voice coil winding width	13mm/0.51in

Small Signal Parameters

D	0.21m/8.27in
Fs	76.7Hz
Mmd	25.51g/0.90oz
Mair	3.64g/0.128oz
Qms	2.878
Qes	0.653
Qts	0.532
Re	6.67Ω
Vas	25.06lt/0.88ft ³
Bl	11.98Tm
Cms	0.148mm/N
Rms	4.883kg/s
Le	0.73mH

Mounting Information

Diameter	256mm/10.1in
Overall depth	107mm/4.2in
Cut-out diameter	229mm/9in
Mounting slot dimensions	6 x 8mm/0.24 x 0.31in
Number of mounting slots	4
Mounting slot PCD	245mm/9.6in
Unit weight	2.4kg/5.3lb

Unit conditioned prior to measurement.