

GREEN LABEL

GREEN LABEL SPEAKERS ARE PRIMED FOR HIGH-POWER ROCK PERFORMANCES, WHERE A FULL-BODIED, WARM, DEFINED TONE IS ESSENTIAL.




BL10-200X

BASS GUITAR LOUDSPEAKER



Frequency Response and Impedance Curves

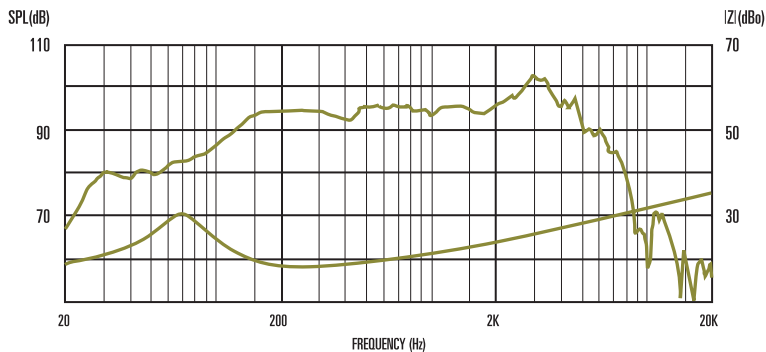

General Parameters

Nominal diameter	254mm/10in
Power Rating (rms)	200W
Nominal impedance	8Ω
Voice coil diameter	50.8mm/2in
Magnet type	Ferrite
Sensitivity	94dB
Frequency range	45-3500Hz
Coil material	Copper
Former material	Polyimide
Cone material	Kevlar loaded paper
Surround material	Cloth-sealed
Xmax	4mm/0.15in
Gap depth	8mm/0.31in
Voice coil winding width	16mm/0.62in

Small Signal Parameters

D	0.21m/8.27in
Fs	73Hz
Mmd	31.95g/1.123oz
Mair	3.64g/0.128oz
Qms	3.58
Qes	0.56
Qts	0.48
Re	5.8Ω
Vas	22.74lt/0.80ft ³
Bl	13.02Tm
Cms	0.13mm/N
Rms	4.55kg/s
Le	0.92mH

Mounting Information

Diameter	256mm/10.1in
Overall depth	110mm/4.3in
Cut-out diameter	229mm/9in
Mounting slot dimensions	6 x 8mm/0.24 x 0.31in
Number of mounting slots	4
Mounting slot PCD	245mm/9.6in
Unit weight	3kg/6.6lb

Unit conditioned prior to measurement.