

**AUDAX**2<sup>3/4"</sup> - Polymer cone driver - 70 mm**CS070V0**

LA PASSION DU HAUT-PARLEUR

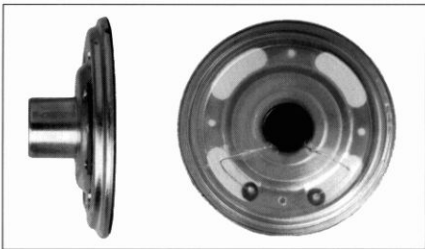
FULL RANGE

100921M

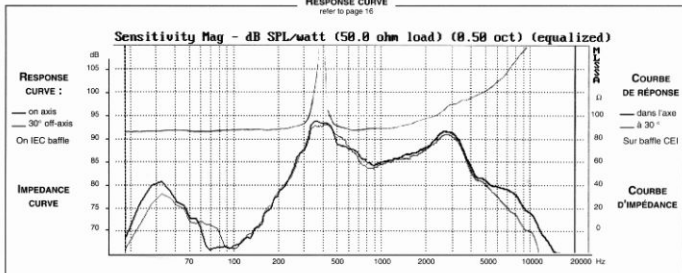
**INDUSTRIAL SERIES**

Impedance 50  $\Omega$   
 Alnico magnet  
 Antimagnetic  
 Stamped steel chassis  
 Polymer cone

Impédance 50  $\Omega$   
 Aimant Alnico  
 Antimagnétique  
 Châssis acier embouti  
 Cône polymère

**RESPONSE CURVE**

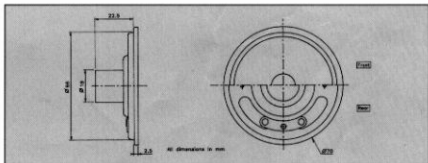
refer to page 16

**SPECIFICATIONS**

Technical Characteristics	Symbol	Value	Units
<b>PRIMARY APPLICATIONS</b>			
Nominal Impedance	Z	50	$\Omega$
Resonance Frequency	Fs	450	Hz
Nominal Power Handling	P	0,3	W
Sensitivity	E	87	dB
<b>VOICE COIL</b>			
Voice coil diameter	$\varnothing$	14	mm
Voice coil length	h	6,7	mm
DC Resistance	Re	6	$\Omega$
Former	-	Aluminium	-
<b>MAGNET</b>			
Magnet dimensions	$\varnothing \times h$	13 x 12	mm
Magnet weight	m	222.10 <sup>-3</sup>	kg
Force factor	BL	-	NA <sup>1</sup>
Linear excursion	Xmax	-	mm
<b>PARAMETERS</b>			
Total Q Factor	Qts	-	-
Moving Mass	Mms	-	kg
Volume Eq. of Air at Cas	Vas	-	m <sup>3</sup>
Mass of speaker	M	50.10 <sup>-1</sup>	kg

A 2<sup>3/4"</sup> driver designed for telecommunications engineering equipment, security equipment. It offers : Alnico shielded magnet system and polymer cone with good environmental properties.

Ce haut-parleur de 70 mm est particulièrement destiné à des applications de type communications, équipements de mesures et de laboratoires, sécurité etc... Son système magnétique Alnico est blindé, le cône en polymère est peu sensible aux agents atmosphériques.



CS070V0 F50VVA1411

Please refer to method of measurement and measurement conditions page 15 to 19.

Audax may, without prior notification modify the specifications on its products further to research and development requirements.

100959X

187