

Specification

Nominal Basket Diameter	8", 203mm
Nominal Impedance*	8 ohms
Power Rating**	
Watts	30W
Music Program	
Resonance	101Hz
Usable Frequency Range***	100Hz-6.5kHz
Sensitivity	94.5
Magnet Weight	9oz
Gap Height	.24", 5.99mm
Voice Coil Diameter	1.0", 25.4mm

Thiele & Small Parameters

Resonant Frequency (fs)	101Hz
DC Resistance (Re)	6.1
Coil Inductance (Le)	.42mH
Mechanical Q (Qms)	9.87
Electromagnetic Q (Qes)	1.49
Total Q (Qts)	1.3
Compliance Equivalent Volume (Vas)	17.49 ltr./ .62cuft
Peak Diaphragm Displacement Volume (Vd)	14.00cc
Mechanical Compliance of Suspension (Cms)	.26mm/N
BL Product (BL)	4.9 T-M
Diaphragm Mass inc. Airload (Mms)	9.4 grams
Efficiency Bandwidth Product (EBP)	68
Maximum Linear Excursion (Xmax)	.6mm
Surface Area of Cone (Sd)	218.2cm ²
Maximum Mechanical Limit (Xlim)	N/A

Mounting Information

Recommended Enclosure Volume	
Sealed	N/A
Vented	N/A
Overall Diameter	8.24", 209.30mm
Baffle Hole Diameter	7.10", 180.34mm
Front Sealing Gasket	fitted as standard
Rear Sealing Gasket	fitted as standard
Mounting Holes Diameter	.22", 5.59mm
Mounting Holes B.C.D.	7.79", 197.87mm
Depth	2.90", 73.66mm
Net Weight	2.50 lbs, 1.13 kg
Shipping Weight	

Materials of Construction

Coil Construction	Copper
Coil Former	Polyimide
Magnet Composition	Ferrite
Motor Details	Extended Core
Basket Material	Steel
Cone Composition	Full Molded Paper
Cone Edge Composition	Paper
Dust Cap Composition	Zurette




EMINENCE[®]

 DONGGUAN



EGTR-S108

Lead / Rhythm Guitar

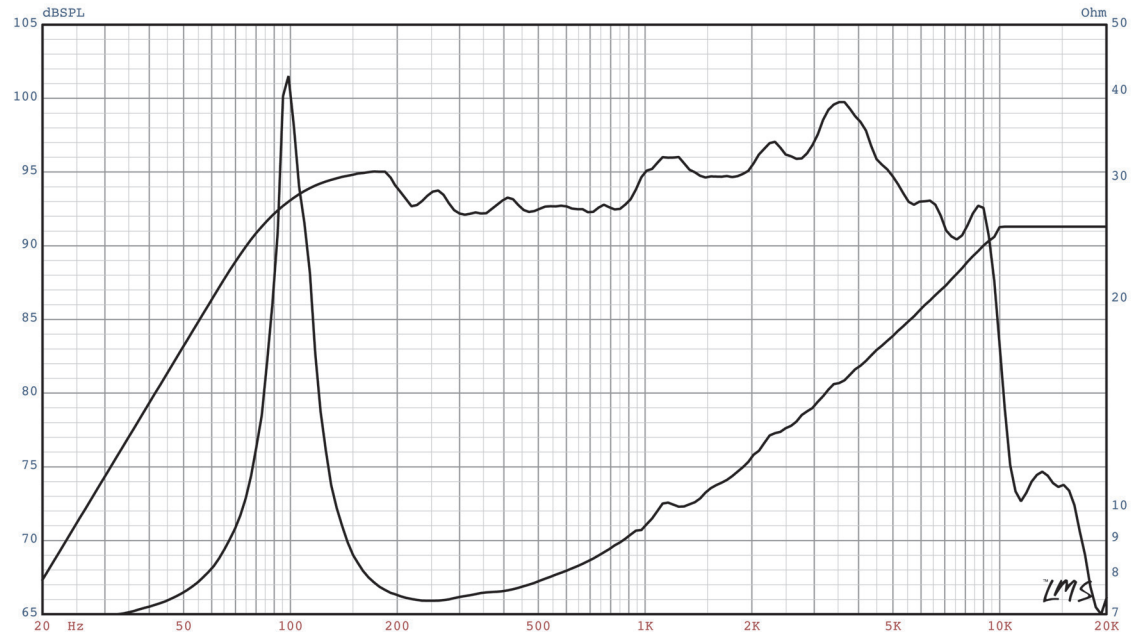

* Please inquire about alternative impedances.

** Multiple units exceed published rating evaluated under EIA 426A noise source and test standard while in a free-air, non-temperature controlled environment.

*** The average output across the usable frequency range when applying 1W/1M into the nominal impedance. ie: 2.83V/8ohms, 4V/16ohms.

Eminence response curves are measured under the following conditions: All speakers are tested at 1w/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft. X 2ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Hafler P1500 Trans-Nova amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges)