

# Input selector for high resolution displays

## BH7659S / BH7659FS

The BH7659S / BH7659FS are input signal switching ICs developed for high resolution displays that have three  $f_c = 250\text{MHz}$  wide-band video switching circuits for RGB video signal switching and four CMOS analog switching circuits for switching between  $H_b$  and  $V_b$  signals as well as I<sup>2</sup>C bus signals (SDA and SCL).

### ●Applications

High-resolution displays and high-definition TVs

### ●Features

- 1) Operates with a 5V power supply voltage.
- 2) Built-in, wide-band switching circuit for RGB switching ( $f_c = 250\text{MHz}$ ).
- 3) SDA and SCL as well as  $H_b$  and  $V_b$  signal switching is possible.
- 4) Built-in power save function.

### ●Absolute maximum ratings ( $T_a = 25^\circ\text{C}$ )

Parameter	Symbol	Limits	Unit
Power supply voltage	$V_{cc}$	8.0	V
Power dissipation	Pd	1300*1 (SDIP32)	mW
		800*2 (SSOP-A32)	
Operating temperature	$T_{opr}$	- 25 ~ + 75	°C
Storage temperature	$T_{stg}$	- 55 ~ + 125	°C

\*1 Reduced by 13mW for each increase in  $T_a$  of 1°C over 25°C.

\*2 Reduced by 8.0mW for each increase in  $T_a$  of 1°C over 25°C.


### ●Recommended operating conditions ( $T_a = 25^\circ\text{C}$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit
Operating power supply voltage	$V_{cc}$	4.5	5.0	5.5	V

© Not designed for radiation resistance.

Multimedia ICs

●Block diagram

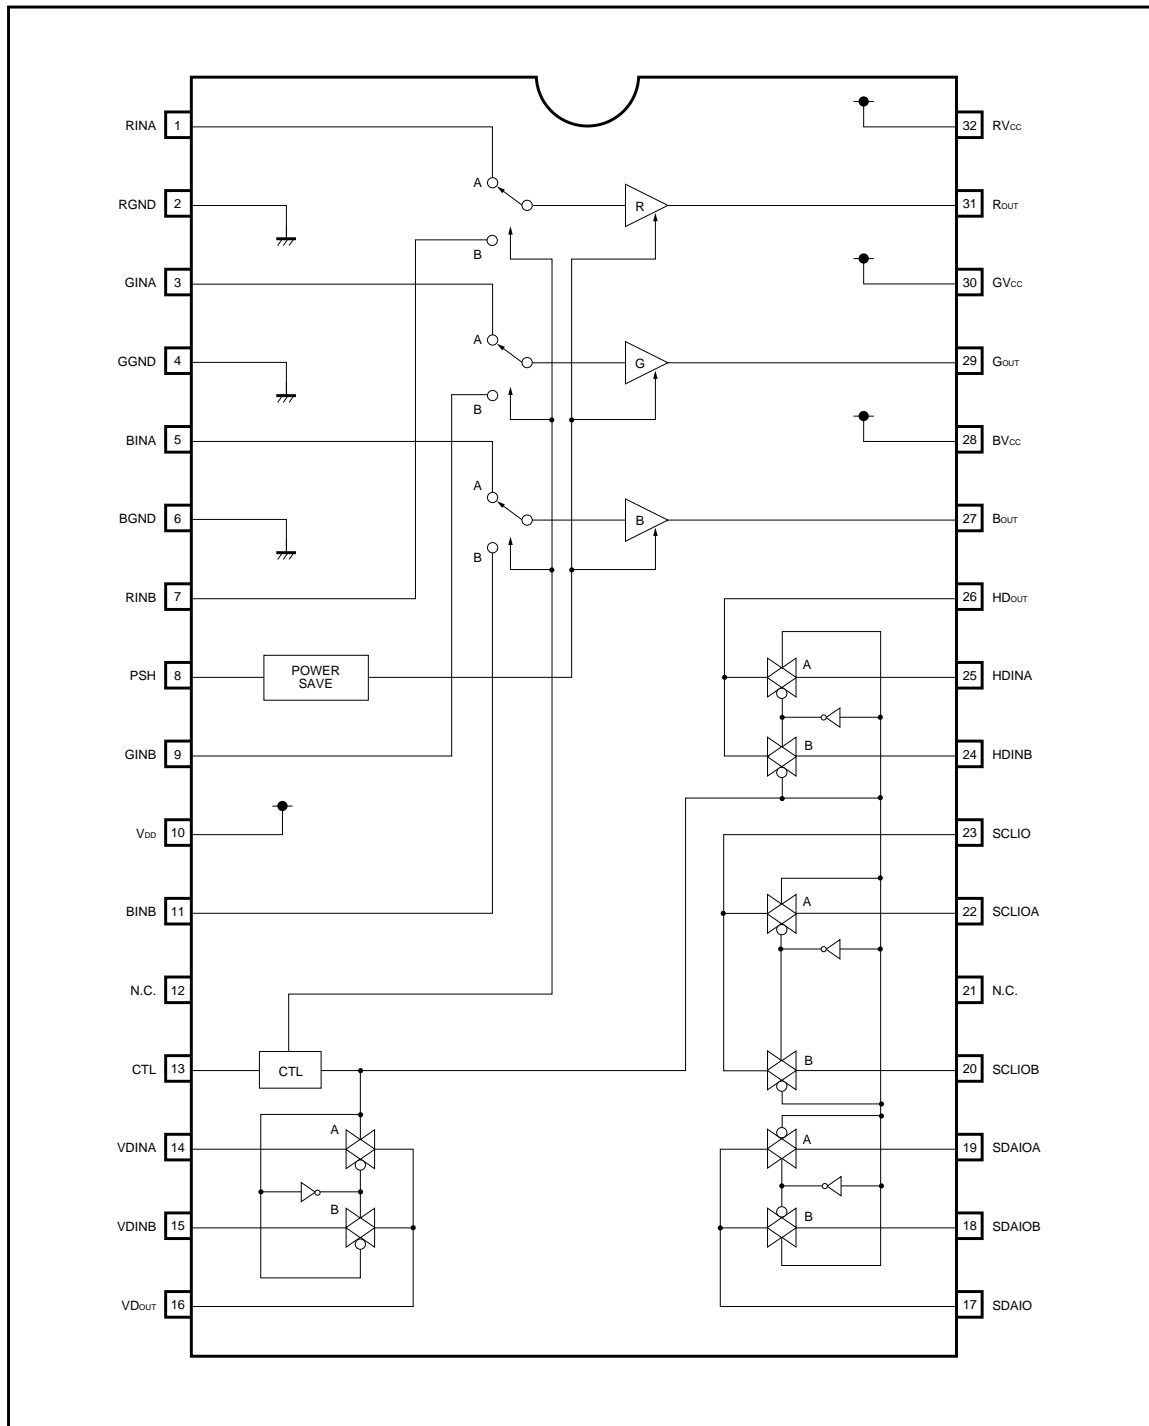

Multimedia ICs

●Input / Output equivalent circuits

Pin No.	Pin description (pin name)	Reference potential	Input / output circuit	Function
1 3 5 7 9 11	Red signal input A (RINA) Green signal input A (GINA) Blue signal input A (BINA) Red signal input B (RINB) Green signal input B (GINB) Blue signal input B (BINB)	3.5V when selected 0V when not selected		Switches between the two RGB signaling systems. Input B is selected by setting the CTL pin to high and input A to low.
27 29 31	Blue signal output (BOUT) Green signal output (GOUT) Red signal output (ROUT)	1.85V		Power save activates by setting the PSH pin to high.
8 9	Power save input (PSH) Control input (CTL)	0V		PSH Power save off $\leq 1.5V$ Power save on $\geq 3.5V$  CTL Input A $\geq 3.5V$ Input B $\leq 1.5V$

## Multimedia ICs

Pin No.	Pin description (pin name)	Reference potential	Input / output circuit	Function
14	VD signal input A (VDINA)			<p>Switches between the two VD, HD, SDA, and SCL signaling systems.</p> <p>Input B is selected by setting the CTL pin to high and input A to low.</p> <p>Bi-directional I / O is possible with CMOS analog switch</p>
15	VD signal input B (VDINB)			
16	VD signal output (VDOUT)			
17	SDA signal I / O (SDAIO)			
18	SDA signal I / O B (SDAIOB)			
19	SDA signal I / O A (SDAIOA)			
20	SCL signal I / O B (SCLIOB)			
22	SCL signal I / O A (SCLIOA)			
24	SCL signal I / O (SCLIO)			
25	HD signal input B (HDINB)			
26	HD signal input A (HDINA)			
27	HD signal output (HDOUT)			
2	Red ground (RGND)	0V		
4	Green ground (GGND)	0V	—	Green video SW block GND
6	Blue ground (BGND)	0V	—	Blue video SW block and CMOS SW block GND
10	CMOS power supply voltage (V <sub>DD</sub> )	5V	—	CMOS SW block V <sub>DD</sub>
28	Blue power supply voltage (BV <sub>CC</sub> )	5V	—	Blue video SW block V <sub>CC</sub>
30	Green power supply voltage (GV <sub>CC</sub> )	5V	—	Green video SW block V <sub>CC</sub>
32	Red power supply voltage (RV <sub>CC</sub> )	5V	—	Red video SW block V <sub>CC</sub>

## Multimedia ICs

● **Electrical characteristics** (unless otherwise noted,  $V_{CC}=5.0V$ ,  $T_a = 25^\circ C$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
(Overall device)						
Circuit current	$I_{CC}$	15	25	35	mA	—
Circuit current during power save	$I_{PSV}$	7	14	22	mA	PS = "H"
(R, G, and B video switches)						
Voltage gain	$G_V$	-1.0	-0.5	0	dB	$f = 10MHz$
Interchannel relative gain	$\Delta G_{VC}$	-0.5	0	0.5	dB	$f = 10MHz$
Interblock relative gain	$\Delta G_{VB}$	-0.5	0	0.5	dB	$f = 10MHz$
Output dynamic range	$V_{OM}$	2.6	—	—	$V_{P-P}$	$f = 1kHz$
(CMOS analog switch)						
On-resistance	$R_{ON}$	—	200	400	$\Omega$	$V_{IN} = 2.5V$
Interchannel on-resistance difference	$\Delta R_{ON}$	—	20	40	$\Omega$	$V_{IN} = 2.5V$
Interchannel crosstalk	CT	—	-70	-55	dB	$f = 150kHz$
Transmission delay time	$t_D$	—	20	—	ns	$R_L = 10\Omega$ , $C_L = 50pF$
(Control block)						
High level voltage	$V_H$	3.5	—	—	V	—
Low level voltage	$V_L$	—	—	1.5	V	—

● **Guaranteed design parameters** (unless otherwise noted,  $V_{CC}=5.0V$ ,  $T_a = 25^\circ C$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
(R, G, and B video switches)						
Frequency characteristics 1	$f_1$	-3.0	0	+1.0	dB	$f = 50MHz$
Frequency characteristics 2	$f_2$	-6.0	-3	-1.0	dB	$f = 250MHz$
Interchannel relative frequency characteristics	$\Delta f_C$	-0.5	0	0.5	dB	$f = 50MHz$
Interblock relative frequency characteristics	$\Delta f_B$	-0.5	0	0.5	dB	$f = 50MHz$
Interchannel crosstalk 1	$CT_{C1}$	—	-50	-35	dB	$f = 50MHz$
Interchannel crosstalk 2	$CT_{C2}$	—	-30	-15	dB	$f = 250MHz$
Interblock crosstalk 1	$CT_{B1}$	—	-50	-35	dB	$f = 50MHz$
Interblock crosstalk 2	$CT_{B2}$	—	-30	-15	dB	$f = 250MHz$

Multimedia ICs

● Measurement circuit 1

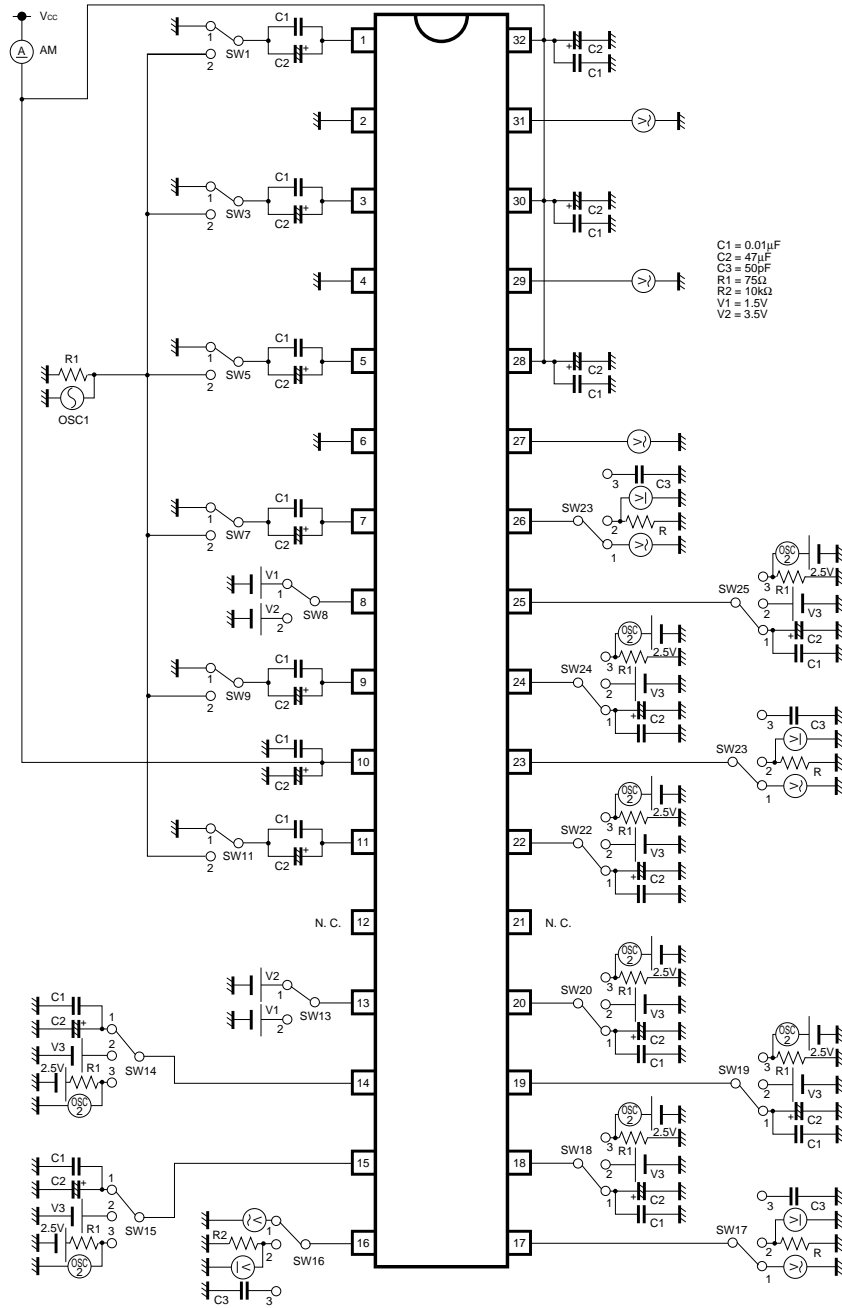


Fig.1

Multimedia ICs

● Measurement circuit 2

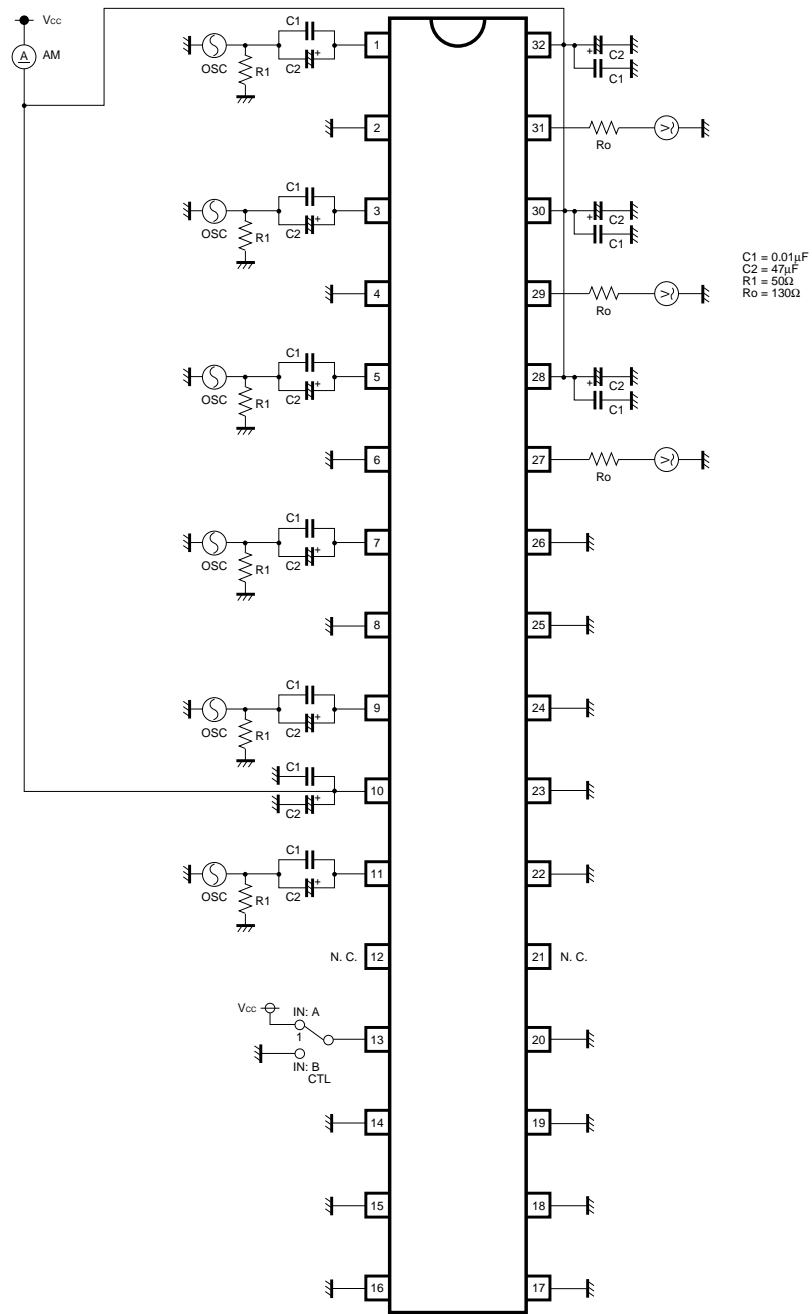


Fig.2

## Multimedia ICs

## ● Measurement conditions

&lt;Overall device&gt; measurement circuit 1

Parameter	Switch conditions		Notes
	8	Others	
Circuit current	1	1	(1)
Circuit during power save	2	1	(2)

&lt;R, G, and B video switches&gt; measurement circuit 2

Parameter		Input pin: (OSC)						Switch conditions	Notes
		1	7	3	9	5	11	CTL	
Voltage gain ( $G_v$ )	RinA	○	—	—	—	—	—	IN: A	(3)
Output dynamic range ( $V_{OM}$ )	RinB	—	○	—	—	—	—	IN: B	(6)
	GinA	—	—	○	—	—	—	IN: A	
Frequency characteristics 1 ( $f_1$ )	GinB	—	—	—	○	—	—	IN: B	(7)
	BinA	—	—	—	—	○	—	IN: A	
Frequency characteristics 2 ( $f_2$ )	BinB	—	—	—	—	—	○	IN: B	(8)
Interchannel crosstalk 1 ( $CT_{C1}$ )	RinA→B	○	—	—	—	—	—	IN: B	(11)
	RinB→A	—	○	—	—	—	—	IN: A	
Interchannel crosstalk 2 ( $CT_{C2}$ )	GinA→B	—	—	○	—	—	—	IN: B	(12)
	GinB→A	—	—	—	○	—	—	IN: A	
Interblock crosstalk 1 ( $CT_{B1}$ )	BinA→B	—	—	—	—	○	—	IN: B	(13)
	BinB→A	—	—	—	—	—	○	IN: A	
Interblock crosstalk 2 ( $CT_{B2}$ )	G→RinA	—	—	○	—	—	—	IN: A	(14)
	B→RinA	—	—	—	—	○	—	IN: A	
Interblock crosstalk 2 ( $CT_{B2}$ )	R→GinA	○	—	—	—	—	—	IN: A	(14)
	B→GinA	—	—	—	—	○	—	IN: A	
Interblock crosstalk 2 ( $CT_{B2}$ )	R→BinA	○	—	—	—	—	—	IN: A	(14)
	G→BinA	—	—	○	—	—	—	IN: A	
Interchannel relative gain: $\Delta G_{vc}$									(4)
Interblock relative gain: $\Delta G_{vB}$									(5)
Interchannel relative frequency characteristics: $\Delta f_c$									(9)
Interblock relative frequency characteristics: $\Delta f_B$									(10)



## Multimedia ICs

## &lt;C-ROM analog switch&gt; measurement circuit 1

Parameter		Switch conditions														Notes
		13	14	15	16	17	18	19	20	22	23	24	25	26	others	
On-resistance ( $R_{ON}$ )	VDinA	1	2	1	2	1	1	1	1	1	1	1	1	1	1	(15)
	VDinB	2	1	2	2	1	1	1	1	1	1	1	1	1	1	
	SDinA	1	1	1	1	2	1	2	1	1	1	1	1	1	1	
	SDinB	2	1	1	1	2	2	1	1	1	1	1	1	1	1	
	SCinA	1	1	1	1	1	1	1	1	2	2	1	1	1	1	
	SCinB	2	1	1	1	1	1	1	2	1	2	1	1	1	1	
	HDinA	1	1	1	1	1	1	1	1	1	1	1	2	2	1	
	HDinB	2	1	1	1	1	1	1	1	1	1	2	1	2	1	
Interchannel crosstalk (CT)	VDinA→B	1	3	1	1	1	1	1	1	1	1	1	1	1	1	(17)
	VDinB→A	2	1	3	1	1	1	1	1	1	1	1	1	1	1	
	SDinA→B	1	1	1	1	1	1	3	1	1	1	1	1	1	1	
	SDinB→A	2	1	1	1	1	3	1	1	1	1	1	1	1	1	
	SCinA→B	1	1	1	1	1	1	1	1	3	1	1	1	1	1	
	SCinB→A	2	1	1	1	1	1	1	3	1	1	1	1	1	1	
	HDinA→B	1	1	1	1	1	1	1	1	1	1	1	3	1	1	
	HDinB→A	2	1	1	1	1	1	1	1	1	1	3	1	1	1	
Transmission delay time ( $t_D$ )	VDinA	1	3	1	3	1	1	1	1	1	1	1	1	1	1	(18)
	VDinB	2	1	3	3	1	1	1	1	1	1	1	1	1	1	
	SDinA	1	1	1	1	3	1	3	1	1	1	1	1	1	1	
	SDinB	2	1	1	1	3	3	1	1	1	1	1	1	1	1	
	SCinA	1	1	1	1	1	1	1	1	3	3	1	1	1	1	
	SCinB	2	1	1	1	1	1	1	3	1	3	1	1	1	1	
	HDinA	1	1	1	1	1	1	1	1	1	1	1	3	3	1	
	HDinB	2	1	1	1	1	1	1	1	1	1	3	1	3	1	
Interchannel on-resistance difference ( $\Delta R_{ON}$ )															(16)	

## Notes:

- (1) Circuit current :  $I_{CC}$  ; measurement of the circuit current.  
(2) Circuit current during power save :  $I_{PSV}$  ; measurement of the circuit current during power save.  
(3) Voltage gain :  $G_V$

$V_{IN} = 1.0V_{P-P}$ ,  $f = 10MHz$  sine wave input from the OSC

$$G_V = 20 \log (V_{OUT} / V_{IN}) \text{ [ dB ]}$$

- (4) Interchannel relative gain :  $\Delta G_{VC}$

$$\Delta G_{VC} = G_V R_a - G_V R_b, G_V G_a - G_V G_b, G_V B_a - G_V B_b \text{ [ dB ]}$$

- (5) Interblock relative gain :  $\Delta G_{VB}$

$$\Delta G_{VB} = G_V R_a - G_V G_a, G_V R_a - G_V G_b, G_V R_a - G_V B_a, G_V R_a - G_V B_b \text{ [ dB ]}$$

$$\Delta G_{VB} = G_V G_a - G_V R_a, G_V G_a - G_V R_b, G_V G_a - G_V B_a, G_V G_a - G_V B_b \text{ [ dB ]}$$

$$\Delta G_{VB} = G_V B_a - G_V R_a, G_V B_a - G_V R_b, G_V B_a - G_V G_a, G_V B_a - G_V B_b \text{ [ dB ]}$$

- (6) Output dynamic range :  $V_{OM}$

Connect a distortion meter to the output. After adding a  $f = 1kHz$  sine wave input from the OSC, adjust the input level so that the output distortion is 1.0%.

The output voltage at that time is  $V_{OM}$  [V<sub>P-P</sub>].


- (7) Frequency characteristics 1 :  $f_1$

Apply to the input pin a  $V_{IN} = 1.0V_{P-P}$ ,  $f = 10MHz$  and  $50MHz$  sine wave input from the OSC.

$$f_1 = G_V (50MHz) - G_V (10MHz) \text{ [ dB ]}$$


## Multimedia ICs

- (8) Frequency characteristics 2 :  $f_2$   
 Apply to the input pin a  $V_{IN} = 1.0V_{P-P}$ ,  $f = 10MHz$  and  $250MHz$  sine wave input from the OSC.  
 $f_2 = G_V(250MHz) - G_V(10MHz)$  [ dB ]
- (9) Interchannel relative frequency characteristics :  $\Delta f_c$   
 $\Delta f_c = f_1(INA) - f_1(INB)$  [ dB ]
- (10) Interblock relative frequency characteristics :  $\Delta f_b$   
 $\Delta f_b = f_1(RINA) - f_1(GINA), f_1(GINA) - f_1(BINA), f_1(BINA) - f_1(RINA)$  [ dB ]  
 $= f_1(RINB) - f_1(GINB), f_1(GINB) - f_1(BINB), f_1(BINB) - f_1(RINB)$  [ dB ]
- (11) Interchannel crosstalk 1 :  $CT_{C1}$   
 Apply to the input pin a  $V_{IN} = 1.0V_{P-P}$ ,  $f = 50MHz$  sine wave input from the OSC.  
 $CT_{C1} = 20\log(V_{OUT} / V_{IN})$  [ dB ]
- (12) Interchannel crosstalk 2 :  $CT_{C2}$   
 Apply to the input pin a  $V_{IN} = 1.0V_{P-P}$ ,  $f = 250MHz$  sine wave input from the OSC.  
 $CT_{C2} = 20\log(V_{OUT} / V_{IN})$  [ dB ]
- (13) Interblock crosstalk 1 :  $CT_{B1}$   
 Apply to the input pin a  $V_{IN} = 1.0V_{P-P}$ ,  $f = 50MHz$  sine wave input from the OSC.  
 $CT_{B1} = 20\log(V_{OUT} / V_{IN})$  [ dB ]
- (14) Interblock crosstalk 2 :  $CT_{B2}$   
 Apply to the input pin a  $V_{IN} = 1.0V_{P-P}$ ,  $f = 250MHz$  sine wave input from the OSC.  
 $CT_{B2} = 20\log(V_{OUT} / V_{IN})$  [ dB ]
- (15) On-resistance :  $R_{ON}$   
 $\Delta R_{ON} = (V_{OUT} / V_{IN} - 1) \times 10^4$  [  $\Omega$  ]
- (16) Interchannel on-resistance difference :  $\Delta R_{ON}$   
 $\Delta R_{ON} = R_{ON}(INA) - R_{ON}(INB)$
- (17) Interchannel crosstalk :  $CT$   
 Apply to the input pin a  $V_{IN} = 1.0V_{P-P}$ ,  $f = 150MHz$  sine wave input from the OSC2.  
 $CT = 20\log(V_{OUT} / V_{IN})$  [ dB ]
- (18) Transmission delay time :  $t_d$   
 Apply to the input pin the rectangular wave of P1 from the OSC2.

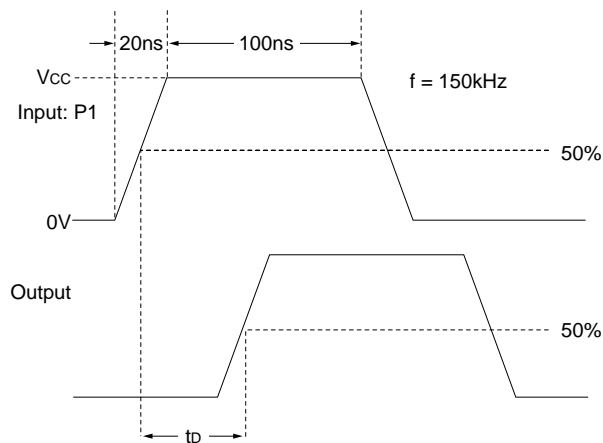

Multimedia ICs

●Application example

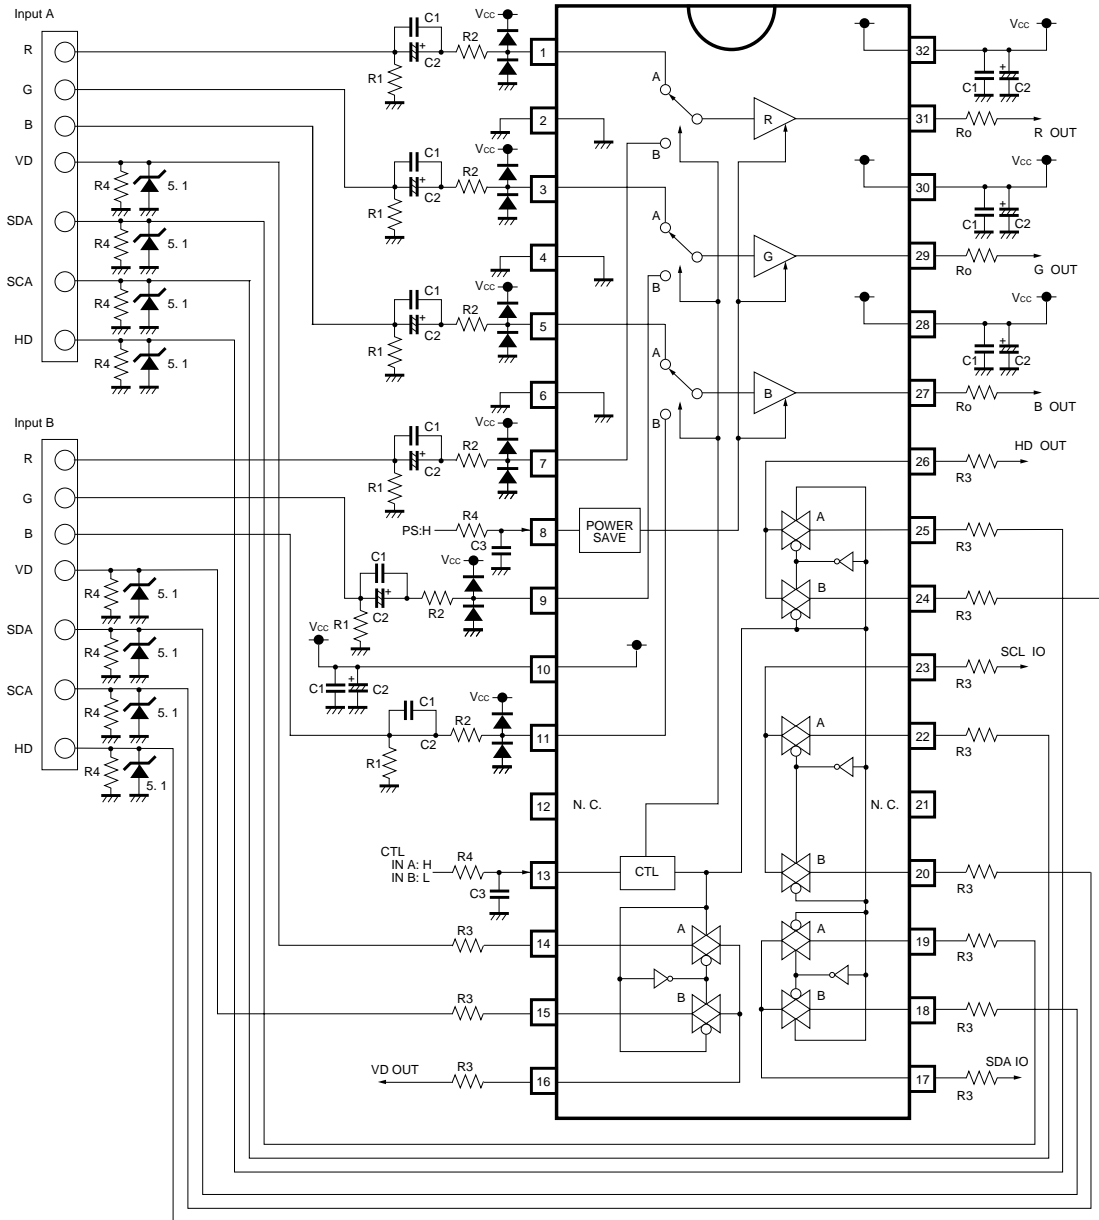

Note: The  $R_o$  value differs depending on the load capacitance.

Set so that the frequency characteristics are flat.

$R_1 = 75\Omega$      $C_1 = 0.01\mu\text{F}$

$R_2 = 47\Omega$      $C_1 = 47\mu\text{F}$

$R_3 = 100\Omega$      $C_1 = 0.1\mu\text{F}$

$R_4 = 1.2\text{k}\Omega$

Fig.3

Multimedia ICs

● External dimensions (Units : mm)

