

Overview

The STK401-330 is a 2-channel audio power amplifier IC that supports $6/3\Omega$ output load impedances. It is fully pin compatible with the 3-channel output devices (STK400-×00 series) and 2-channel output devices (STK401-×00 series). In addition, it supports $6/3\Omega$ output load impedance.


Features

- Pin compatible with the 3-channel output devices (STK400-x00 series) and 2-channel output devices (STK401-x00 series)
- Output load impedance $R_L = 6/3\Omega$ supported
- Pin configuration grouped into individual blocks of inputs, outputs and supply lines to minimize the adverse effects of pattern layout on operating characteristics.
- Few external components

Package Dimensions

unit: mm

4029



Specifications

Maximum Ratings at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit	
Maximum supply voltage	V _{CC} max		±65	V	
Thermal resistance	Ө ј-с	Per power transistor	1.0	°C/W	
Junction temperature	Tj		150	°C	
Operating substrate temperature	Tc		125	°C	
Storage temperature	_ Tstg		-30 to +125	°C	
Available time for load short-circuit	l _s	$V_{CC} = \pm 45V, R_L = 6\Omega,$ f = 50Hz, $P_O = 100W$	0.5	s	

Operating Characteristics at Ta = 25°C, $R_L = 6\Omega$ (noninductive load), $Rg = 600\Omega$, VG = 40dB


Parameter	Symbol	Conditions	min	typ	max	Unit W	
Output power	Po	V _{CC} = ±45V, f = 20Hz to 20kHz, THD = 0.08%	100	110	-		
Total harmonic distortion	THD(1)	V _{CC} = ±45V, f = 20Hz to 20kHz, P _O = 1.0W	-	-	0.08	%	
	THD(2)	$V_{CC} = \pm 45V, f = 1kHz,$ $P_{O} = 30W$	_	0.007	-	%	
Frequency response	f _L , f _H	$V_{CC} = \pm 45V, P_{O} = 1.0W, {}^{+0}_{-3} dB$	_	20 to 50k	-	Hz	
Input impedance	impedance r _i V		_	55	-	kΩ	
Output noise voltage	V _{NO}	$V_{CC} = \pm 54V$, $Rg = 10k\Omega$			1.2	mVrms	
Quiescent current	lcco	V _{CC} = ±54V	20	60	100	mA	
Neutral voltage V _N V _{CC}		V _{CC} = ±54V	-70	0	+70	mV	

All tests are measured using a constant-voltage supply unless otherwise specified.


Available time for load short-circuit and output noise voltage are measured using the transformer supply specified below.

The output noise voltage is the peak value of an average-reading meter with an rms value scale (VTVM). A regulated AC supply (50Hz) should be used to eliminate the effects of AC primary line flicker noise.


Specified Transformer Supply (MG-250 or Equivalent)

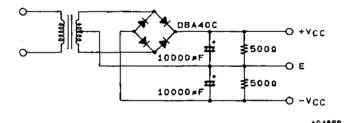

Equivalent Circuit

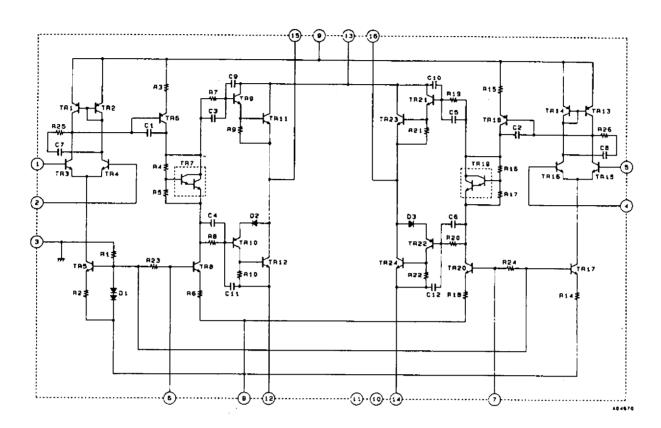

Sample Application Circuit

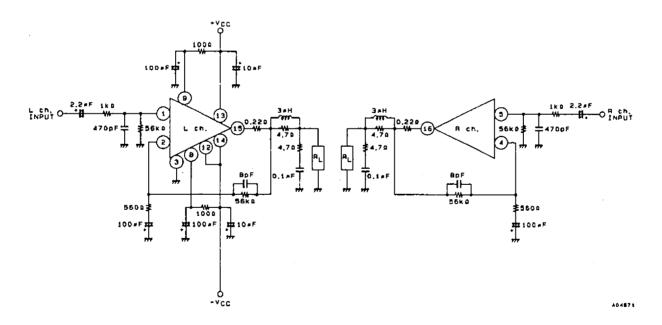

Series Configuration

These devices form a series of pin-compatible devices with different number of output channels, output ratings and total harmonic distortion. Some of these devices are under development. Contact your Sanyo sales representative if you require more detailed information.

STK400-000, STK400-200 series (3-channel, same output rating)			STK401-000, STK401-200 series (2-channel)					Supply voltage [V] ¹					
Туре No.	THD [%]	Type No.	THD [%]	Rated output	Type No.	THD [%]	Type No.	THD [%]	Rated output	V _{CC} max1	V _{CC} max2	V _{CC} 1	V _{CC} 2
STK400-010		STK400-210		10W × 3	STK401-010	0.4	STK401-210	0.08	10W×2	-	±26.0	±17.5	±14.0
STK400-020	1	STK400-220		15W×3	STK401-020		STK401-220		15W×2	-	±29.0	±20.0	±16.0
STK400-030	1	STK400-230	1	20W × 3	STK401-030		STK401-230		20W×2	_	±34.0	±23.0	±19.0
STK400-040	1	STK400-240		25W×3	STK401-040		STK401-240		25W × 2	-	±36.0	±25.0	±21.0
STK400-050	1	STK400-250	1	30W × 3	STK401-050		STK401-250		30W × 2	-	±39.0	±26.0	±22.0
STK400-060	1	STK400-260	0.08	35W×3	STK401-060		STK401-260		35W × 2	7	±41.0	±28.0	±23.0
STK400-070	0.4	STK400-270		40W×3	STK401-070		STK401-270		40W×2	-	±44.0	±30.0	±24.0
STK400-080	0.4	STK400-280		45W × 3	STK401-080		STK401-280		45W×2		±45.0	±31.0	±25.0
STK400-090	1	STK400-290	1	50W × 3	STK401-090		STK401-290		50W × 2	_	±47.0	±32.0	±26.0
STK400-100		STK400-300		60W × 3	STK401-100		STK401-300		60W × 2	-	±51.0	±35.0	±27.0
STK400-110	110 STK	STK400-310	}	70W×3	STK401-110		STK401-310		70W×2	±56.0		±38.0	-
			1		STK401-120		STK401-320		80W×2	±61.0		±42.0	-
	1		}		STK401-130	}	STK401-330] .	100W×2	±65.0	-	±45.0	-
	1		1		STK401-140	1	STK401-340	1	120W×2	±74.0		±51.0	-

	400-400, STK4 innel, different	Supply voltage [V] ¹							
Type No.	THD [%]	Туре No.	THD [%]	Rated output		V _{CC} max1	V _{CC} max2	V _{CC} 1	V _{CC} 2
STK400-450		STK400-650		Cch	30W	_	±39.0	±26.0	±22.0
311400-430		311400-000		Lch, Rch	15W	-	±29.0	±20.0	±16.0
STK400-460		STK400-660	0.08	Cch	35W		±41.0	±28.0	±23.0
31K400-400		31K400-000		Lch, Rch	15W	-	±29.0	±20.0	±16.0
STK400-470		CTV400 670		Cch	40W		±44.0	±30.0	±24.0
31N400-470		STK400-670		Lch, Rch	20W	-	±34.0	±23.0	±19.0
STK400-480		STK400-680		Cch	45W		±45.0	±31.0	±25.0
31 N400-460	"	511400-000		Lch, Rch	20W	_	±34.0	±23.0	±19.0
STK400-490	0.4	STK400-690		Cch	50W	_	±47.0	±32.0	±26.0
51K400-490	0.4			Lch, Rch	25W		±36.0	±25.0	±21.0
STK400-500	.]	STK400-700		Cch	60W	-	±51.0	±35.0	±27.0
518400-500				Lch, Rch	30W	_	±39.0	±26.0	±22.0
STK400-510		STK400-710		Cch	70W	±56.0	-	±38.0	<u> </u>
				Lch, Ach	35W	-	±41.0	±28.0	±23.0
STK400-520]	STK400-720		Cch	80W	±61.0	-	±42.0	
31N40U-02U	,	31K400-720		Lch, Rch	40W	-	±44.0	±30.0	±24.0
STK400-530	1	STK400-730]	Cch	100W	±65.0	-	±45.0	_
31N40U-03U		311400-730		Lch, Rch	50W	-	±47.0	±32.0	±26.0

^{1.} V_{CC} max1 (R_L = 6 Ω), V_{CC} max2 (R_L = 3 to 6 Ω), V_{CC} 1 (R_L = 6 Ω), V_{CC} 2 (R_L = 3 Ω)

Heatsink Design Considerations

The heatsink thermal resistance, θc -a, required to dissipate the STK401-330 device total power dissipation, Pd, is determined as follows:

Condition 1: IC substrate temperature not to exceed 125°C.

$$Pd \times \theta c-a + Ta < 125^{\circ}C$$
(1)

where Ta is the guaranteed maximum ambient tempera-

Condition 2: Power transistor junction temperature, Tj, not to exceed 150°C.

$$Pd \times \theta c-a + Pd/N \times \theta j-c + Ta < 150$$
°C(2)

where N is the number of power transistors and θ j-c is the power transistor thermal resistance per transistor. Note that the power dissipated per transistor is the total, Pd, divided evenly among the N power transistors.

Expressions (1) and (2) can be rewritten making θ c-a the subject.

$$\theta$$
c-a < (125 - Ta)/Pd.....(1)'

$$\theta c-a < (150 - Ta)/Pd - \theta j-c/N \dots (2)'$$

The heatsink required must have a thermal resistance that simultaneously satisfies both expressions.

The heatsink thermal resistance can be determined from (1)' and (2)' once the following parameters have been defined.

- Supply voltage: V_{CC}
- Load resistance: R_L
- Guaranteed maximum ambient temperature: Ta

The total device power dissipation when STK401-330 $V_{CC}=\pm45V$ and $R_L=6\Omega$, for a continuous sine wave signal, is a maximum of 138W, as shown in the Pd — P_O graph.

When estimating the power dissipation for an actual audio signal input, the rule of thumb is to select Pd corresponding to $(1/10) \times P_O$ max (within safe limits) for a continuous sine wave input. For example,

$$Pd = 86W [for (1/10) \times P_O max = 10W]$$


The STK401-330 has 4 power transistors, and the thermal resistance per transistor, θ j-c, is 1.0°C/W. If the guaranteed maximum ambient temperature, Ta, is 50°C, then the required heatsink thermal resistance, θ c-a, is:


From expression (1)':
$$\theta c-a < (125 - 50)/86 < 0.87$$


From expression (2)':
$$\theta$$
c-a < (150 – 50)/86 – 1.0/4 < 0.91

Therefore, to satisfy both expressions, the required heatsink must have a thermal resistance less than 0.87°C/W.

This heatsink design example is based on a constant-voltage supply, and should be verified within your specific set environment.





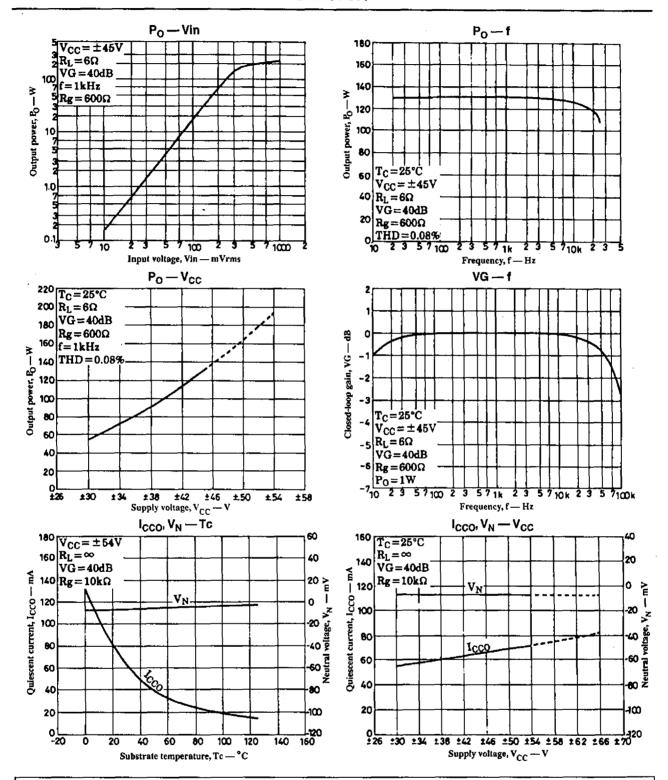

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees, jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.