

## TWEETER

TM020J9 D04SSZ0065S  
102122F


102309A

March .99

### Hi Fi . Round . Soft polymer 4 Ω




- Optimized advanced polymer dome profile
- Compact design for small high-end systems
- Smooth response face plate profile
- Ultra light copper clad aluminium wire
- High energy neodymium magnet (20 times ceramic magnet)
- Ferrofluid cooled voice coil (new generation : 250 cps)
- Inherently shielded magnet system for audio / video application

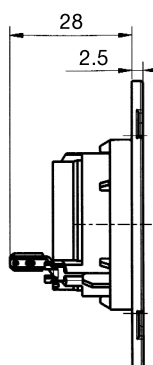


All dimensions in mm


4 x  $\phi$  4.5 on  $\phi$  57 at 90°

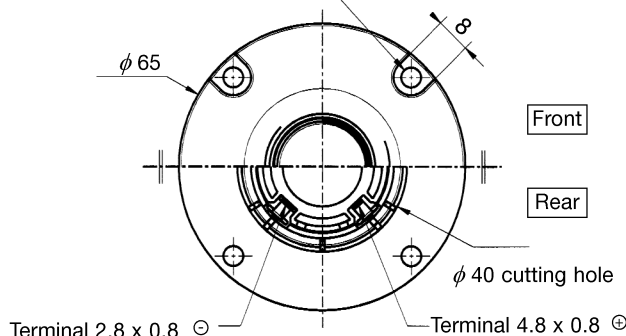

## Response Curve

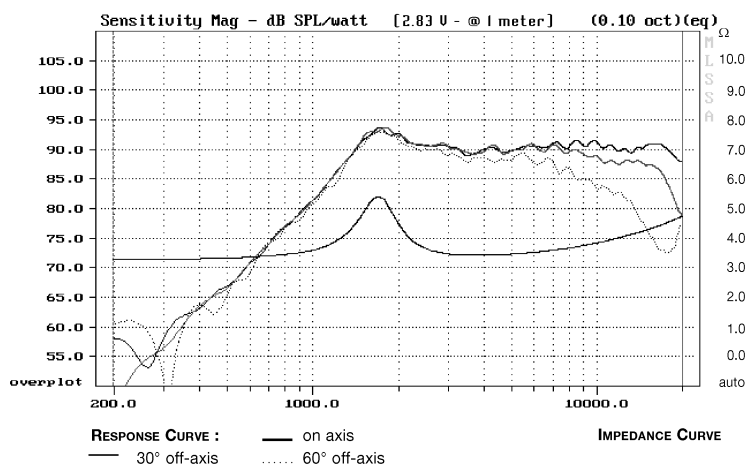

## Waterfall

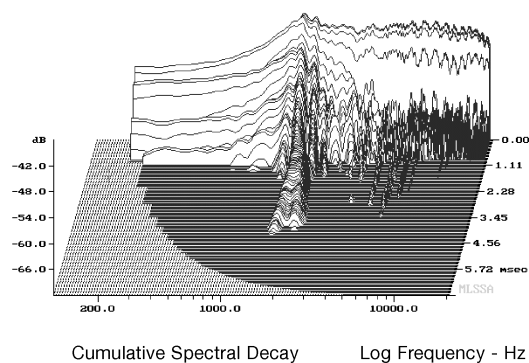

## SPECIFICATIONS

Technical characteristics	Symbol	Value	Units
<b>PRIMARY APPLICATION</b>			
Nominal Impedance	Z	4	Ω
Resonance Frequency	Fs	1610	Hz
Nominal Power Handling	P	40	W
Sensitivity (2,83 V - 1m)	E	91	dB
<b>VOICE COIL</b>			
Voice Coil Diameter	$\phi$	20	mm
Minimum Impedance	Zmin	3,4	Ω
DC Resistance	Dcr	3,1	Ω
Voice Coil Inductance	Lbm	0,01	mH
Voice Coil Length	h	1,7	mm
Former	-	Aluminium	-
Number of Layers	n	2	-
Wire type	-	round	-
Wire material	-	Aluminium	-

## MAGNET

Magnet Dimensions	$\phi$ x h	20 x 0,4	mm
Magnet Weight	m	8,9	g
Flux Density	B	1	T
Force Factor	BL	-	NA <sup>-1</sup>
Height of Magnetic Gap	He	0,2	mm
Stray Flux	Fmag	-	Am <sup>-1</sup>
Linear Excursion	Xmax	± 0,15	mm

## PARAMETERS

Suspension Compliance	Cms	-	μm/N
Mechanical Q Factor	Qms	2,75	-
Electrical Q Factor	Qes	3,23	-
Total Q Factor	Qts	1,48	-
Mechanical Resistance	Rms	-	kg s <sup>-1</sup>
Moving Mass	Mms	-	g
Effective Piston Area	S	4,91	cm <sup>2</sup>
Volume Equivalent of Air at Cas	Vas	-	liters
Mass of Speaker	M	50	g

## Suggested Application

Crossover Frequency	Slope	Inductance	Capacitor	Power Handling
Hz	dB / Oct.	mH	mF	W
5500	6	-	8,2	40
2600	12	0,3	12	40