

ME 65

Microphones | Back-Electret Microphone Head Suitable for K6 and K6P Powering Modules

Cat. No. 003283

General Description

The ME 65 is a super-cardioid microphone head designed for use with the K6 and K6P powering modules. It is especially suited to vocal and speech applications. Matt black, anodised, scratch-resistant finish.



Pictured with K6 powering module and cable (available separately)

Features

- Super-cardioid pick-up pattern
- Excellent directivity across whole frequency range
- Frequency-independent directivity ensures excellent feedback rejection
- Extremely high maximum sound pressure level
- High sensitivity
- Wide frequency range
- Integral pop filter
- Delivery includes: 1 ME 65



Recommended Accessories

- MZW 65 pro foam windshield

Cat. No. 003757

Technical Data

Pick-up pattern	super-cardioid
Frequency response	40 – 20,000 Hz \pm 2.5 dB
Sensitivity (free field, no load) (1 kHz)	10 mV/Pa \pm 2.5 dB
Nominal impedance	200 Ω (with K6)
Min. terminating impedance	1 k Ω (with K6)
Equivalent noise level	
A-weighted (DIN IEC 651)	20 dB
CCIR-weighted (CCIR 468-3)	30 dB
Max. SPL (1 kHz)	142 dB (THD = 3 %)
Dimensions	\varnothing 44 x 131 mm
Weight	80 g

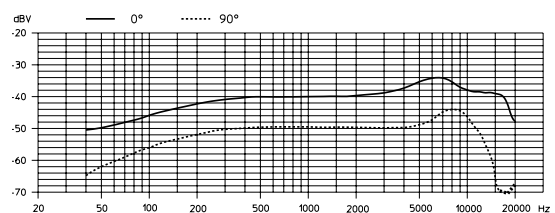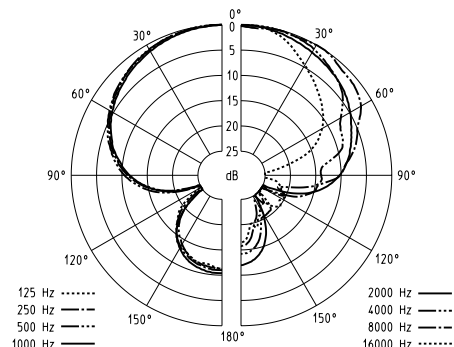

Profile

Super-cardioid microphone head suitable for K6 and K6P powering modules. Frequency response 40 Hz – 20,000 Hz \pm 2.5 dB, sensitivity (free field, no load) 10 mV/Pa \pm 2.5 dB at 1 kHz, nominal impedance 200 Ω (with K6), min. terminating impedance 1 k Ω (with K6), equivalent noise level A-weighted 20 dB, CCIR-weighted 30 dB, max. SPL 142 dB at 1 kHz (THD = 3 %), dimensions \varnothing 44 x 131 mm, weight 80 g.