

S1

Live Performance Condenser Microphone

RØDE[®]

MICROPHONES




Features

- Studio quality live condenser microphone
- Feedback rejecting super-cardioid pick up pattern
- Rugged all metal construction
- Heat treated high-strength head
- Available in satin-nickel (S1) or black (S1-B)
- Low handling noise
- Designed and manufactured in Australia
- Full 10 year warranty*


Specifications

Acoustic Principle	Pressure gradient	Directional Pattern	Super-Cardioid
Frequency Range	20Hz ~ 20,000Hz	Sensitivity	-46dB \pm 2dB re 1V/Pa (5mV @ 94 dB SPL) @ 1kHz
Nominal Impedence	50 Ω	Equivalent Noise	18dBA SPL (A - weighted per IEC651)
Maximum Output	+12.5dBu (@ 1% THD into 1k Ω)	Dynamic Range	132dB (per IEC651)
Maximum SPL	151dB (@ 1kHz, 1% THD into 1k Ω load)	Signal/Noise	75dB SPL (A - weighted per IEC651)
Power Req.	48V Phantom Power	Dimensions	Length - 183mm Diameter - 52mm
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)	Shipping Weight	580g
Net Weight	308g		

Frequency Response

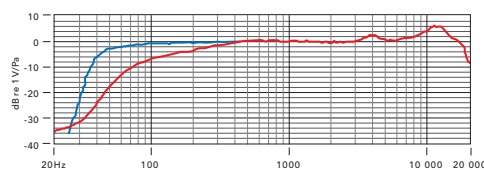

Polar Pattern



Included Accessories

- RM1 stand mount
- ZP1 zip pouch



www.rodemic.com

*After online registration

Australia
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 4189 Santa Barbara CA 93140 USA
Ph: +1 805 566 7777 Fx: +1 805 566 0071