



UNI-AND BIDIRECTIONAL TRANSIENT VOLTAGE SUPPRESSORS

- HIGH SURGE CAPABILITY :
1.5 kW / 1 ms EXPO
- VERY FAST CLAMPING TIME :
1 ps FOR UNIDIRECTIONAL TYPES
5 ns FOR BIDIRECTIONAL TYPES
- LARGE VOLTAGE RANGE :
5.5 V → 188 V
- ORDER CODE :
TYPE NUMBER FOR UNIDIRECTIONAL TYPES, TYPE NUMBER + SUFFIX C FOR BIDIRECTIONAL TYPES



SURFACE MOUNT TRANSIL FEATURES

- A PERFECT PICK AND PLACE BEHAVIOUR
- AN EXCELLENT ON BOARD STABILITY
- A FULL COMPATIBILITY WITH BOTH GLUING AND PASTE SOLDERING TECHNOLOGIES
- BODY MARKED WITH TYPE CODE AND LOGO
- STANDARD PACKAGING : 12 mm TAPE (EIA STD. RS481)
- TINNED COPPER LEADS
- HIGH TEMPERATURE RESISTANT RESIN

DESCRIPTION

Transient voltage suppressor diodes especially useful in protecting integrated circuits, MOS, hybrids and other voltage-sensitive semiconductors and components.


ABSOLUTE RATINGS (limiting values)

| Symbol | Parameter | | Value | Unit |
|--------------------|--|--------------------------------------|--------------------|----------|
| P_p | Peak Pulse Power for 1 ms Exponential Pulse | T_j Initial = 25 °C See note 1 | 1500 | W |
| P | Power Dissipation on Infinite Heatsink | T_{amb} = 25 °C | 1.7 | W |
| I_{FSM} | Non Repetitive Surge Peak Forward Current for Unidirectional Types | T_j Initial = 25 °C t = 10 ms | 150 | A |
| T_{stg} T_j | Storage and Operating Junction Temperature Range | | - 65 to 175 150 | °C °C |
| T_L | Maximum Lead Temperature for Soldering During 10 s | | 260 | °C |

THERMAL RESISTANCE

| Symbol | Parameter | Value | Unit |
|---------------|----------------|-------|------|
| $R_{th(j-l)}$ | Junction-leads | 10 | °C/W |

Note : 1. For surges upper than the maximum values, the diode will present a short-circuit anode-cathode.

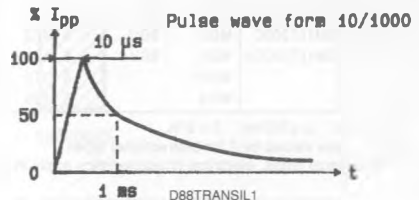

ELECTRICAL CHARACTERISTICS ($T_j = 25\text{ }^\circ\text{C}$)

| Symbol | Parameter | Value | |
|----------------|---------------------------------------|----------------------|-----------|
| V_{RM} | Stand-off Voltage | See tables | |
| $V_{(BR)}$ | Breakdown Voltage | | |
| $V_{(CL)}$ | Clamping Voltage | | |
| I_{pp} | Peak Pulse Current | | |
| α_T | Temperature Coefficient of $V_{(BR)}$ | | |
| C | Capacitance | | |
| $t_{clamping}$ | Clamping Time (0 volt to $V_{(BR)}$) | Unidirectional Types | 1 ps max. |
| | | Bidirectional Types | 5 ns max. |


| Types | | Marking | | I_{RM} @ V_{RM} max. | | $V_{(BR)}$ * @ I_R | | | $V_{(CL)}$ @ I_{pp} max. | | $V_{(CL)}$ @ I_{pp} max. | | α_T max. | C** typ. $V_{R=0}$ $f=1\text{MHz}$ | |
|----------------|---------------|----------------|---------------|--------------------------|------|----------------------|------|------|----------------------------|------|----------------------------|------|-----------------|------------------------------------|------|
| Unidirectional | Bidirectional | Unidirectional | Bidirectional | (μA) | (V) | min. | nom. | max. | (mA) | (V) | (A) | (V) | (A) | ($10^{-4}/^\circ\text{C}$) | (pF) |
| | | | | | | | | | 1ms expo | | 8-20 μs expo | | | | |
| SM15T6V8 | SM15T6V8C | MDD | BDD | 1000 | 5.5 | 6.12 | 6.8 | 7.48 | 10 | 10.8 | 139 | 14 | 714 | 5.7 | 9500 |
| SM15T6V8A | SM15T6V8CA | MDE | BDE | 1000 | 5.8 | 6.45 | 6.8 | 7.14 | 10 | 10.5 | 143 | 13.4 | 746 | 5.7 | 9500 |
| SM15T7V5 | SM15T7V5C | MDF | BDF | 1000 | 6.05 | 6.75 | 7.5 | 8.25 | 10 | 11.7 | 128 | 15.2 | 660 | 6.1 | 8500 |
| SM15T7V5A | SM15T7V5CA | MDF | BDF | 1000 | 6.4 | 7.13 | 7.5 | 7.88 | 10 | 11.3 | 132 | 14.5 | 690 | 6.1 | 8500 |
| SM15T10 | SM15T10C | MDN | BDN | 10 | 8.1 | 9.0 | 10 | 11 | 1 | 15 | 100 | 19.5 | 928 | 7.3 | 7000 |
| SM15T10A | SM15T10CA | MDP | BDP | 10 | 8.55 | 9.5 | 10 | 10.5 | 1 | 14.5 | 103 | 18.6 | 968 | 7.3 | 7000 |
| SM15T12 | SM15T12C | MDS | BDS | 5 | 9.72 | 10.8 | 12 | 13.2 | 1 | 17.3 | 87 | 22.7 | 793 | 7.8 | 6000 |
| SM15T12A | SM15T12CA | MDT | BDT | 5 | 10.2 | 11.4 | 12 | 12.6 | 1 | 16.7 | 90 | 21.7 | 829 | 7.8 | 6000 |
| SM15T15 | SM15T15C | MDW | BDW | 5 | 12.1 | 13.5 | 15 | 16.5 | 1 | 22 | 68 | 28.4 | 634 | 8.4 | 5000 |
| SM15T15A | SM15T15CA | MDX | BDX | 5 | 12.8 | 14.3 | 15 | 15.8 | 1 | 21.2 | 71 | 27.2 | 662 | 8.4 | 5000 |
| SM15T18 | SM15T18C | MED | BED | 5 | 14.5 | 16.2 | 18 | 19.8 | 1 | 26.5 | 56.5 | 34 | 529 | 8.8 | 4300 |
| SM15T18A | SM15T18CA | MEE | BEE | 5 | 15.3 | 17.1 | 18 | 18.9 | 1 | 25.2 | 59.5 | 32.5 | 554 | 8.8 | 4300 |
| SM15T22 | SM15T22C | MEH | BEH | 5 | 17.8 | 19.8 | 22 | 24.2 | 1 | 31.9 | 47 | 41.2 | 437 | 9.2 | 3700 |
| SM15T22A | SM15T22CA | MEK | BEK | 5 | 18.8 | 20.9 | 22 | 23.1 | 1 | 30.6 | 49 | 39.3 | 458 | 9.2 | 3700 |
| SM15T24 | SM15T24C | MEL | BEL | 5 | 19.4 | 21.6 | 24 | 26.4 | 1 | 34.7 | 43 | 44.9 | 401 | 9.4 | 3500 |
| SM15T24A | SM15T24CA | MEM | BEM | 5 | 20.5 | 22.8 | 24 | 25.2 | 1 | 33.2 | 45 | 42.8 | 421 | 9.4 | 3500 |
| SM15T27 | SM15T27C | MEN | BEN | 5 | 21.8 | 24.3 | 27 | 29.7 | 1 | 39.1 | 38.5 | 50.5 | 356 | 9.6 | 3200 |
| SM15T27A | SM15T27CA | MEP | BEP | 5 | 23.1 | 25.7 | 27 | 28.4 | 1 | 37.5 | 40 | 48.3 | 373 | 9.6 | 3200 |
| SM15T30 | SM15T30C | MEQ | BEQ | 5 | 24.3 | 27 | 30 | 33 | 1 | 43.5 | 34.5 | 56.1 | 321 | 9.7 | 2900 |
| SM15T30A | SM15T30CA | MER | BER | 5 | 25.6 | 28.5 | 30 | 31.5 | 1 | 41.4 | 36 | 53.5 | 336 | 9.7 | 2900 |
| SM15T33 | SM15T33C | MES | BES | 5 | 26.8 | 29.7 | 33 | 36.3 | 1 | 47.7 | 31.5 | 61.5 | 292 | 9.8 | 2700 |
| SM15T33A | SM15T33CA | MET | BET | 5 | 28.2 | 31.4 | 33 | 34.7 | 1 | 45.7 | 33 | 59 | 305 | 9.8 | 2700 |
| SM15T36 | SM15T36C | MEU | BEU | 5 | 29.1 | 32.4 | 36 | 39.6 | 1 | 52 | 29 | 67.3 | 267 | 9.9 | 2500 |
| SM15T36A | SM15T36CA | MEV | BEV | 5 | 30.8 | 34.2 | 36 | 37.8 | 1 | 49.9 | 30 | 64.3 | 280 | 9.9 | 2500 |
| SM15T39 | SM15T39C | MEW | BEW | 5 | 31.6 | 35.1 | 39 | 42.9 | 1 | 56.4 | 26.5 | 73 | 246 | 10.0 | 2400 |
| SM15T39A | SM15T39CA | MEX | BEX | 5 | 33.3 | 37.1 | 39 | 41 | 1 | 53.9 | 28 | 69.7 | 258 | 10.0 | 2400 |
| SM15T68 | SM15T68C | MFN | BFN | 5 | 55.1 | 61.2 | 68 | 74.8 | 1 | 98 | 15.3 | 127 | 142 | 10.4 | 1550 |
| SM15T68A | SM15T68CA | MFP | BFP | 5 | 58.1 | 64.6 | 68 | 71.4 | 1 | 92 | 16.3 | 121 | 148 | 10.4 | 1550 |
| SM15T100 | SM15T100C | MFW | BFW | 5 | 81 | 90 | 100 | 110 | 1 | 144 | 10.4 | 187 | 96 | 10.6 | 1150 |
| SM15T100A | SM15T100CA | MFX | BFX | 5 | 85.5 | 95 | 100 | 105 | 1 | 137 | 11 | 178 | 101 | 10.6 | 1150 |
| SM15T150 | SM15T150C | MGH | BGH | 5 | 121 | 135 | 150 | 165 | 1 | 215 | 7 | 277 | 65 | 10.8 | 850 |
| SM15T150A | SM15T150CA | MGK | BGK | 5 | 128 | 143 | 150 | 158 | 1 | 207 | 7.2 | 265 | 68 | 10.8 | 850 |
| SM15T200 | SM15T200C | MGU | BGU | 5 | 162 | 180 | 200 | 220 | 1 | 287 | 5.2 | 370 | 48.5 | 10.8 | 675 |
| SM15T200A | SM15T200CA | MGV | BGV | 5 | 171 | 190 | 200 | 210 | 1 | 274 | 5.5 | 353 | 51 | 10.8 | 675 |
| SM15T220 | | MGW | | 5 | 175 | 198 | 220 | 242 | 1 | 344 | 4.3 | 406 | 44.5 | 10.8 | 625 |
| SM15T220A | | MGX | | 5 | 185 | 209 | 220 | 231 | 1 | 328 | 4.6 | 388 | 46.5 | 10.8 | 625 |

* Pulse test $t_p \leq 50\text{ ms}$ $\delta < 2\%$.

** Divide these values by 2 for bidirectional types.


For bidirectional types, electrical characteristics apply in both directions.

ORDER CODE

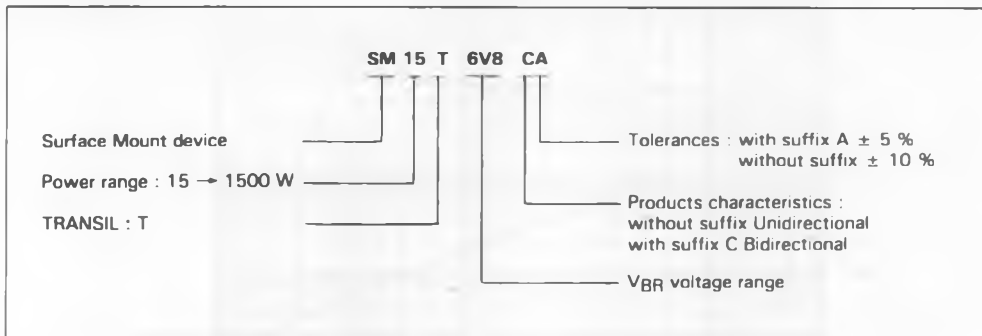

PACKAGE MECHANICAL DATA


SOD 15 Plastic

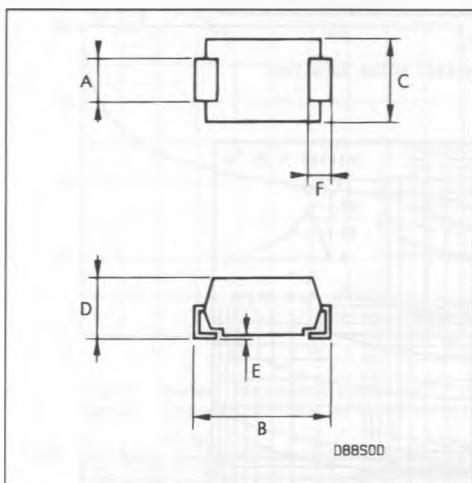

| Ref. | Millimetres | | Inches | |
|------|-------------|------|--------|-------|
| | Min. | Max. | Min. | Max. |
| A | 2.8 | 3.2 | 0.110 | 0.126 |
| B | 7.6 | 8.0 | 0.300 | 0.315 |
| C | 4.8 | 5.2 | 0.190 | 0.200 |
| D | 2.5 | 3.1 | 0.098 | 0.122 |
| E | — | 0.1 | — | 0.004 |
| F | 1.3 | 1.7 | 0.051 | 0.067 |

Laser marking.
The logo indicates cathode for unidirectional types.

FOOT PRINT DIMENSIONS (Millimeters)

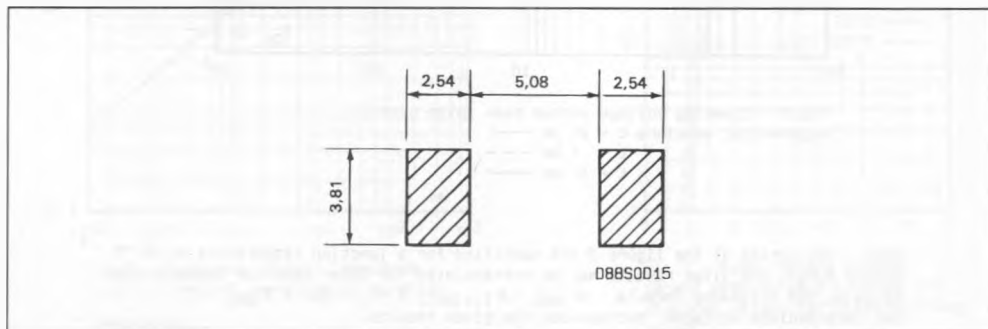

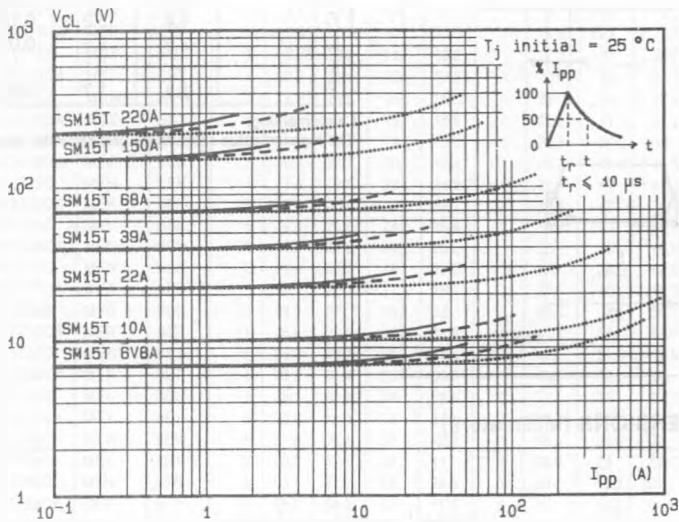
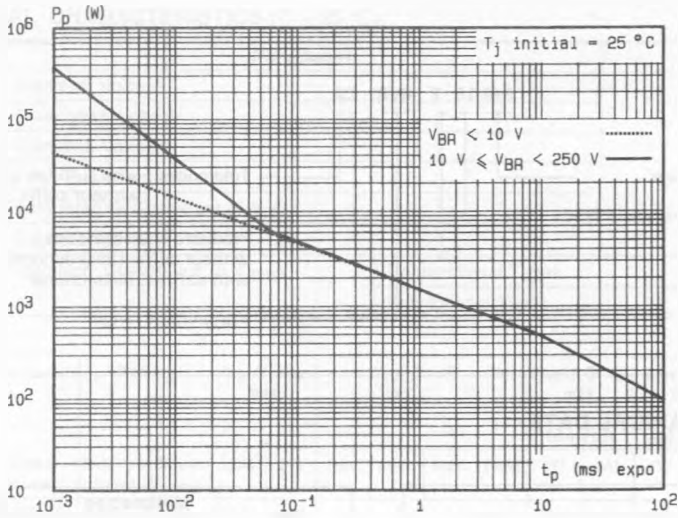


Fig. 2 - Clamping voltage versus peak pulse current.
 exponential waveform $t = 20 \mu s$
 $t = 1 ms$ ----
 $t = 10 ms$ ———

Note : The curves of the figure 2 are specified for a junction temperature of 25 °C before surge. The given results may be extrapolated for other junction temperatures by using the following formula : $\Delta V(BR) = \alpha_T (V(BR)) \times [T_j - 25] \times V(BR)$
 For intermediate voltages, extrapolate the given results.

088SM15TP4

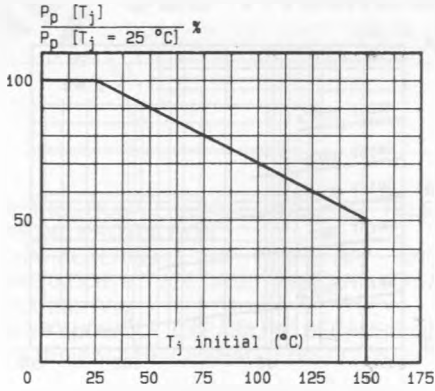


Fig. 3 - Allowable power dissipation versus junction temperature.

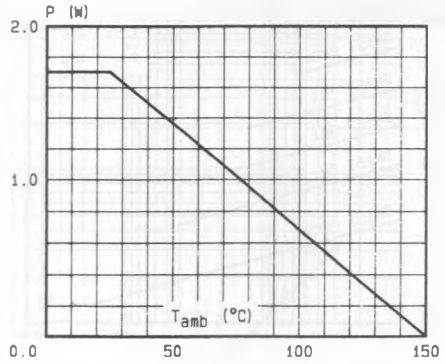


Fig. 4 - Power dissipation versus ambient temperature.

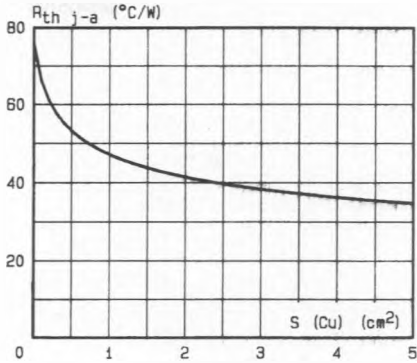


Fig. 5 - Thermal resistance junction-ambient versus Cu surface (printed circuit).

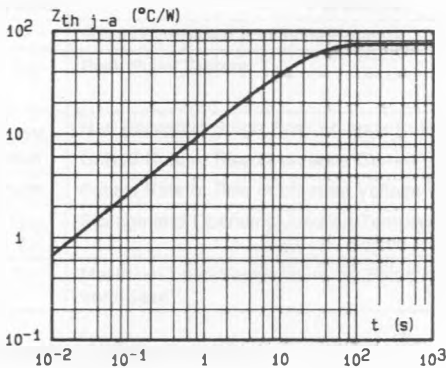


Fig. 6 - Transient thermal impedance junction-ambient versus pulse duration.

088SM15TP5

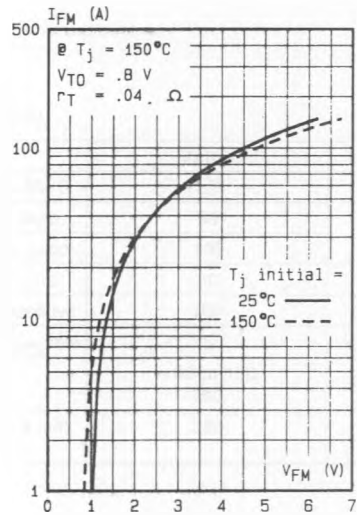


Fig. 7 - Peak forward current versus peak forward voltage drop (typical values for unidirectional types).

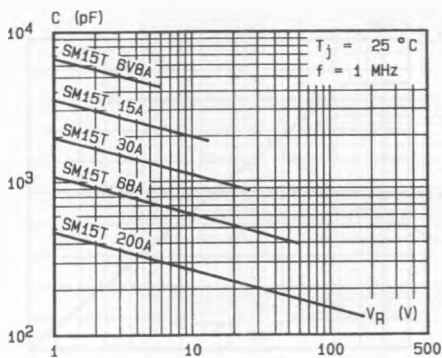


Fig.8a - Capacitance versus reverse applied voltage for unidirectional types (typical values).

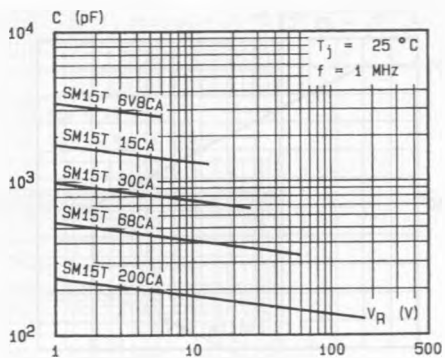


Fig.8b - Capacitance versus reverse applied voltage for bidirectional types (typical values).

088SM15TP6