

N-Channel Mosfet Transistor

MTP7N60

• FEATURES

- Drain Current $-I_D = 7A @ T_C = 25^\circ C$
- Drain Source Voltage-
 : $V_{DSS} = 600V(\text{Min})$
- Static Drain-Source On-Resistance
 : $R_{DS(on)} = 1.0 \Omega (\text{Max})$
- Avalanche Energy Specified
- Fast Switching
- Simple Drive Requirements

• DESCRIPTION



- Designed for high efficiency switch mode power supply.

• ABSOLUTE MAXIMUM RATINGS($T_a = 25^\circ C$)


SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage	600	V
V_{GS}	Gate-Source Voltage-Continuous	± 20	V
I_D	Drain Current-Continuous	7	A
I_{DM}	Drain Current-Single Pulsed	28	A
P_D	Total Dissipation @ $T_C = 25^\circ C$	125	W
T_j	Max. Operating Junction Temperature	150	$^\circ C$
T_{stg}	Storage Temperature	-55~150	$^\circ C$

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th(j-c)}$	Thermal Resistance, Junction to Case	1.0	$^\circ C/W$
$R_{th(j-a)}$	Thermal Resistance, Junction to Ambient	62.5	$^\circ C/W$

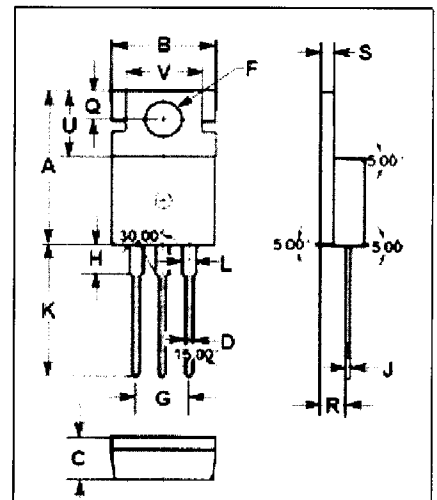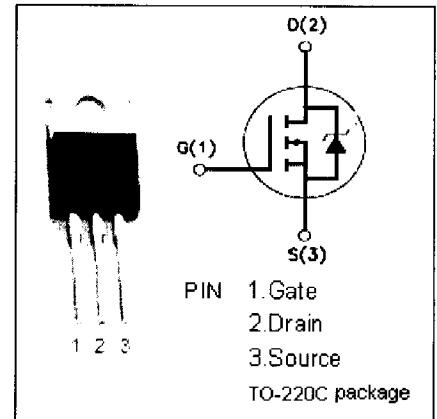

DIM	mm	
	MIN	MAX
A	15.70	15.90
B	9.90	10.10
C	4.20	4.40
D	0.70	0.90
F	3.40	3.60
G	4.98	5.18
H	2.70	2.90
J	0.44	0.46
K	13.20	13.40
L	1.10	1.30
Q	2.70	2.90
R	2.50	2.70
S	1.29	1.31
U	6.45	6.65
V	8.66	8.86



ELECTRICAL CHARACTERISTICS

$T_c=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0; I_D=0.25\text{mA}$	600		V
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}; I_D=0.25\text{mA}$	2	4	V
$R_{DS(on)}$	Drain-Source On-Resistance	$V_{GS}=10\text{V}; I_D=3.5\text{A}$		1.0	Ω
I_{GSS}	Gate-Body Leakage Current	$V_{GS}=\pm 20\text{V}; V_{DS}=0$		± 100	nA
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=600\text{V}; V_{GS}=0$		1	μA
V_{SD}	Forward On-Voltage	$I_S=7\text{A}; V_{GS}=0$		1.8	V