





N-Channel 20-V (D-S) MOSFET

TrenchFET[®]
Power MOSFETS
2.5-V Rated

PRODUCT SUMMARY		
V _{DS} (V)	r _{DS(on)} (Ω)	I _D (A)
20	0.150 @ V _{GS} = 4.5 V	1.7
	0.235 @ V _{GS} = 2.5 V	1.3



ABSOLUTE MAXIMUM RATINGS (T _A = 25°C UNLESS OTHERWISE NOTED)					
Parameter	Symbol	5 secs	Steady State	Unit	
Drain-Source Voltage	V _{DS}	20		V	
Gate-Source Voltage	V _{GS}	± 12			
Continuous Drain Current (T _J = 150°C) ^a	I _D	T _A = 25°C	1.7	1.6	A
		T _A = 85°C	1.2	1.0	
Pulsed Drain Current	I _{DM}	1.0			
Continuous Source Current (Diode Conduction) ^a	I _S	0.8	0.8		
Maximum Power Dissipation ^a	P _D	T _A = 25°C	0.625	0.568	W
		T _A = 85°C	0.40	0.295	
Operating Junction and Storage Temperature Range	T _J , T _{stg}	-55 to 150		°C	

THERMAL RESISTANCE RATINGS					
Parameter	Symbol	Typical	Maximum	Unit	
Maximum Junction-to-Ambient ^a	R _{thJA}	t ≤ 5 sec	165	200	°C/W
		Steady State	180	220	
Maximum Junction-to-Foot (Drain)	R _{thJF}	105	130		

Notes
a. Surface Mounted on 1" x 1" FR4 Board.





SPECIFICATIONS (T_J = 25 °C UNLESS OTHERWISE NOTED)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250 μA	0.6			V
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ± 12 V			± 100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 16 V, V _{GS} = 0 V			1	μA
		V _{DS} = 16 V, V _{GS} = 0 V, T _J = 85 °C			5	
On-State Drain Current ^a	I _{D(on)}	V _{DS} ≥ 5 V, V _{GS} = 4.5 V	2			A
Drain-Source On-State Resistance ^a	r _{DS(on)}	V _{GS} = 4.5 V, I _D = 1.7 A		0.123	0.150	Ω
		V _{GS} = 2.5 V, I _D = 1.3 A		0.195	0.235	
Forward Transconductance ^a	g _{fs}	V _{DS} = 10 V, I _D = 1.7 A		5		S
Diode Forward Voltage ^a	V _{SD}	I _S = 0.8 A, V _{GS} = 0 V		0.78	1.1	V
Dynamic^b						
Total Gate Charge	Q _g	V _{DS} = 10 V, V _{GS} = 4.5 V, I _D = 1.7 A		2.1	4.0	nC
Gate-Source Charge	Q _{gs}			0.3		
Gate-Drain Charge	Q _{gd}			0.4		
Turn-On Delay Time	t _{d(on)}	V _{DD} = 10 V, R _L = 20 Ω I _D ≅ 1 A, V _{GEN} = 4.5 V, R _G = 6 Ω		10	17	ns
Rise Time	t _r			30	50	
Turn-Off Delay Time	t _{d(off)}			14	25	
Fall Time	t _f			8	15	
Source-Drain Reverse Recovery Time	t _{rr}	I _F = 0.8 A, di/dt = 100 A/μs		30	50	

Notes







- a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.
- b. Guaranteed by design, not subject to production testing.

TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

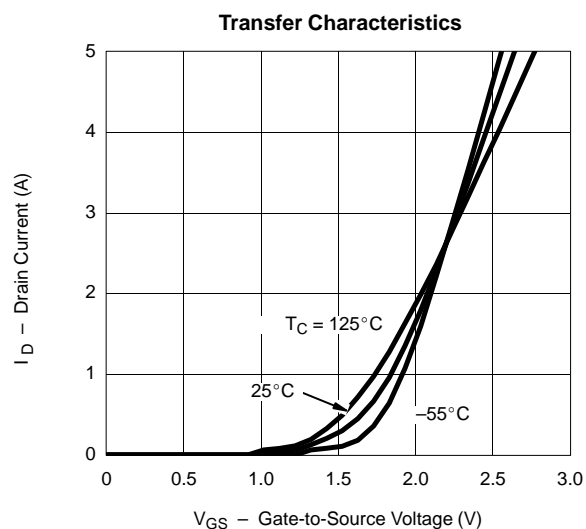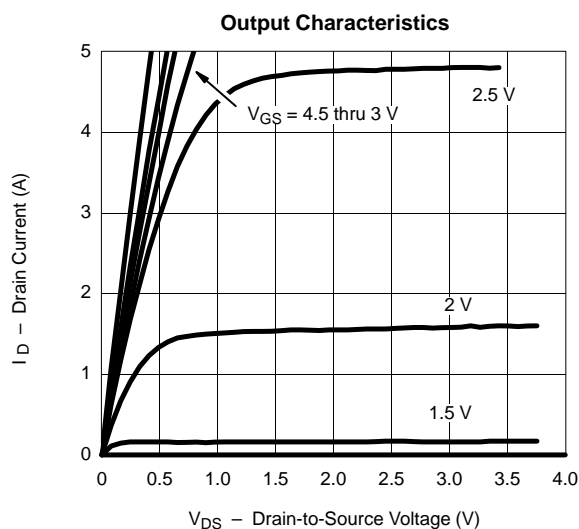



TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

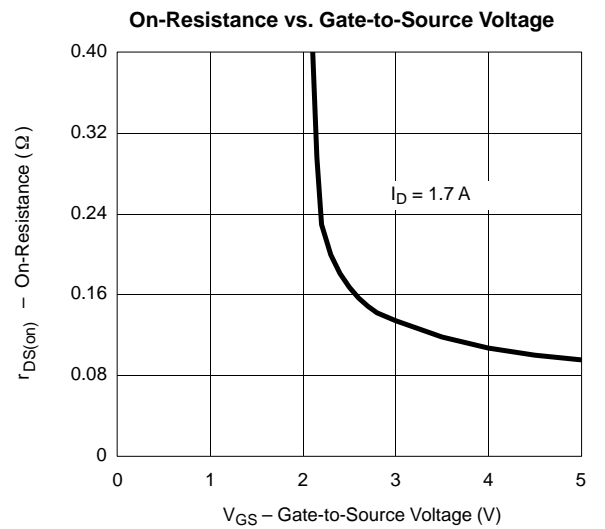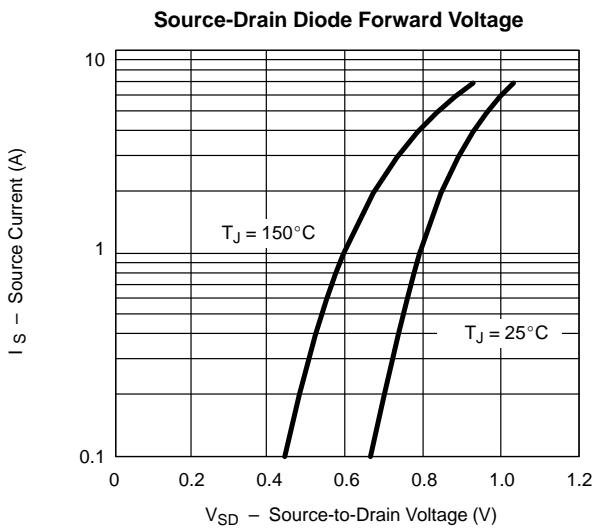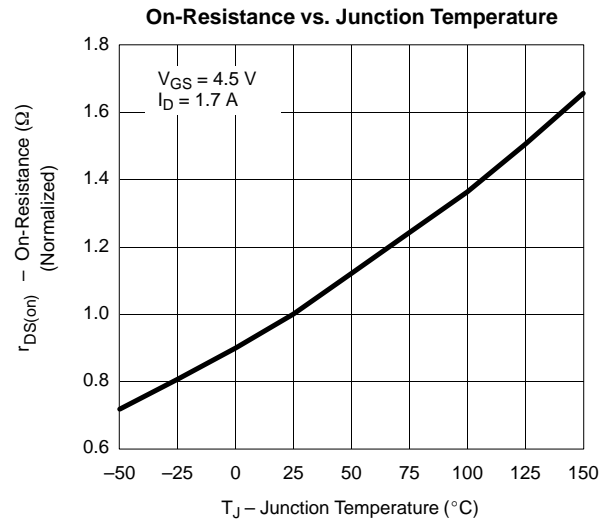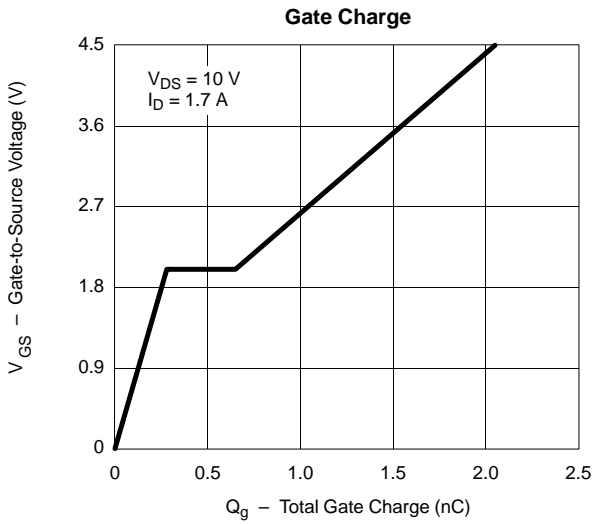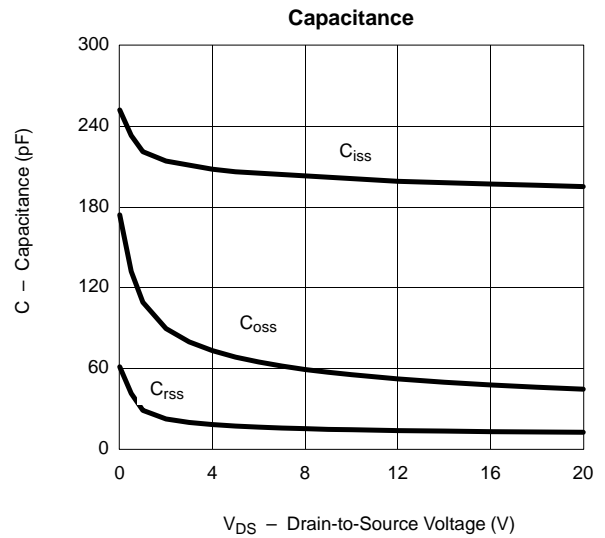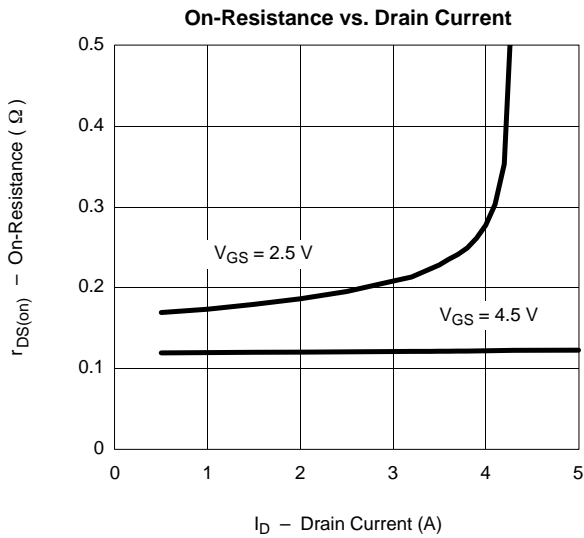



TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

