


# CIRCUIT DIAGRAM FOR COBRA 146GTL

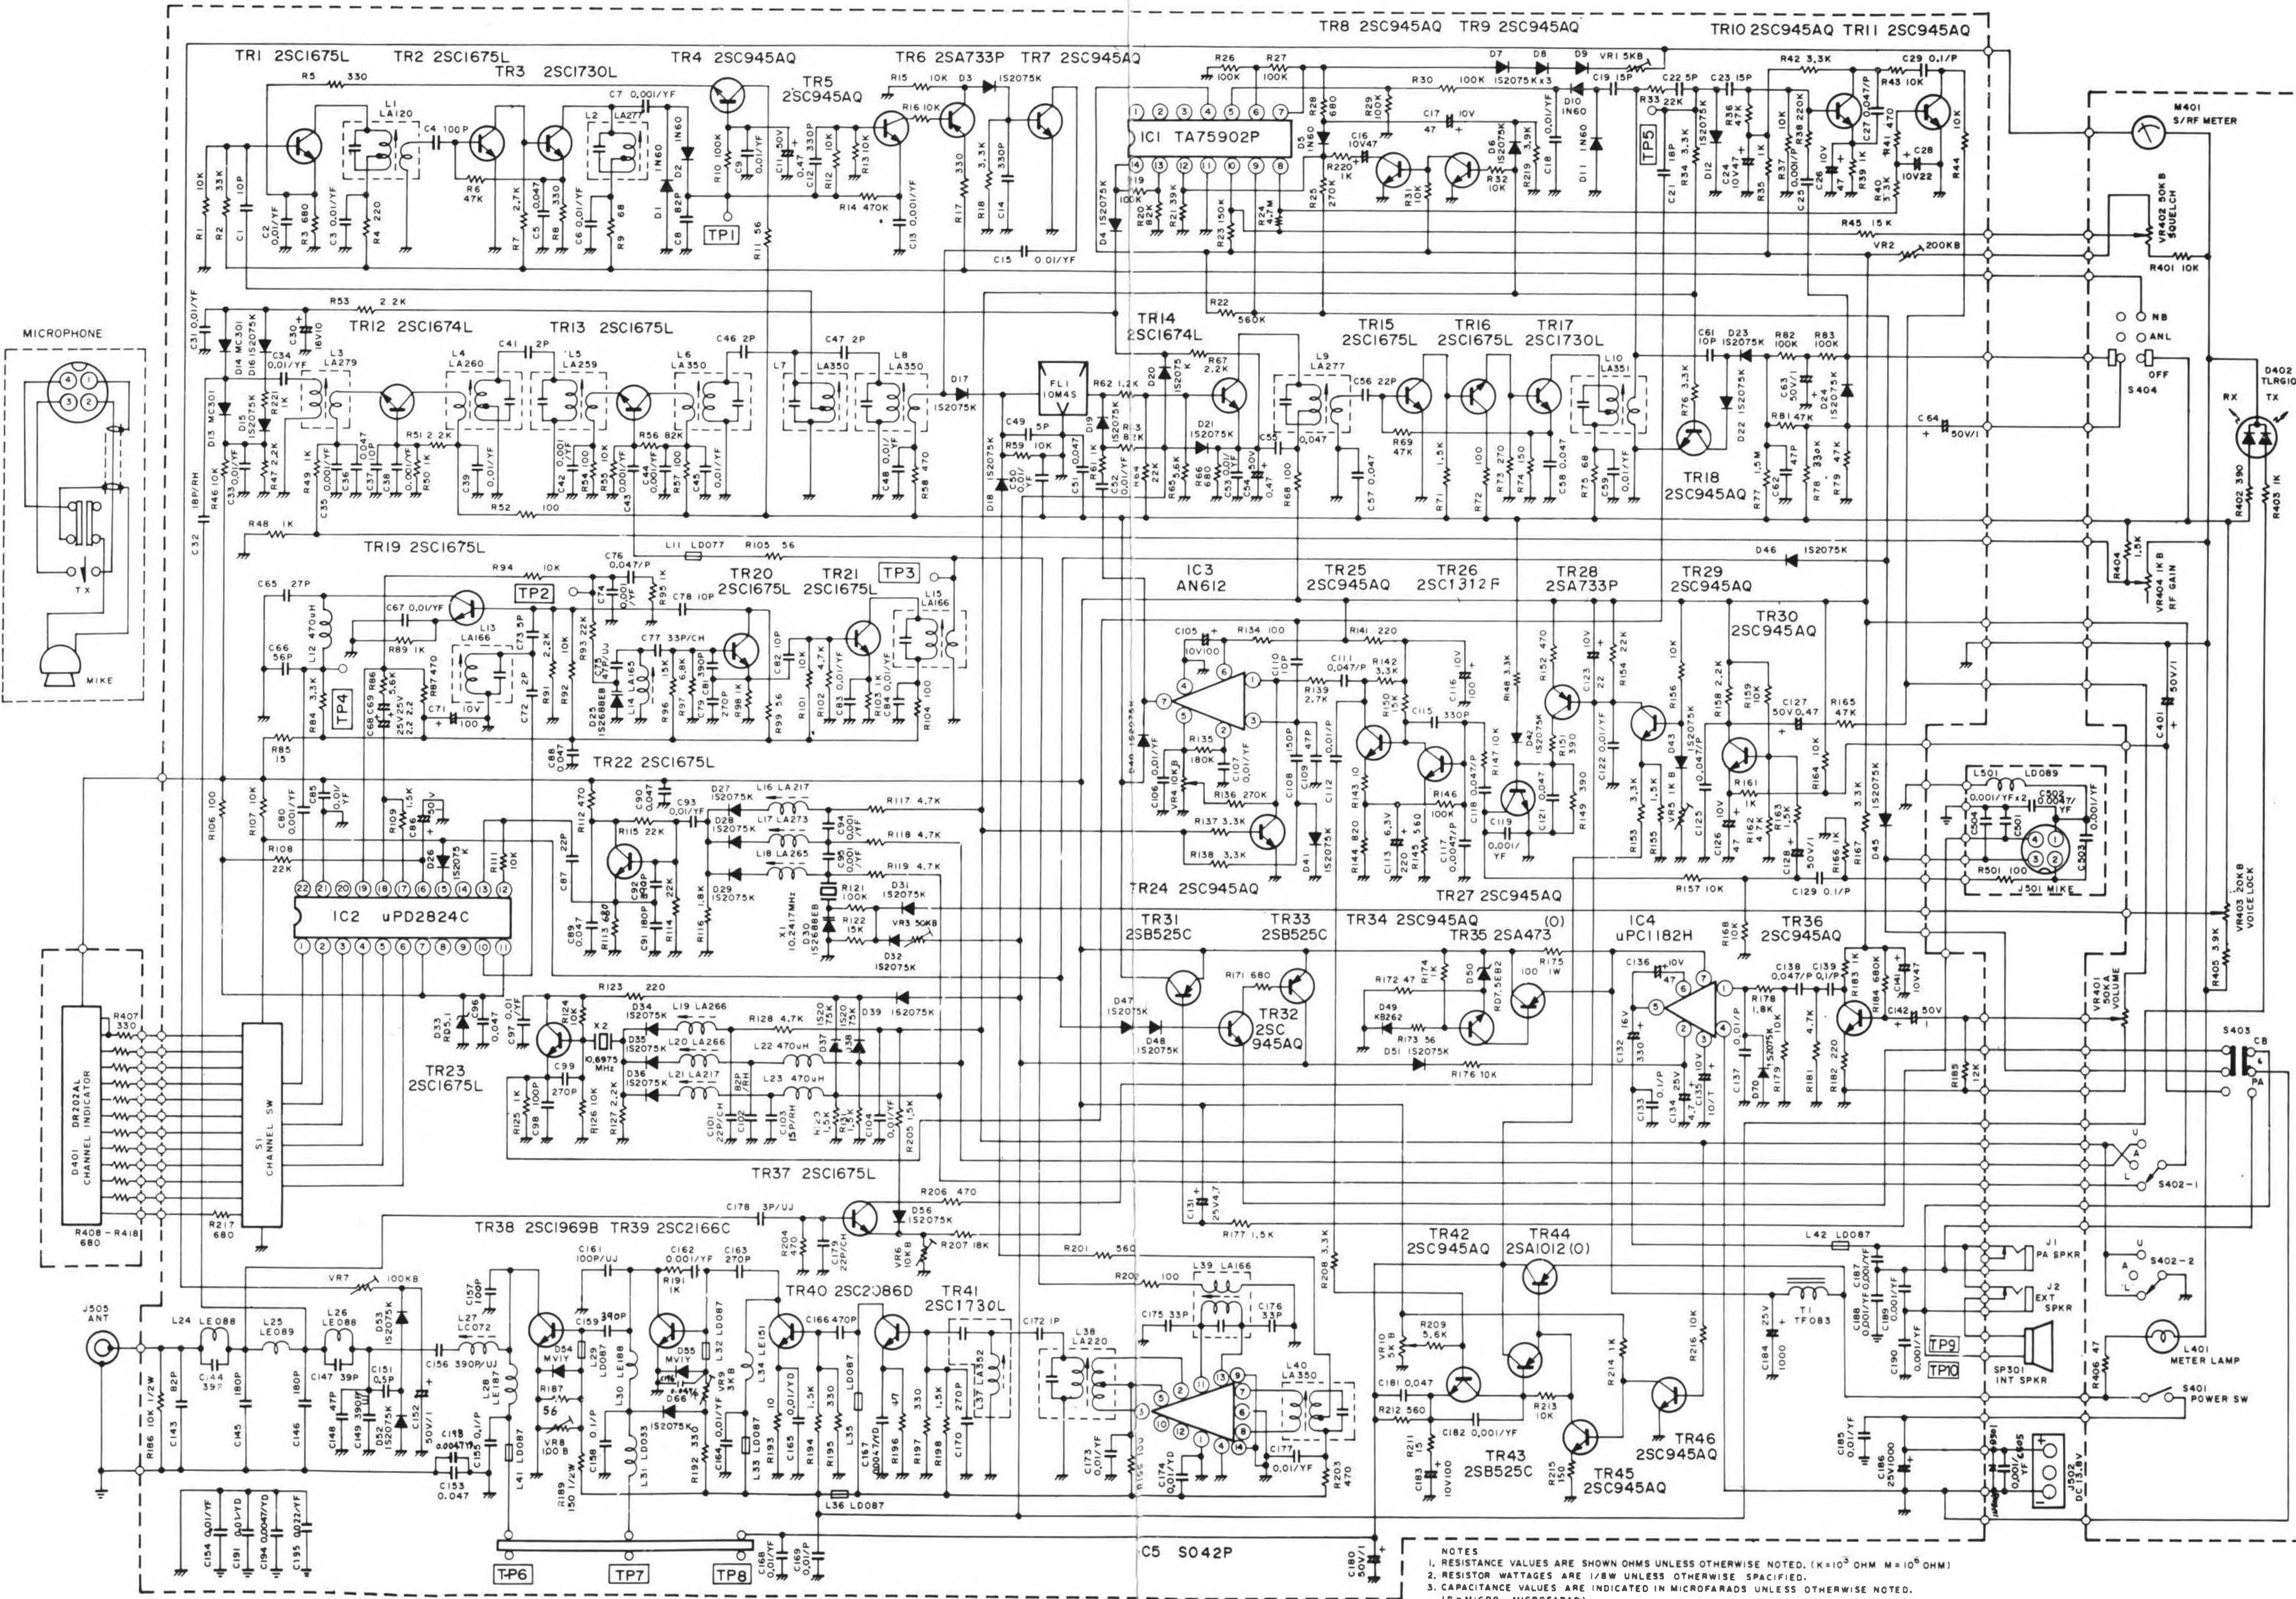

- NOTES**
1. RESISTANCE VALUES ARE SHOWN OHMS UNLESS OTHERWISE NOTED. (K=10<sup>3</sup> OHM M=10<sup>6</sup> OHM)
  2. RESISTOR WATTAGES ARE 1/8W UNLESS OTHERWISE SPECIFIED.
  3. CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE NOTED. (P=MICRO-MICROFARAD)
  4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE 5L (LESS THAN 100PPF) OR 2P (MORE THAN 100PPF) UNLESS OTHERWISE NOTED.