



SCHEMATIC DIAGRAM

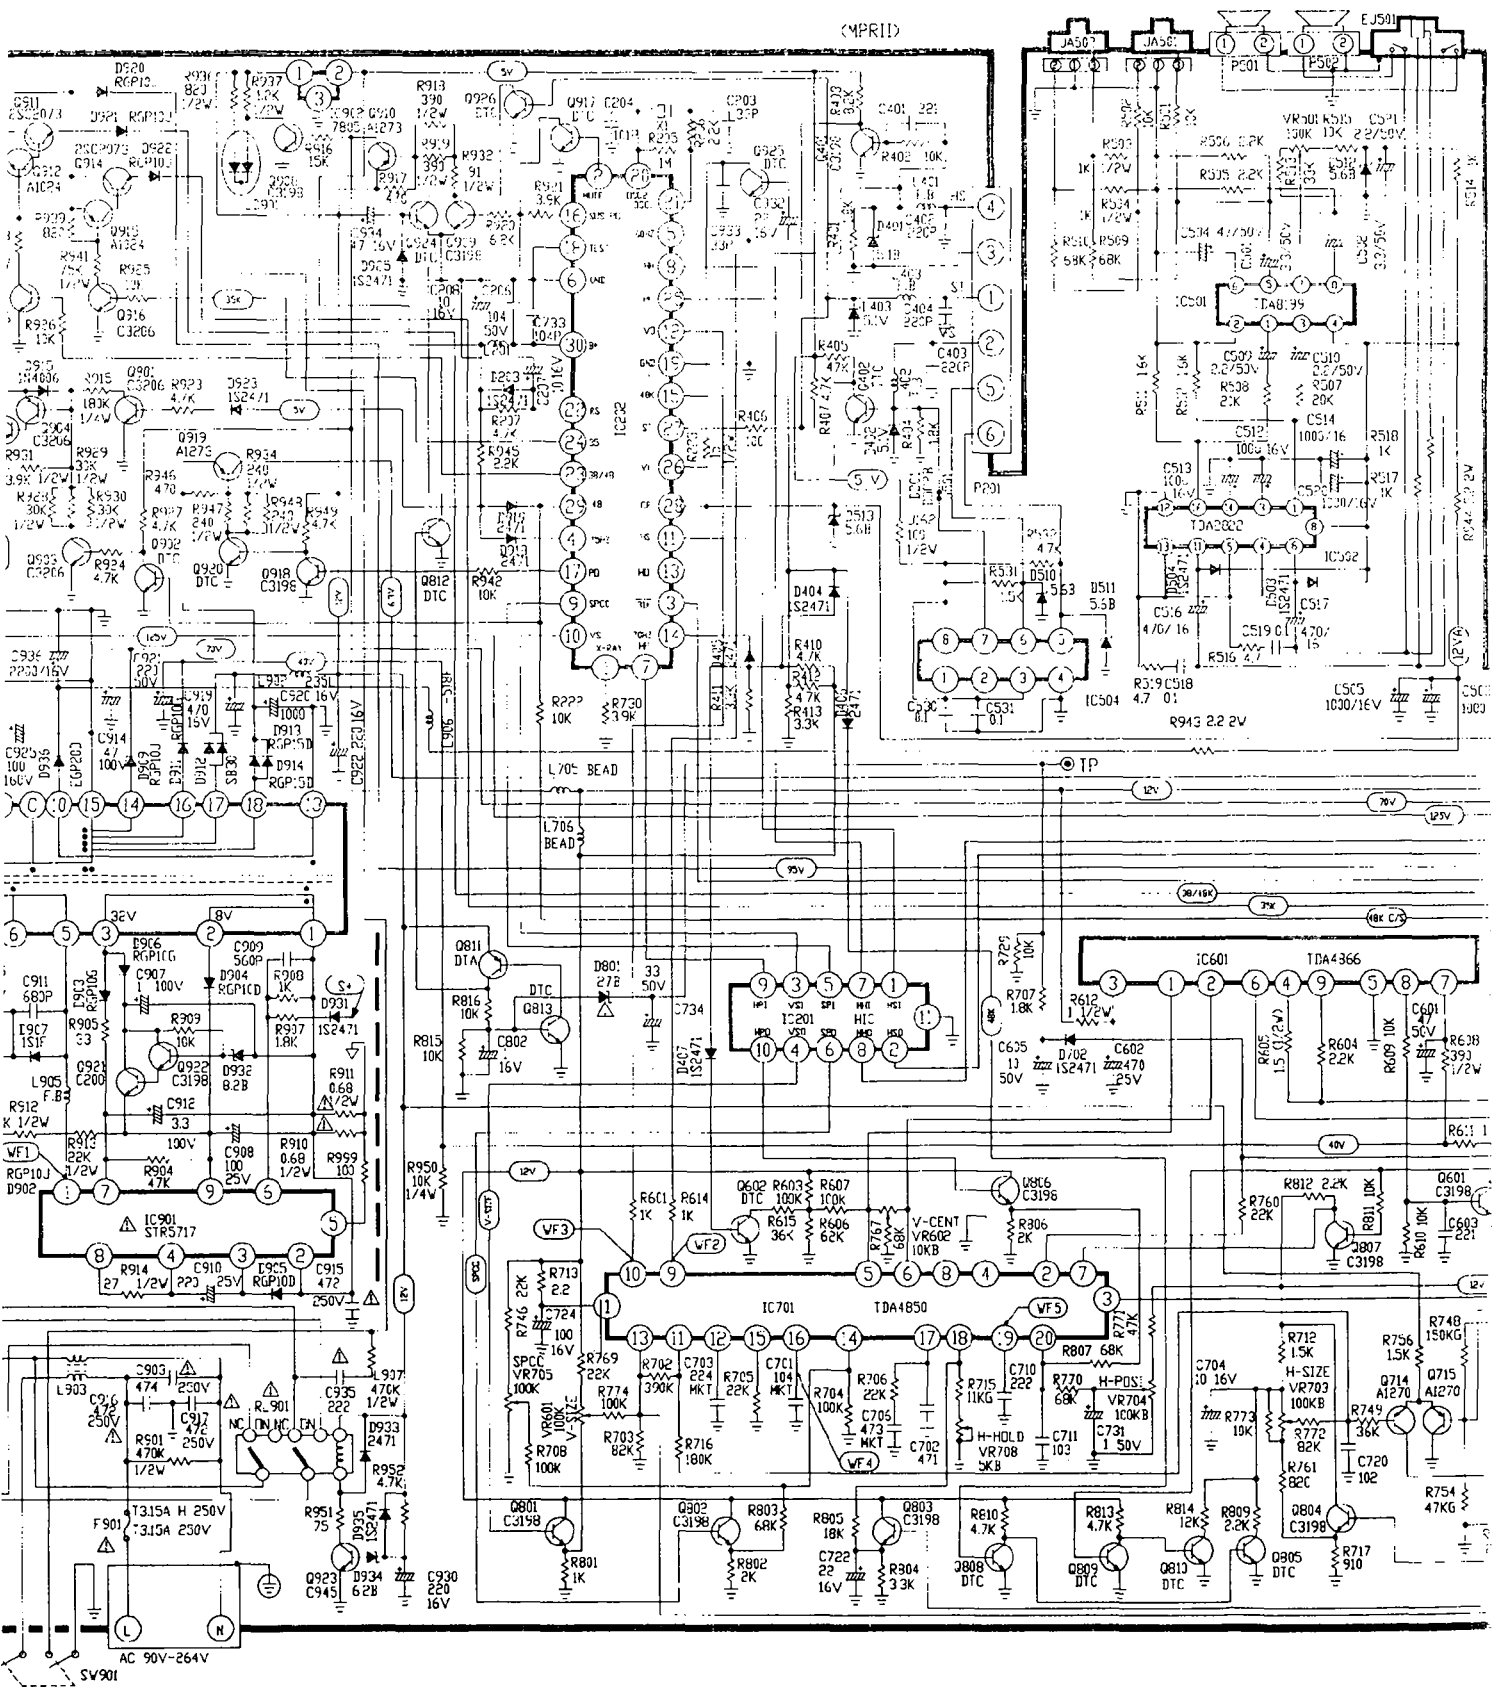

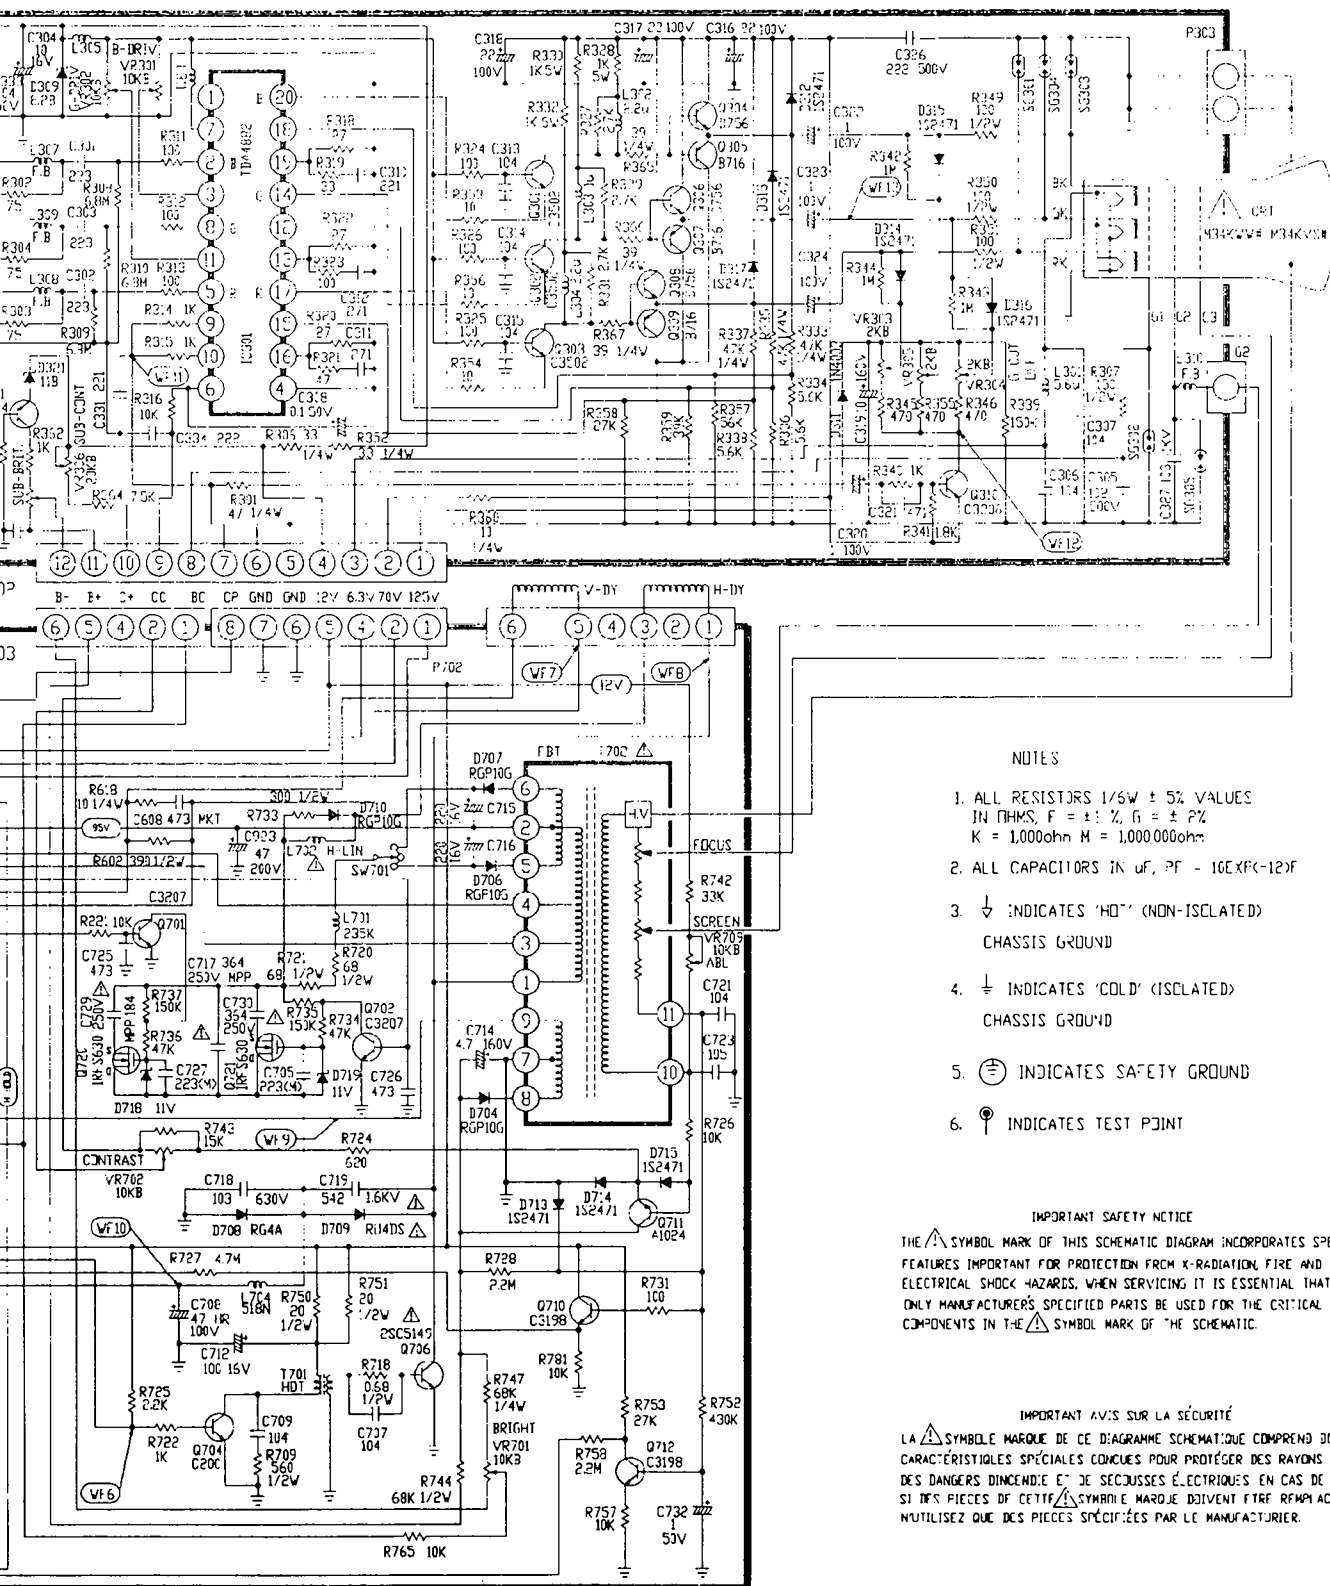

NOTES

1. ALL RESISTORS 1/5W ± 5% VALUES
IN OHMS, F = ± 1%, G = ± 2%
K = 1,000ohm M = 1,000,000ohm
2. ALL CAPACITORS IN uF, PF = 10EXP(-12)F
3. ↓ INDICATES 'HOT' (NON-ISLATED)
CHASSIS GROUND
4. ⊥ INDICATES 'COLD' (ISLATED)
CHASSIS GROUND
5. ⊕ INDICATES SAFETY GROUND
6. ⊙ INDICATES TEST POINT

IMPORTANT SAFETY NOTICE

THE ⚠ SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION FIRE AND ELECTRICAL SHOCK HAZARDS. WHEN SERVICING IT IS ESSENTIAL THAT ONLY MANUFACTURERS SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE ⚠ SYMBOL MARK OF THE SCHEMATIC.

IMPORTANT AVIS SUR LA SÉCURITÉ

LA ⚠ SYMBOLE MARQUE DE CE DIAGRAMME SCHEMATIQUE COMPREND D'IMPORTANTES CARACTÉRISTIQUES SPÉCIALES CONÇUES POUR PROTÉGER DES RAYONS X ET DES DANGERS D'INCENDIE ET DE SECOURSÉS ÉLECTRIQUES EN CAS DE BESOIN SI DES PIÈCES DE CETTE ⚠ SYMBOLE MARQUE DOIVENT ÊTRE REMPLACÉES UTILISEZ QUE DES PIÈCES SPÉCIFIÉES PAR LE MANUFACTURIER.