REMOTE HANDSET

IC103 SAA3010

IC101 PCA84C440

IC102 PCF8581

VIF & SIGNAL PROCESS SECTION

SW13 STANDBY ON/OFF SWITCH

IR101 SBX1610

SW12 ANALOG UP

SW17 ANALOG DOWN

SW22 SEARCH

ST803M

IC301 74LS241

TUU201

TP201

TP209

TP206

XT101 10MHz

XT102 429kHz

VR102

VR201

VR202

VR203

S102

SCART

POWER SUPPLY (SMPS)

HORI. SECTION

VERTICAL OUTPUT

Zapraszam na stronę http://murysz.republika.pl

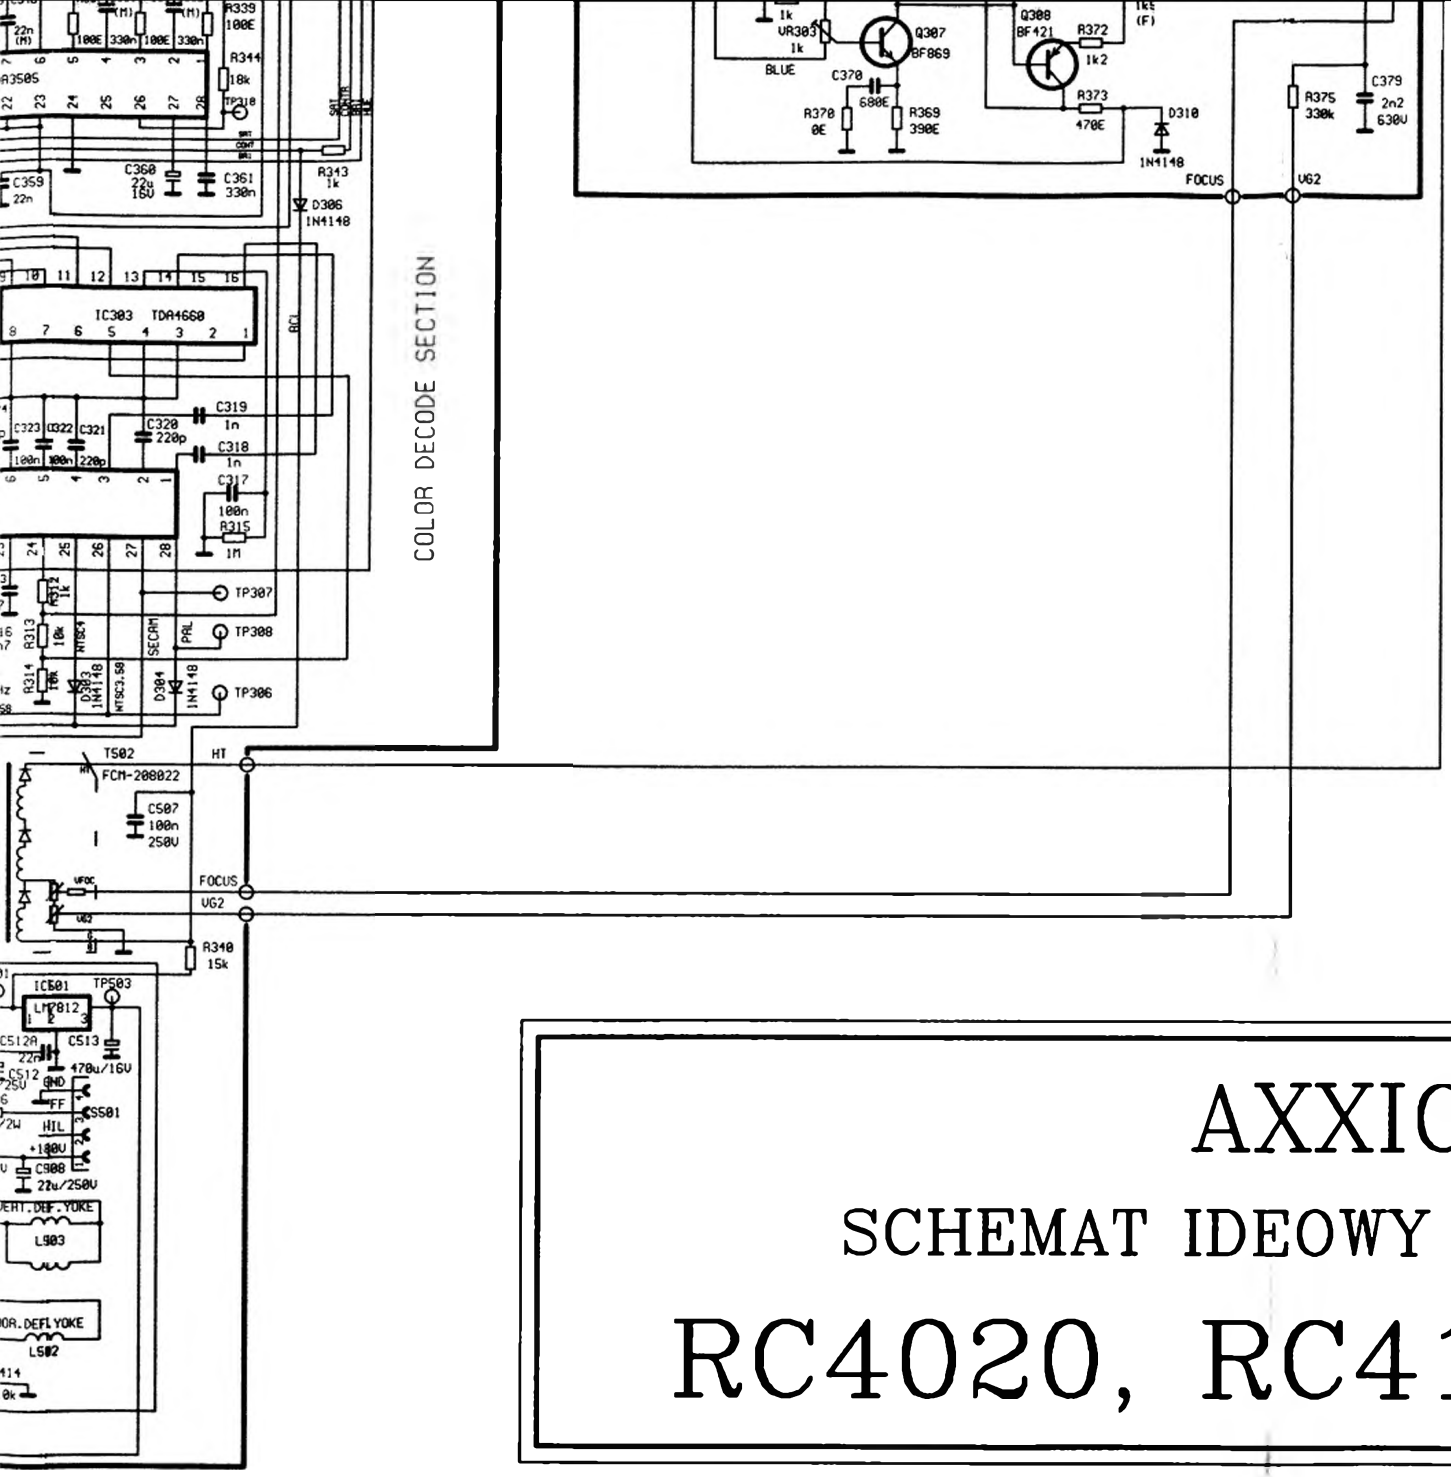

IC101

TUNING STEP DELAY	PIN16	PIN17
40 ms	OFF	ON
52 ms	OFF	OFF
61 ms	ON	OFF
83 ms	ON	ON

"OFF - OPTION DIODE ABSENT"
"ON - OPTION DIODE PRESENT"

AXXION

SCHEMAT IDEOWY OTVC 20", 21"

RC4020, RC4120, RC4021

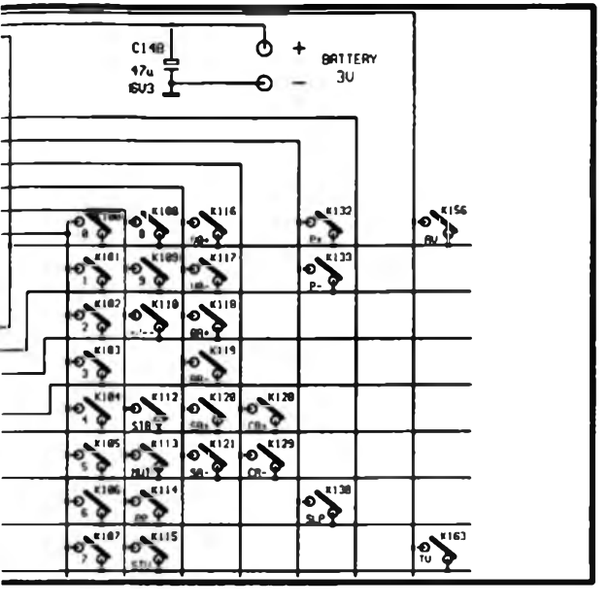

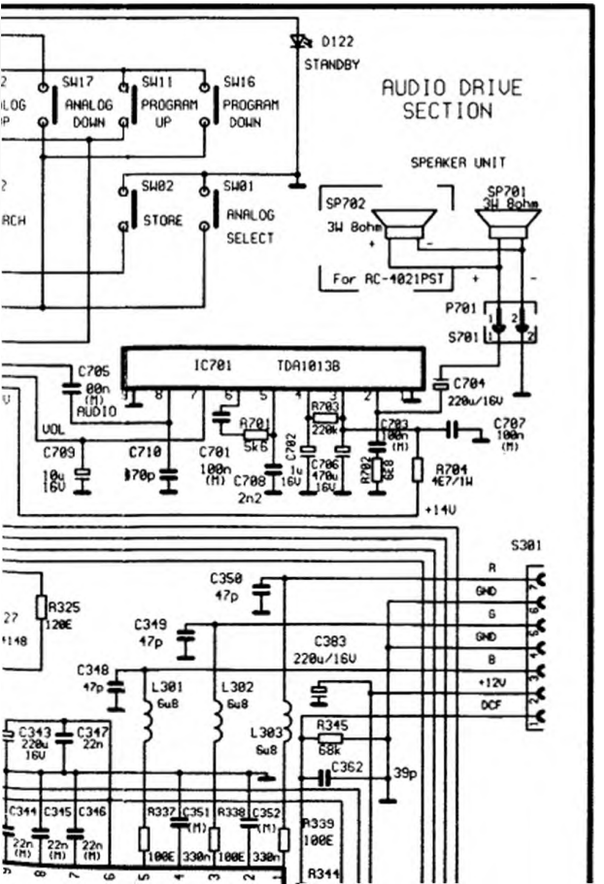

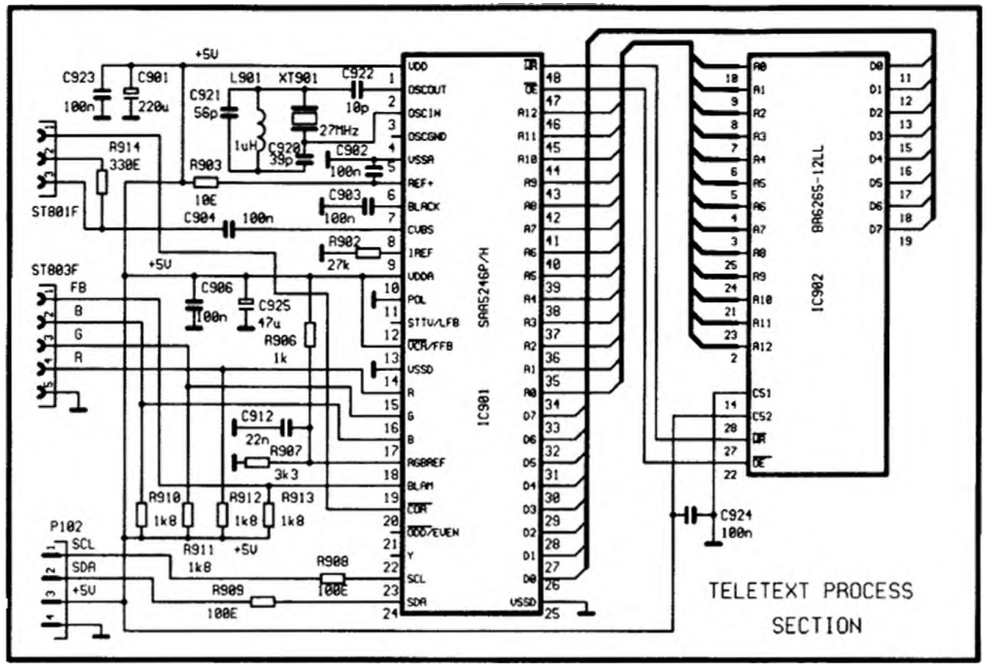

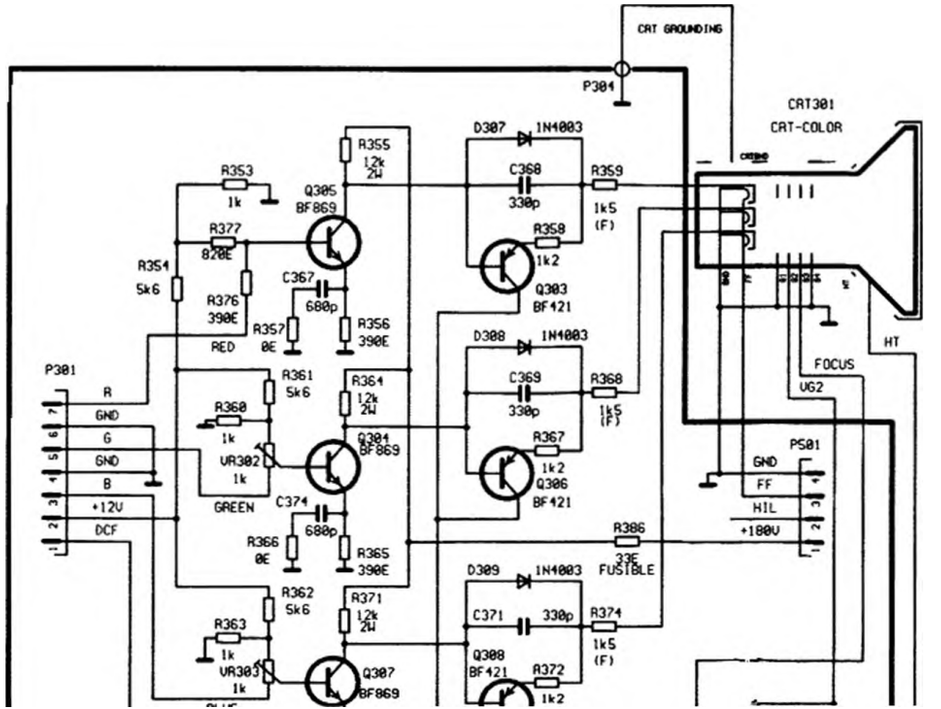

REMARK:

CONTROL RANGE TABLE

	MIN.	MAX.	CENTER
CONT.	2.8V	4.0V	
BRI.	0.9V	2.4V	
SAT	2.1V	3.3V	
HUE	1.5V	3.9V	2.8V

	A0	A1	A2
PCF8581	7b	8a	9b
PCF8582	7a	8b	9b

SCHEMATIC NOTES:

1. RESISTANCE IS SHOWN IN OHMS k=1.000 M=1.000.000
2. CAPACITANCE IS SHOWN IN u=uF n=nF p=pF
   T TANTALUM CAPACITOR
   M FILM CAPACITOR
3. —▭— STANDARD FILM RESISTOR (SFR25)
4. VOLTAGE READ WITH DIGITAL VOLTMETER FROM POINT INDICATED TO CHASSIS GROUND USING A NORMAL PICTURE
5. VOLTAGE READINGS SHOWN ARE NORMAL VALUES AND MAY VARY +/- 20% (EXCEPT H.V.)
6. SCHEMATIC SUBJECT TO CHANGE WITHOUT NOTICE