

## JOSH SMITH SIGNATURE

# JS-1250

Respected as much for his tone as his guitar skills, Josh Smith's concept for the ultimate guitar speaker involved combining the lows of the Eminence Tonespotter, the clean highs of the Wizard, and the natural grit and sparkle of the Red Fang alnico. The result is an extremely versatile speaker with vintage tone and the ability to handle the power of modern amps.

**12"** | 50 WATTS  
8 Ω



*"Ultimately I was looking for something that could work in any application, from clean Fender tones, as well as dirty Vox tones. I asked Eminence to combine several qualities of my favorite speakers into one, and they knocked it out of the park. I use it in all my amps." – Josh Smith*

### SPECIFICATION

Nominal Basket Diameter  
Nominal Impedance\*  
Power Rating\*  
Resonance (Fs)  
Usable Frequency Range  
Sensitivity\*  
DC Resistance (Re)  
Qts  
Magnet Weight  
Gap Height  
Voice Coil Diameter

12", 305 mm  
8 Ω  
50 W  
91.8 Hz  
80 Hz – 5.2 kHz  
101.4 dB  
6.42 Ω  
0.61  
38 oz.  
0.31", 8 mm  
1.75", 44.5 mm

### MOUNTING INFORMATION


Enclosure Type  
Closed Back  
Open Back  
Driver Volume Displaced  
Overall Diameter  
Baffle Hole Diameter  
Depth  
Front Sealing Gasket  
Rear Sealing Gasket  
Mounting Holes Diameter  
Mounting Holes B.C.D.  
Net Weight  
Shipping Weight

Acceptable  
Acceptable  
0.07 cu.ft., 2.0 liters  
12.17", 309.12 mm  
11.13", 282.7 mm  
5.23", 132.8 mm  
Yes  
No  
0.24", 6.1 mm  
11.75", 298.5 mm  
8.0 lbs , 3.95 kg  
9.8 lbs , 4.45 kg

### MATERIALS OF CONSTRUCTION

Copper voice coil  
Nomex former  
Ferrite magnet  
Stamped steel basket  
Full molded paper cone  
Zurette dust cap

### FREQUENCY RESPONSE & IMPEDANCE CURVE\*

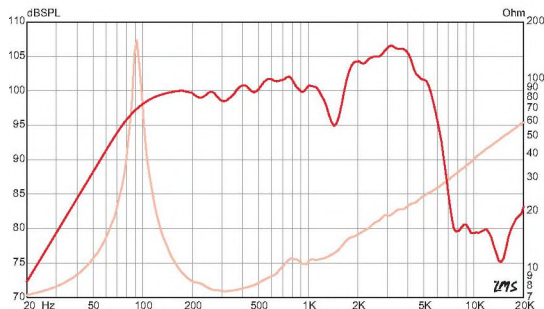

\* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.