

INTRODUCTION

The KA2418B/28B is a monolithic integrated circuit telephone tone ringer with bridge diode, when coupled with an appropriate transducer, it replaces the electromechanical bell. This device is designed for use with either a piezo transducer or an inexpensive transformer coupled speaker to produce a pleasing tone composed of a high frequencys ($f_{\rm H1}$, $f_{\rm H2}$) alternating with a low frequency ($f_{\rm S}$) resulting in a warble frequency. The supply voltage is obtained from the AC ring signal and the circuit is designed so that noise on the line or variation of the ringing signal can not affect correct operation of the device.

8-DIP-300

FEATURES

- . Built-in full wave bridge diode rectifier
- Low current consumption, in order to allow the parallel operation of the 4 devices
- Few external components
- Tone and adjustable switching frequencies by external components
- High noise immunity due to built-in voltage to current hysteresis
- · Adjustable activation voltage
- Internal zener diodes to protect against over voltages
- Adjustable Ringer impedance with external components.

ORDERING INFORMATION

Device	Package	Operating Temperature
KA2418B	8-DIP-300	- 20 ~ + 70℃
KA2428B	0-511-000	-20~+700

APPLICATIONS

- · Electronic telephone ringers
- · Extension ringers

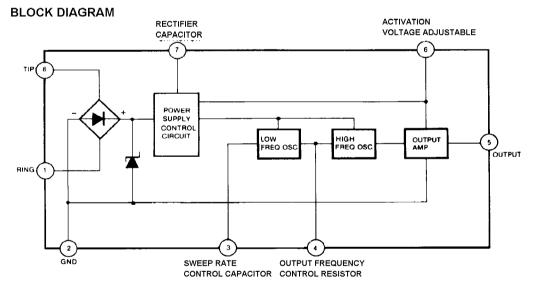


Fig. 1



ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

Characteristic	Symbol	Value	Unit
Calling Voltage (f = 50Hz) Continuous Calling Voltage (f = 50Hz)	Vc	120	Vrms
5 Sec ON/10 Sec OFF	V _{C (ON-OFF)}	200	Vrms
Supply Current	lcc	22	mA
Operating Temperature	T _{OPR}	- 20 ~ + 70	${\mathcal C}$
Storage and Junction Temperature	T _{STG}	- 65 ~ + 150	£

Absolute maximum ratings are those values beyond which permanent damage to the device may occur. These are stress ratings only and functional operation of the device at or beyond them is not implied. Long exposure to these conditions may affect device reliability.

DC ELECTRICAL CHARACTERISTICS (Ta = 25°C)

Characteristic	Symbol	Test Conditions	Min	Тур	Max	Unit
Operating Voltage	Vcc	_	_	_	26	٧
Current Consumption without Load	lcc	V _S = 8.8 to 26V		1.5	1.8	mA
Activiation Voltage	V _{ON}	_	12.2	_	13	V
Activiation Voltage Range	V _{ONR}	$R_A = 1k\Omega$	8	_	10	V
Sustaining Voltage	V _{SUS}	_	8	_	8.8	V
Differential Resistance in Off Condition	R _{D (OFF)}		6.4			kΩ
Output Voltage Swing	V _{O (P-P)}	_	_	V _{cc} -3	_	V
Short Circuit Current	Isc	V _S = 26V		35		mA

AC ELECTRICAL CHARACTERISTICS (Ta = 25°C)

Characteristic	Symbol	Test Conditions	Min	Тур	Max	Unit
Output Frequencies (KA2418B)	f _{Н1} f _{Н2}	V_{CC} = 26V, R_1 = 14k Ω V_{CC} = 0V V_{CC} = 6V	_ _	2300 1700	_	Hz Hz
Output Frequencies (KA2428B)	f _{H1} f _{H2}	V_{CC} = 26V, R_1 = 14k Ω V_{CC} = 0V V_{CC} = 6V	_ _	1900 1300	_	Hz Hz
f _{H1} Range	f _{H1R}	$R_1 = 27k\Omega$ to $1.7k\Omega$	0.1	_	15	KHz
Sweep Frequency	f _S	$R_1 = 14k\Omega$, $C_1 = 100nF$	_	10	_	Hz



APPLICATION CIRCUIT

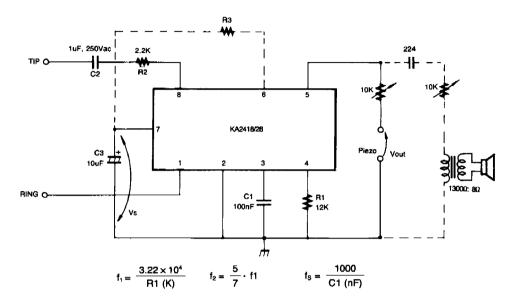


Fig. 2

DEVICE	KA2418B	KA2428B
f ₁	$\frac{3.22 \times 10^4}{\text{R1 (K)}}$	$\frac{2.66 \times 10^4}{\text{R1 (K)}}$
f _{H1} (R1 = 14Kohm)	2300 + 300 (Hz)	1900 + 100 (Hz)
f _{H2} (R1 = 14Kohm)	1700 + 300 (Hz)	1300 + 100 (Hz)



