

FEATURES


- Avalanche Rugged Technology
- Rugged Gate Oxide Technology
- Lower Input Capacitance
- Improved Gate Charge
- Extended Safe Operating Area
- Lower Leakage Current : 25 μ A (Max.) @ $V_{DS} = 700V$
- Low $R_{DS(ON)}$: 1.552 Ω (Typ.)

$$BV_{DSS} = 800 V$$

$$R_{DS(on)} = 0.95 \Omega$$

$$I_D = 10 A$$

TO-3P



1.Gate 2. Drain 3. Source

Absolute Maximum Ratings

Symbol	Characteristic	Value	Units
V_{DSS}	Drain-to-Source Voltage	800	V
I_D	Continuous Drain Current ($T_C=25^\circ C$)	10	A
	Continuous Drain Current ($T_C=100^\circ C$)	6.3	
I_{DM}	Drain Current-Pulsed	40	A
V_{GS}	Gate-to-Source Voltage	± 30	V
E_{AS}	Single Pulsed Avalanche Energy		mJ
I_{AR}	Avalanche Current	533	A
E_{AR}	Repetitive Avalanche Energy	10	mJ
dv/dt	Peak Diode Recovery dv/dt	28	V/ns
P_D	Total Power Dissipation ($T_C=25^\circ C$)	2.0	W
	Linear Derating Factor	280	
T_J, T_{STG}	Operating Junction and Storage Temperature Range	2.22 - 55 to +150	$^\circ C$
T_L	Maximum Lead Temp. for Soldering Purposes, 1/8" from case for 5-seconds	300	

Thermal Resistance

Symbol	Characteristic	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case	--	0.45	$^\circ C/W$
$R_{\theta CS}$	Case-to-Sink	0.24	--	
$R_{\theta JA}$	Junction-to-Ambient	--	40	

Electrical Characteristics ($T_C=25^\circ\text{C}$ unless otherwise specified)

Symbol	Characteristic	Min.	Typ.	Max.	Units	Test Condition
BV_{DSS}	Drain-Source Breakdown Voltage	800	--	--	V	$V_{GS}=0V, I_D=250\ \mu\text{A}$
$\Delta BV/\Delta T_J$	Breakdown Voltage Temp. Coeff.	--	1.02	--	V/°C	$I_D=250\ \mu\text{A}$ See Fig 7
$V_{GS(th)}$	Gate Threshold Voltage	2.0	--	3.5	V	$V_{DS}=5V, I_D=250\ \mu\text{A}$
I_{GSS}	Gate-Source Leakage , Forward	--	--	100	nA	$V_{GS}=30V$
	Gate-Source Leakage , Reverse	--	--	-100		$V_{GS}=-30V$
I_{DSS}	Drain-to-Source Leakage Current	--	--	25	μA	$V_{DS}=700V$
		--	--	250		$V_{DS}=560V, T_C=125\ ^\circ\text{C}$
$R_{DS(on)}$	Static Drain-Source On-State Resistance	--	--	0.95	Ω	$V_{GS}=10V, I_D=3A$ *
g_{fs}	Forward Transconductance	--	6.6	--		$V_{DS}=50V, I_D=3A$
C_{iss}	Input Capacitance	--	2700	3500	pF	$V_{GS}=0V, V_{DS}=25V, f=1\text{MHz}$ See Fig 5
C_{oss}	Output Capacitance	--	260	300		
C_{rss}	Reverse Transfer Capacitance	--	110	130		
$t_{d(on)}$	Turn-On Delay Time	--	29	70	ns	$V_{DD}=350V, I_D=6A,$ $R_G=11.5\Omega$ See Fig 13
t_r	Rise Time	--	58	125		
$t_{d(off)}$	Turn-Off Delay Time	--	152	315		
t_f	Fall Time	--	48	105		
Q_g	Total Gate Charge	--	125	165	nC	$V_{DS}=560V, V_{GS}=10V,$ $I_D=6A$ See Fig 6 & Fig 12
Q_{gs}	Gate-Source Charge	--	19.2	--		
Q_{gd}	Gate-Drain("Miller") Charge	--	55.4	--		

Source-Drain Diode Ratings and Characteristics

Symbol	Characteristic	Min.	Typ.	Max.	Units	Test Condition
I_S	Continuous Source Current	--	--	6.5	A	Integral reverse pn-diode in the MOSFET
I_{SM}	Pulsed-Source Current	--	--	40		
V_{SD}	Diode Forward Voltage	--	--	1.4	V	$T_J=25\ ^\circ\text{C}, I_S=6A, V_{GS}=0V$
t_{rr}	Reverse Recovery Time	--	620	--	ns	$T_J=25\ ^\circ\text{C}, I_F=6A$
Q_{rr}	Reverse Recovery Charge	--	10.17	--	μC	$di_F/dt=100A/\mu\text{s}$

Notes ;

- .. ζ Repetitive Rating : Pulse Width Limited by Maximum Junction Temperature
- .. $\epsilon L=23\text{mH}, I_{AS}=6.5A, V_{DD}=50V, R_G=27\Omega, \text{Starting } T_J=25\ ^\circ\text{C}$
- .. $\epsilon I_{SD} \leq 6A, di/dt \leq 200A/\mu\text{s}, V_{DD} \leq BV_{DSS}, \text{Starting } T_J=25\ ^\circ\text{C}$
- .. $\hat{\epsilon}$ Pulse Test : Pulse Width = 250 μs , Duty Cycle $\leq 2\%$
- .. $\ddot{\epsilon}$ Essentially Independent of Operating Temperature

Fig 1. Output Characteristics

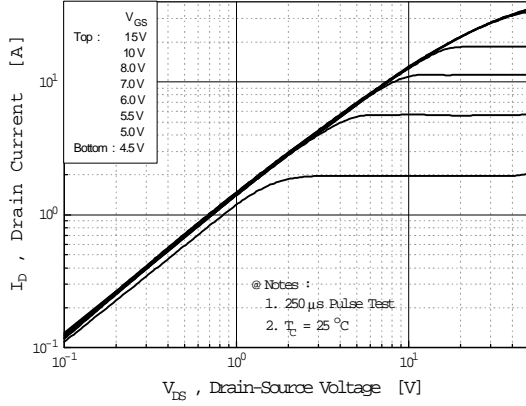


Fig 2. Transfer Characteristics

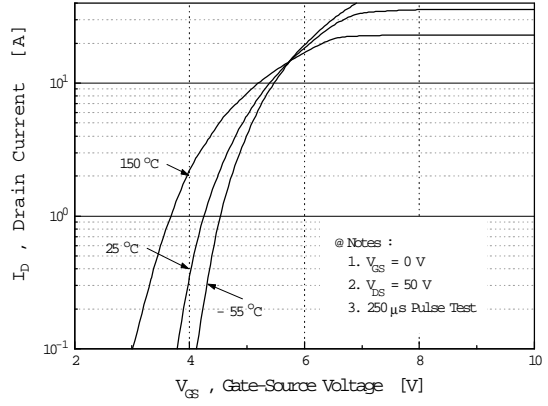


Fig 3. On-Resistance vs. Drain Current

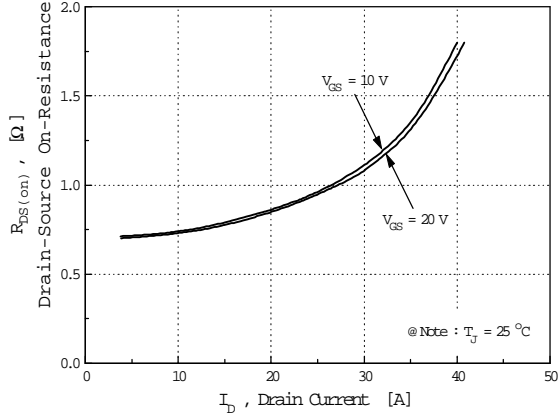


Fig 4. Source-Drain Diode Forward Voltage

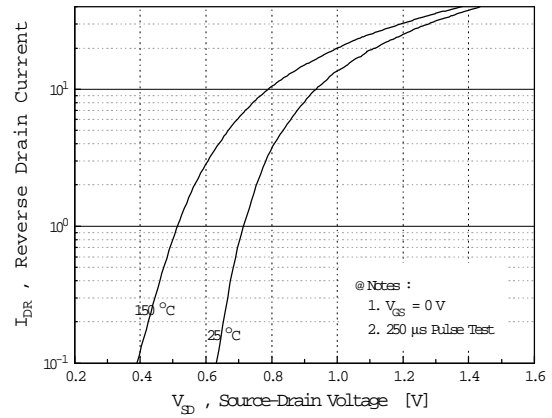


Fig 5. Capacitance vs. Drain-Source Voltage


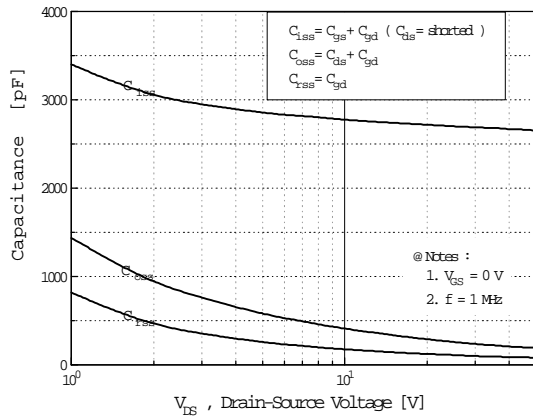


Fig 6. Gate Charge vs. Gate-Source Voltage

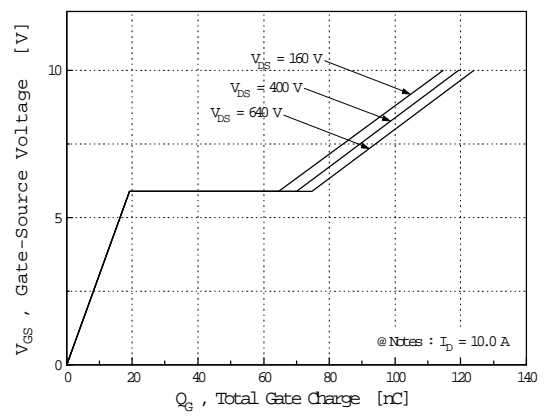

SSH10N80A

N-CHANNEL POWER MOSFET

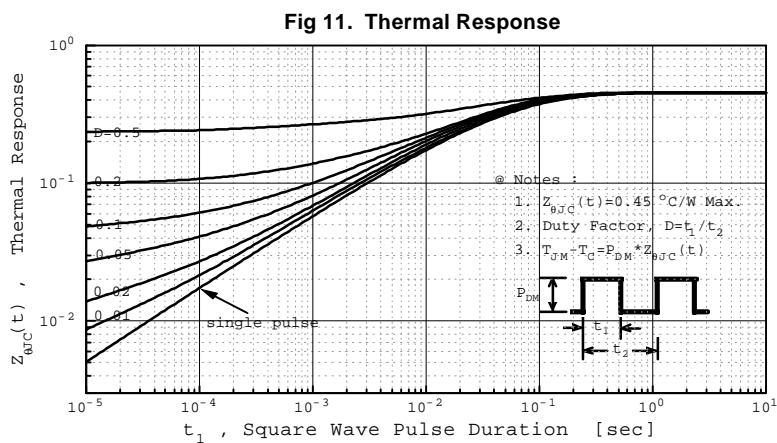
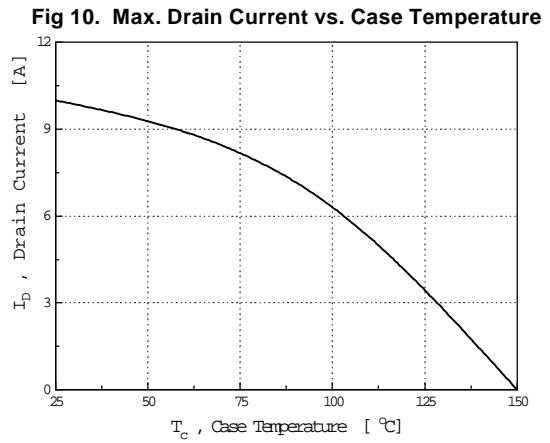
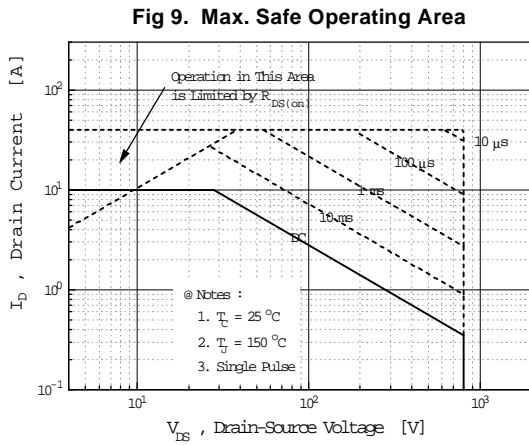
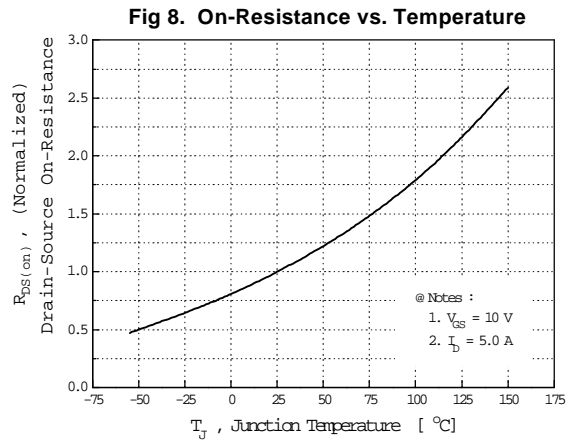
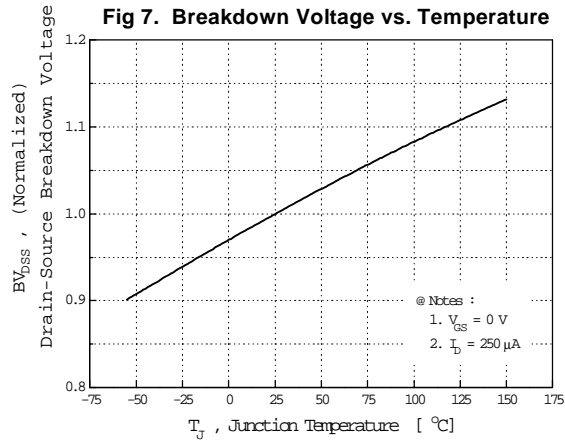


Fig 12. Gate Charge Test Circuit & Waveform

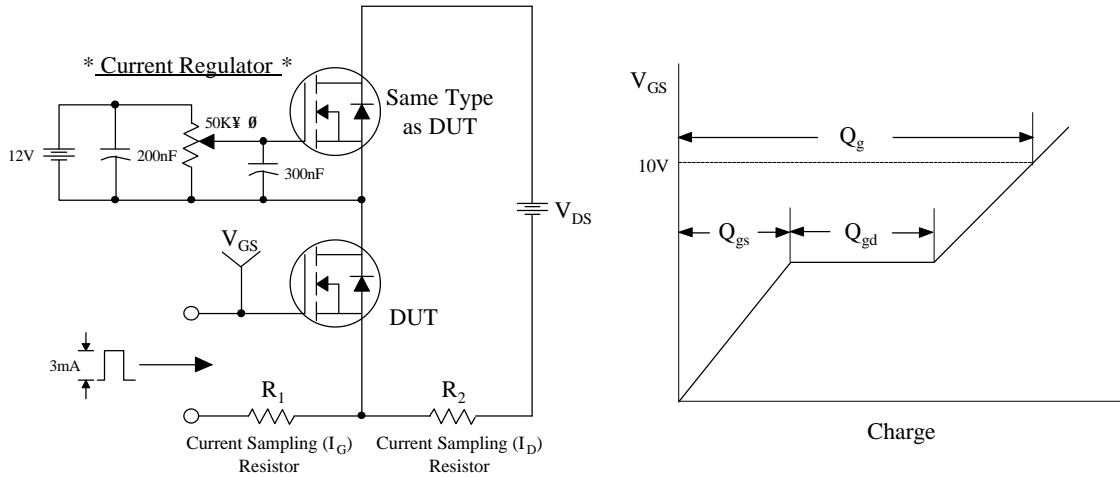


Fig 13. Resistive Switching Test Circuit & Waveforms

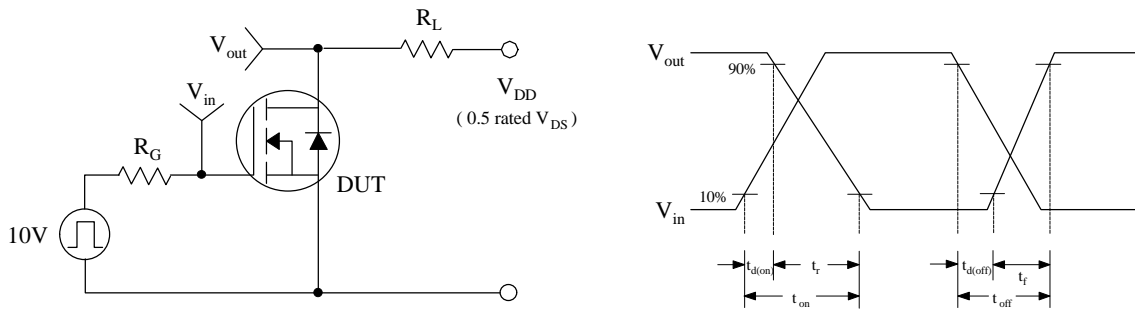


Fig 14. Unclamped Inductive Switching Test Circuit & Waveforms

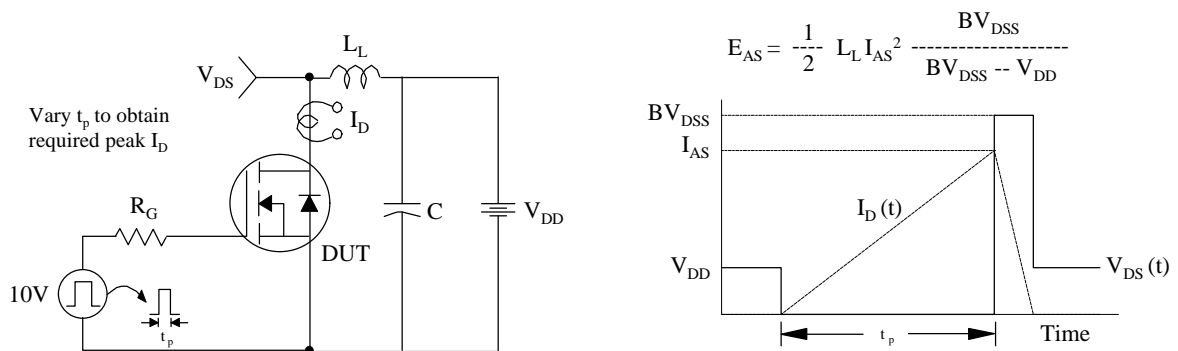


Fig 15. Peak Diode Recovery dv/dt Test Circuit & Waveforms

