

SIEMENS

Dual PNP-Operational Amplifiers

TAE 2453
TAF 2453


Bipolar IC

Features


- Supply voltage range between 3 V and 36 V
- Low current consumption, 0.8 mA typ.
- Extremely large control range
- Low output saturation voltage,
almost independent of load current
- Output current up to 70 mA (max. 100 mA)
- Output virtually short-circuit proof
- Wide common-mode voltage range
- Wide operating temperature range (TAF 2453 A; G)
- Pin-compatible to TBB 1458 B
- The characteristic curves of the electric parameters correspond to those of type TAE 1453 A; G

Applications

- Amplifier
- Level converter
- Driver
- Zero voltage switch
- Comparator

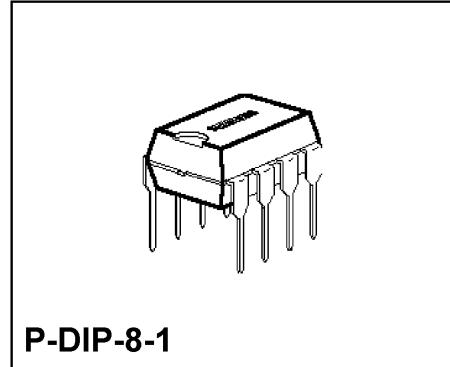

P-DIP-8-1

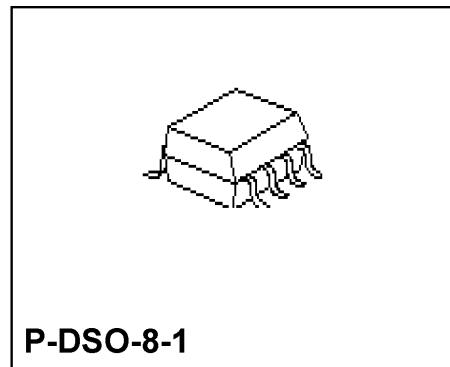

P-DSO-8-1

Type	Ordering Code	Package
■ TAE 2453 A	Q67000-A2107	P-DIP-8-1
TAE 2453 G	Q67000-A2108	P-DSO-8-1 (SMD)
■ TAF 2453 A	Q67000-A2210	P-DIP-8-1
TAF 2453 G	Q67000-A2211	P-DSO-8-1 (SMD)


■ Not for new design

The TAF 2453 / TAE 2453 consists of two independent, frequency-compensated op amps, each having a PNP-input differential stage and an open collector output. The


integrated regulator provides for all parameters a large degree of independence from the supply voltage.


Pin Configurations

(top view)

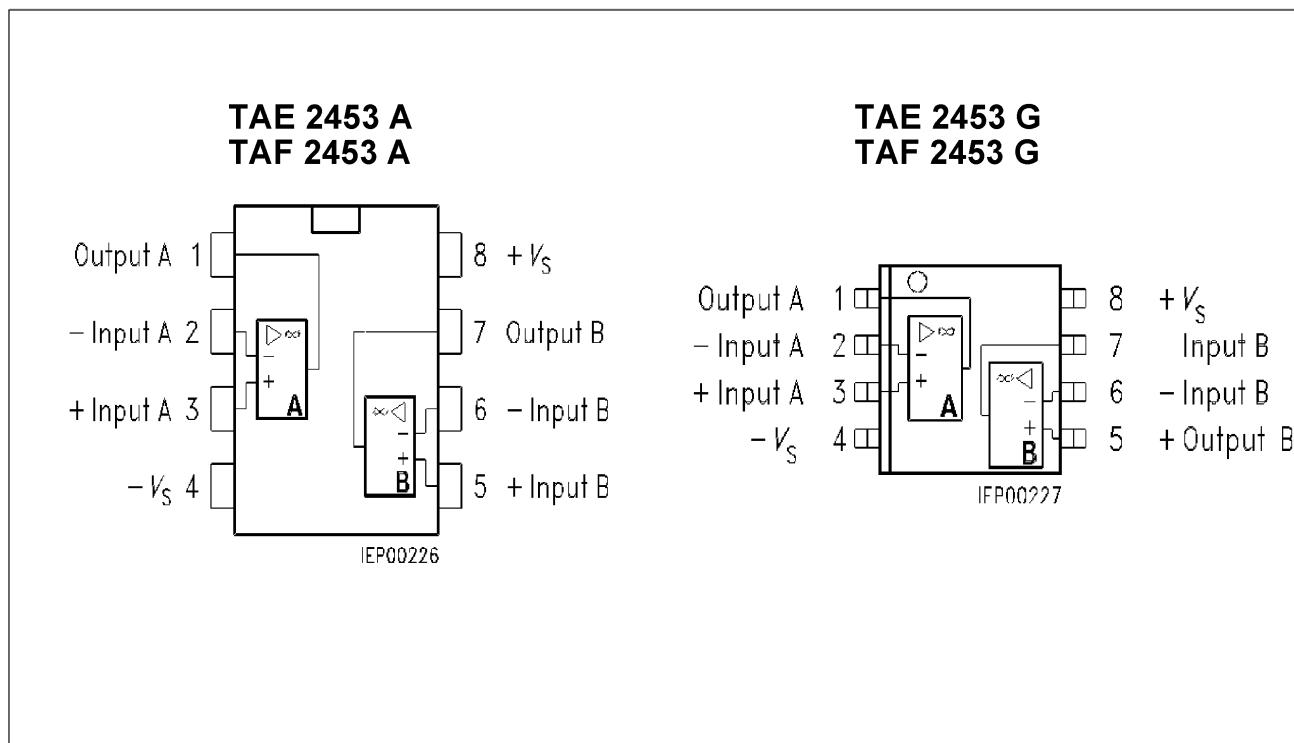

$$R_L = \text{load resistance} \\ (\text{collector resistance})$$

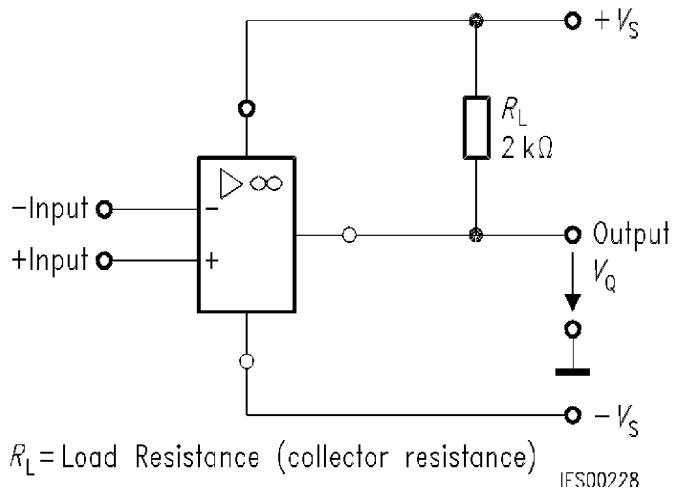**Connection Diagram**

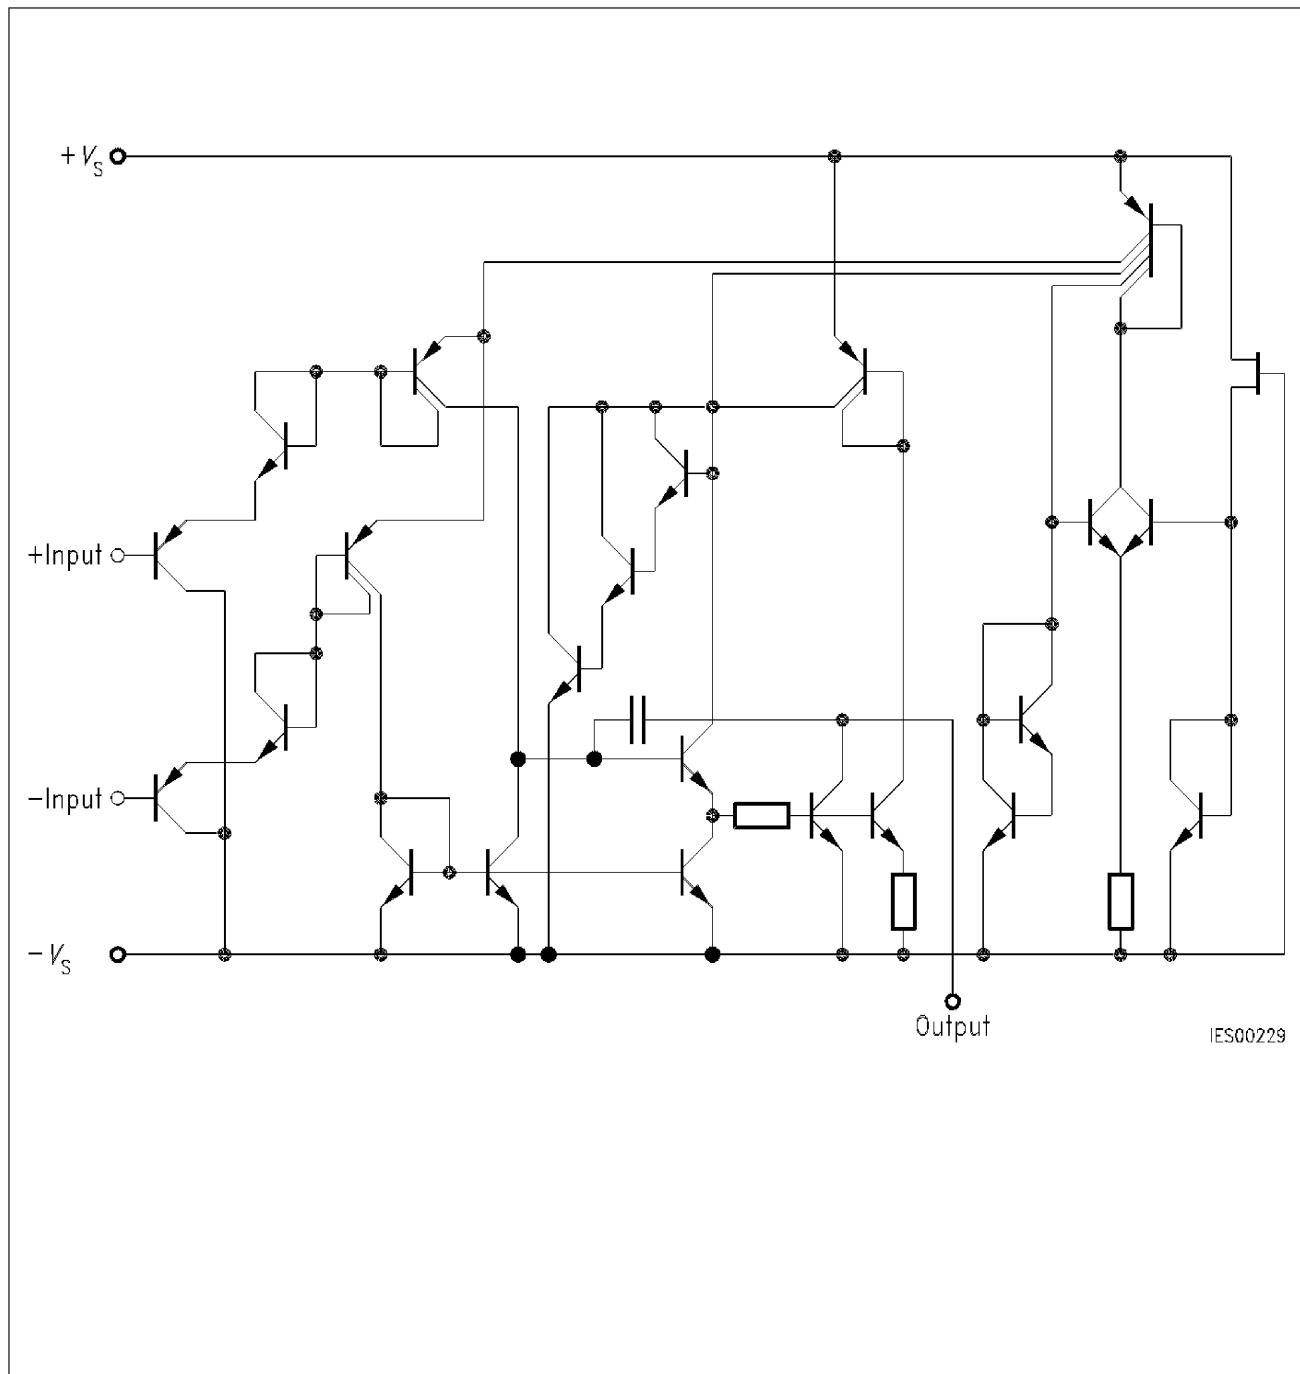**Circuit Diagram**

Absolute Maximum Ratings (TAE 2453)

Parameter	Symbol	Limit Values		Unit
Supply voltage	V_S	± 18		V
Output current	I_Q	100		mA
Differential input voltage	V_{ID}	$\pm V_S$		V
Junction temperature	T_j	150		°C
Storage temperature range	T_{stg}	– 55 to 125		°C
Thermal resistance system - air	$R_{th\ SA}$	100		K/W
	$R_{th\ SA}$	170		K/W

Operating Range (TAE 2453)

Supply voltage	V_S	± 2 to ± 18 (± 1.5 V with slightly increased offset voltage)	V
Ambient temperature	T_A	– 25 to 85	°C

Characteristics (TAE 2453)

$V_S = \pm 5$ V to ± 15 V; $R_L = 10$ kΩ,
unless otherwise specified

Parameter	Symbol	Limit Values $T_A = 25$ °C			Limit Values $T_A = -25$ to 85 °C		Unit
		min.	typ.	max.	min.	max.	
Open-loop supply current consumption, total	I_S		0.8	1.5		1.8	mA
Input offset voltage $R_G = 50$ Ω	V_{IO}	– 5.5		5.5	– 7	7	mV
Input offset current Input current	I_{IO} I_I	– 15	40	15 150	– 100	100 200	nA nA

Characteristics (TAE 2453) (cont'd) $V_S = \pm 5 \text{ V}$ to $\pm 15 \text{ V}$; $R_L = 10 \text{ k}\Omega$,

unless otherwise specified

Parameter	Symbol	Limit Values $T_A = 25 \text{ }^\circ\text{C}$			Limit Values $T_A = -25 \text{ to } 85 \text{ }^\circ\text{C}$		Unit
		min.	typ.	max.	min.	max.	
Control range $R_L = 2 \text{ k}\Omega$, $V_S = \pm 15 \text{ V}$ $R_L = 620 \Omega$, $V_S = \pm 15 \text{ V}$	$V_{Q_{PP}}$ $V_{Q_{PP}}$	14.9 14.9			-14.7 -14.5	14.9 14.9	-14.7 -14.4
Input impedance, $f = 1 \text{ kHz}$	Z_I		200				$\text{k}\Omega$
Open-loop voltage gain, $R_L = 2 \text{ k}\Omega$	G_{V_0}	80	85		80		dB
Output reverse current	I_{QR}			10		20	μA
Common-mode input voltage range, $R_L = 2 \text{ k}\Omega$	V_{IC}	$-V_S$ -0.2		V_S -1.8	$-V_S$	V_S -2.0	V
Common-mode rejection, $R_L = 2 \text{ k}\Omega$	k_{CMR}	75	80		75		dB
Supply voltage rejection $G_V = 100$	k_{SVR}		25	100		100	$\mu\text{V/V}$
Temperature coefficient of I_{IO} $R_G = 50 \Omega$	α_{IIO}		0.1				nA/K
Temperature coefficient of V_{IO} $R_G = 50 \Omega$	α_{VIO}		6				$\mu\text{V/K}$
Slew rate for non-inverting operation	SR		1				$\text{V}/\mu\text{s}$
Slew rate for inverting operation	SR		1				$\text{V}/\mu\text{s}$

Characteristics (TAE 2453) $V_S = \pm 2 \text{ V}$, $R_L = 10 \text{ k}\Omega$

Parameter	Symbol	Limit Values $T_A = 25 \text{ }^\circ\text{C}$			Limit Values $T_A = -25 \text{ to } 85 \text{ }^\circ\text{C}$		Unit
		min.	typ.	max.	min.	max.	
Input offset voltage, $R_G = 50 \Omega$	V_{IO}	- 6		6	- 7.5	7.5	mV
Input offset current Input current	I_{IO} I_I	- 75	40	75 150	- 100	100 200	nA nA
Open-loop voltage gain	G_{V0}	70			70		dB

Absolute Maximum Ratings (TAF 2453)

Parameter	Symbol	Limit Values		Unit
Supply voltage	V_S	± 18		V
Output current	I_Q	100		mA
Differential input voltage	V_{ID}	$\pm V_S$		V
Junction temperature Storage temperature range	T_j T_{stg}	150 - 55 to 150		${}^\circ\text{C}$ ${}^\circ\text{C}$
Thermal resistance system - air TAF 2453 A TAF 2453 G	$R_{th \text{ SA}}$ $R_{th \text{ SA}}$	100 170		K/W K/W

Operating Range (TAF 2453)

Supply voltage	V_S	$\pm 2 \text{ to } \pm 18$ ($\pm 1.5 \text{ V}$ with slightly increased offset voltage)	V
Ambient temperature	T_A	- 55 to 125	${}^\circ\text{C}$

Characteristics (TAF 2453)

$V_S = \pm 5 \text{ V}$ to $\pm 15 \text{ V}$; $R_L = 2 \text{ k}\Omega$,
unless otherwise specified

Parameter	Symbol	Limit Values $T_A = 25 \text{ }^\circ\text{C}$			Limit Values $T_A = -55$ to $125 \text{ }^\circ\text{C}$		Unit
		min.	typ.	max.	min.	max.	
Open-loop supply current consumption total	I_S		0.8	1.5		1.8	mA
Input offset voltage, $R_G = 50 \Omega$	V_{IO}	- 4		4	- 6	6	mV
Input offset current Input current	I_{IO} I_I	- 10	40	10 100	- 75	75 150	nA nA
Control range $R_L = 2 \text{ k}\Omega$, $V_S = \pm 15 \text{ V}$ $R_L = 620 \Omega$, $V_S = \pm 15 \text{ V}$	$V_{Q\text{ pp}}$ $V_{Q\text{ pp}}$	14.9 14.9		- 14.7 - 14.5	14.8 14.8	- 14.7 - 14.4	V V
Input impedance, $f = 1 \text{ kHz}$	Z_I		200				k Ω
Open-loop voltage gain $R_L = 2 \text{ k}\Omega$	G_{V0}	85	87		80		dB
Output reverse current	I_{QR}			1		5	μA
Common-mode input voltage range	V_{IC}	- V_S - 0.3		V_S - 1.5	- V_S	V_S - 1.8	V
Common-mode rejection, $R_L = 2 \text{ k}\Omega$	k_{CMR}	80	85		75		dB
Supply voltage rejection $G_V = 100$	k_{SVR}		25	100		100	$\mu\text{V/V}$

Characteristics (TAF 2453) (cont'd)

$V_S = \pm 5 \text{ V}$ to $\pm 15 \text{ V}$; $R_L = 2 \text{ k}\Omega$,
unless otherwise specified

Parameter	Symbol	Limit Values $T_A = 25 \text{ }^\circ\text{C}$			Limit Values $T_A = -55$ to $125 \text{ }^\circ\text{C}$		Unit
		min.	typ.	max.	min.	max.	
Temperature coefficient of I_{IO} $R_G = 50 \Omega$	α_{II0}		0.1	0.8		0.8	nA/K
Temperature coefficient of V_{IO} $R_G = 50 \Omega$	α_{VIO}		6	25		25	$\mu\text{V/K}$
Slew rate for non-inverting operation	SR		1				$\text{V}/\mu\text{s}$
Slew rate for inverting operation	SR		1				$\text{V}/\mu\text{s}$

Characteristics (TAF 2453)

$V_S = \pm 2 \text{ V}$

Parameter	Symbol	Limit Values $T_A = 25 \text{ }^\circ\text{C}$			Limit Values $T_A = -55$ to $125 \text{ }^\circ\text{C}$		Unit
		min.	typ.	max.	min.	max.	
Input offset voltage, $R_G = 50 \Omega$	V_{IO}	-4		4	-6	6	mV
Input offset current Input current	I_{IO} I_I	-50	40	50 100	-75	75 150	nA nA
Open-loop voltage gain, $R_L = 2 \text{ k}\Omega$	G_{V0}	75			70		dB

Note: For typical performance curves, please refer to the data sheets of TAE 1453 and TAF 1453.