

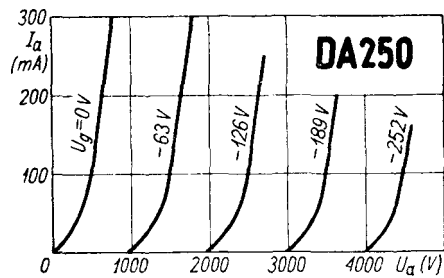


T.			U_f	I_f	Cl.	f	U_a	U_g	I_a	I_g	$U_{g \approx}$	P_{dr}	$R_{a/a}$	P_o	S	μ	P_a
			V	A		MHz	V	V	mA	mA	V	W	k Ω	W	mA/V	V/V	W
DA 250	MOG	1	10	2	A 1 AB 1 AB 2 stat.		2500 2500 2500 2500	-126 -145 -145	100 (50 ÷ 180) × 2 (50 ÷ 250) × 2		145 × 2 200 × 2		(17,5) 12 12	90 400 800	7	16	250 × 2 190 × 2 250
SRS 326	RFT	2	7	8,5	C-Tgr stat.	30 50	3000 2000 3500	-150 100	200 100	40	270	15		450	5	30	250
TYS 2-250	Mul	3	6,5	12	C-Tgr stat.	10 75 75	2000 2000 2000 2500	-290 -250 -350	400 400 80	60 50			760 550	3,5	10,5	250	



T.	C_g	C_a	$C_{g/a}$
	pF	pF	pF
DA 250	21	6	41
SRS 326	7	0,7	4,4
TYS 2-250	5	1	11,4

