

6 1/2" - PAPER CONE DRIVER - 170 mm

CLASSIC SERIES


High loss-High compliance rubber surround
Critically damped paper cone
Stamped steel chassis
High temperature voice coil
Aluminium voice coil former
Extended bass response (Fs : 40 Hz)


Suspension caoutchouc amortissant h^e compliance
Cone papier traité amortissant
Chassis acier embouti
Bobine haute température
Support bobine aluminium
Réponse étendue dans le grave (Fs : 40 Hz)



Designed for high-end compact 2 way systems, this 6 1/2" bass-midrange driver features a state of the art curvilinear paper cone, which is critically damped and coupled to a high loss rubber surround. Special consideration has been taken to ensure a smooth response, natural roll-off. A newly designed cosmetic ring helps to reduce edge diffraction. The high temperature, 1° voice coil, wound onto aluminium former, ensures excellent power handling. The "Suggested applications" charts indicate various driver loads, included the box alignment used to measure the response curve (Vb REF). The response curves shown on the diagram indicate the predicted low end response of the driver in the suggested box volume (Vb) with suggested port (Dp-Lp).

Ce grave-médium de 170 mm est destiné à des systèmes compacts haut de gamme 2 voies. Il est doté d'un cône en papier traité à profil curviligne associé à une suspension caoutchouc amortissant haute compliance. Un soin particulier a été apporté à cet ensemble afin d'assurer une réponse en fréquence linéaire ainsi qu'une coupure haute naturelle. Une nouvelle esthétique est également proposée par la présence d'une couronne décorative. La bobine haute température sur support aluminium autorise une puissance admissible importante. Le tableau "Suggested applications" indique différents types de charge dont celui utilisé pour la mesure de la courbe de réponse (Vb REF). Les courbes publiées correspondent à la réponse dans le grave pour un volume (Vb) et une dimension d'évent donnée (Vp-Lp).

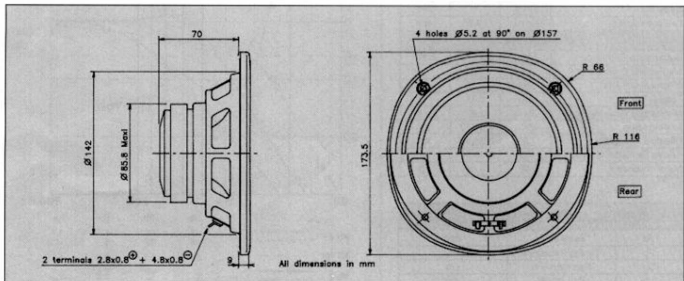

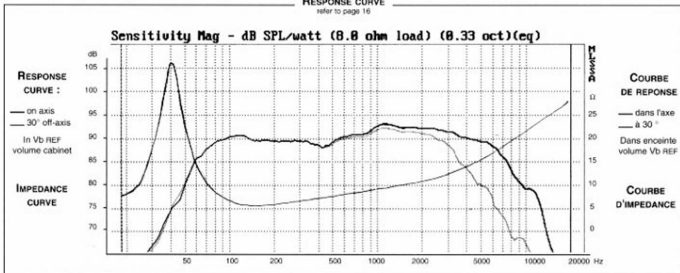RESPONSE CURVE
 refer to page 16


SPECIFICATIONS

Technical Characteristics	Symbol	Value	Units
---------------------------	--------	-------	-------

PRIMARY APPLICATION

Nominal Impedance	Z	8	Ω
Resonance Frequency	Fs	40	Hz
Nominal Power Handling	P	60	W
Sensitivity	E	90	dB

VOICE COIL

Voice coil diameter	\varnothing	30	mm
Minimum Impedance	Zmin	5,4	Ω
DC Resistance	Re	5,2	Ω
Voice Coil Inductance	Lbm	0,42	mH
Voice coil Length	h	12	mm
Former	-	Aluminium	-
Number of layers	n	2	-

MAGNET

Magnet dimensions	\varnothing x h	84x15	mm
Magnet weight	m	0,31	kg
Flux density	B	1	T
Force factor	BL	5,5	NA ¹
Height of magnetic gap	He	5	mm
Stray flux	Fmag	-	Am ¹
Linear excursion	Xmax	$\pm 3,5$	mm


PARAMETERS

Suspension Compliance	Cms	$1,45 \cdot 10^{-3}$	mN ¹
Mechanical Q Factor	Cms	3,24	-
Electrical Q Factor	Qes	0,47	-
Total Q Factor	Qts	0,41	-
Mechanical Resistance	Rms	0,84	kg s ⁻¹
Moving Mass	Mms	$10,9 \cdot 10^{-3}$	kg
Effective Piston Area	S	$1,39 \cdot 10^{-2}$	m ²
Volume Equivalent of Air at Cas	Vas	$39 \cdot 10^{-3}$	m ³
Mass of speaker	M	1,05	kg

APPLICATION PARAMETERS


Vb	Box volume	dm ³
Fb	Tuning frequency	Hz
Dp	Port diameter	cm
Lp	Port length	cm

IMPULSE RESPONSE




WATERFALL

refer to page 16

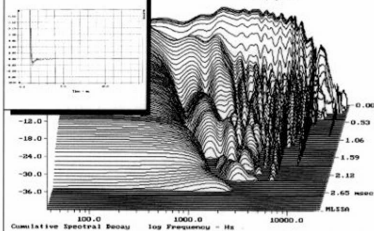

SUGGESTED APPLICATIONS

refer to page 8 to 13

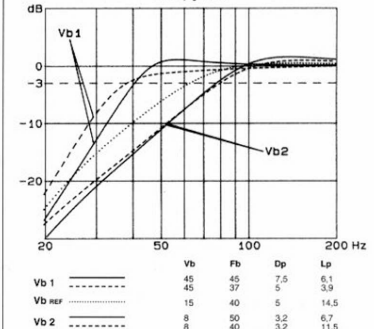

Please refer to method of measurement and measurement conditions pages 15 to 19.

Audax may, without prior notification modify the specifications on its products further to research and development requirements.